


MORNSUN®

15-350W SINGLE OUTPUT

Enclosed Switching Power Supply

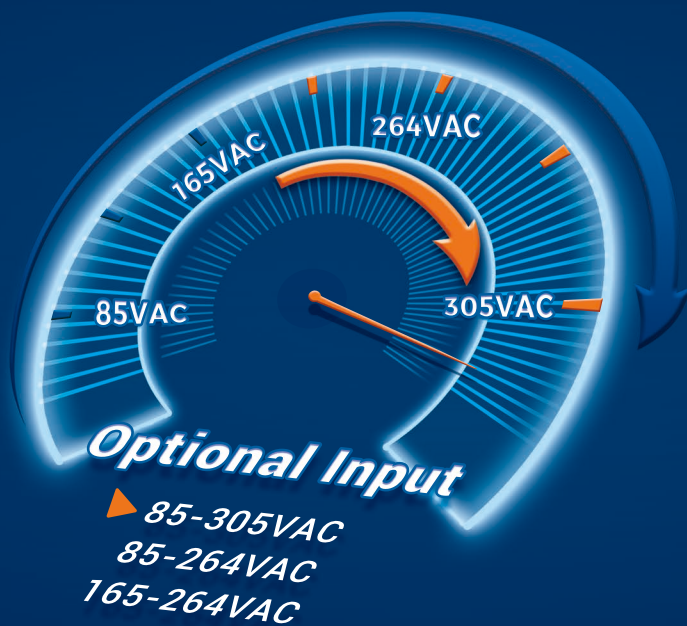

✓ **Reliable performance**

- Isolation voltage up to 4000VAC
- -30°C to 70°C operating temperature
- EMI: CISPR32/EN55032/CLASS B
- Complete certifications:
IEC/EN/UL62368, EN60335, EN61558



LM Series



Quick response
with local service



Customization
is available



FAE/R&D
technical support

| Series | Power (W) | Vin (VAC) | Isolation (VAC) |
|----------|--------------|----------------|--------------------|
| LMxx-20B | 35-350 | 85-264 | 4000 |
| LMxx-22B | 35-150 | 165-264 | 4000 |
| LMxx-23B | 15-150 | 85-305 | 4000 |
| LMxx-10B | 200-350 | 90-132/180-264 | 3000 |
| LMxx-12B | 200-350 | 176-264 | 3000 |

Note: conformal coating and terminal cover are optional.



For details

* For detailed information, please refer to the datasheet.