

Wire-to-Board Connectors





IMPORTANT INFORMATION/DISCLAIMER

All product specifications, statements, information and data (collectively, the "Information") in this datasheet or made available on the website are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on AVX's knowledge of typical operating conditions for such applications, but are not intended to constitute and AVX specifically disclaims any warranty concerning suitability for a specific customer application or use.

ANY USE OF PRODUCT OUTSIDE OF SPECIFICATIONS OR ANY STORAGE OR INSTALLATION INCONSISTENT WITH PRODUCT GUIDANCE VOIDS ANY WARRANTY.

The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by AVX with reference to the use of AVX's products is given without regard, and AVX assumes no obligation or liability for the advice given or results obtained.

Although AVX designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, AVX has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that AVX makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does AVX warrant or guarantee suitability for any customer design or manufacturing process.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.

WIRE-TO-BOARD CONNECTORS

Table of Contents



STANDARD 26-28 AWG: 00-9175		SINGLE TINE PTH 18-24 AWG: 9176-600	
General Information	1	General Information	4
2 Position	2	1 Position - Through Wire	4
3 Position	3	1 Position - Wire Stop	4
Accessory Cap - Through Wire	4	Assembly - Through Wire and Wire Stop	4
Accessory Cap - Wire Stop	5		
Hand Insertion Tooling / Clearance Area on PCB for Hand Tooling	6	SINGLE TINE SMT 18-24 AWG: 9176-650	
Insertion Tooling Requires Hand Press with Flat Rock Plates	7	General Information	
		1 Position - Through Wire	5
CAPPED IDC 26-28 AWG: 9175-700		1 Position - Wire Stop	
General Information		Assembly - Through Wire and Wire Stop	5
2 Position - Through Wire	9		
3 Position - Through Wire	10	LOW PROFILE IDC 22-30 AWG: 9176-800	
2 Position - Wire Stop	11	General Information	
3 Position - Wire Stop		1 Position	
Assembly - Through Wire and Wire Stop	13	2 Position	
		3 Position	
STANDARD IDC 18-24 AWG: 00-9176		4 Position	
General Information		Conector Details	5
1 Position	16		
2 Position	17	STANDARD 14-20 AWG: 00-9177	
3 Position	18	General Information	
Accessory Cap - Through Wire	19	1 Position	
Accessory Cap - Wire Stop	20	2 Position	
Hand Insertion Tooling for Single 18/24 Gauge Wire	21	3 Position	
Insertion Tooling Requires Hand Press with Flat Rock Plates	22	Assessory Cap - Through Wire	
Hand Insertion Tooling for One Way Cap Insertion /		Assessory Cap - Wire Stop	
Clearance Area on PCB for Hand Tooling		Insertion Tooling	
Assembled Connector	24	Assembled Connector	6
CAPPED 18-24 AWG: 9176-700		CAPPED THRU HOLE 12-18 AWG: 00-9177	
General Information	25	General Information	6
1 Position - Through Wire	26	1 Position - Through Wire	
2 Position - Through Wire		1 Position - Wire Stop	
3 Position - Through Wire			
1 Position - Wire Stop		SINGLE THRU HOLE IDC CONTACT	
2 Position - Wire Stop		12-18 AWG: 9177-600	
3 Position - Wire Stop		General Information	7
Assembly - Through Wire and Wire Stop		Contact Details	7
		Assembly Tooling	7
SINGLE IDC CONTACT 22-28 AWG: 9176-400		Accessory Cap - Through Wire	7
General Information	33	Accessory Cap - Wire Stop	
Contact Details	34	• • •	
PCB Layout	35	POKE-HOME: HORIZONTAL	
Assembly Tooling	36	18-26 AWG: 00-9276	
Cap Details		General Information	<mark>7</mark>
		Wire Assembly/Wire Extraction	<mark>7</mark>
SINGLE IDC CONTACT 18-24 AWG: 9176-500		1 Position	<mark>7</mark>
General Information	39	2 Position	<mark>7</mark>
Contact Details	40	3 Position	8
PBC Layout	41	4 Position	8
Assembly Tooling	42	6 Position	8
Cap Details	44	8 Position	8
-			

WIRE-TO-BOARD CONNECTORS

Table of Contents



POKE-HOME: SINGLE HORIZONTAL CONTACT 12-28 AWG: 70-9296	
General Information84	ļ
1.7mm85	j
2mm86)
2.5mm	,
2.5mm - No Stop88	
3mm89)
4mm90)
Connector Assembly / Contact Opening Tool91	
POKE-HOME: VERTICAL TOP ENTRY 18-26 AWG: 00-9296	
General Information92	2
1 Position93	3
2 Position94	ŀ
3 Position95	,
4 Position96	•
5 Position97	,
6 Position98	1
Connector Assembly / Contact Opening Tool99)
POKE-HOME: INVERTED THRU BOARD	
18-26 AWG: 00-9296	
General Information100)
1 Position101	
2 Position102	
3 Position	
4 Position	Ĺ
5 Position	5
6 Position	6
Wire Strip Length107	,
SINGLE VERTICAL TOP ENTRY	
18 AWG: 58-9296	
General Information108	1
Single Vertical Top Entry109)
POKE-HOME: SINGLE VERTICAL CONTACT 18-24 AWG: 70-9296	
General Information110	
Top Side Contact - Bottom Entry Wire (FR4 Board)111	
Through Board Contact - Top Entry Wire (FR4 Board)112	
Top Side Contact - Bottom Entry Wire (Metal Board)113	
Through Board Contact - Top Entry Wire (Metal Board)114	
Wire Trim Details115	i
POKE-HOME: MICRO SINGLE VERTICAL CONTACT 22-26 AWG: 70-9296	
General Information	
Top Side Contact - Bottom Entry Wire (FR4 Board)	
Through Board Contact - Top Entry Wire (FR4 Board)	
Top Side Contact - Bottom Entry Wire (Metal Board)	
I brough Doord Contoot Ton Entry Miro (Motol Doord) 120	4

POKE-HOME: LOW PROFILE HORIZONTA	ΑL
20-26 AWG: 9296-200	

General Information	122
1 Position	123
2 Position	1 <mark>2</mark> 4
3 Position	125
4 Position	126
5 Position	127
6 Position	128
Assembly	129

Wire Trim Details......121

STANDARD 26-28 AWG: 00-9175

General Information





The 917X series of surface mount Insulation Displacement Connectors (IDC) were developed to meet the harsh automotive and industrial market applications for connecting individual wires directly to a PCB ranging from 14 AWG to 28 AWG. This industry proven contact system has been tested to automotive levels of shock, vibration, and temperature cycling to prove their reliability and robustness. The simplicity of inserting a wire into the connector with a small tool allows a wide range of devices to be connected to the PCB without soldering. In SSL applications specifically, these connectors are used to bring power and signal onto the PCB or are used to daisy chain multiple boards together in a long string. While the IDC contact provides a gas-tight connection to conductor of the wire, the housing has been designed to grab the insulation of the wire to provide a positive strain relief even in the harshest conditions. In case of repair, the wires can be removed and replace up to three times.

The 9175 series accepts 26 AWG to 28 AWG wires with an insulation diameter ranging from 0.7mm to 1.0mm. These single contact connectors support a 1 amp current rating and have a split SMT tail design to provide maximum stability on the PCB. Available in a 2p and 3p configuration, these connectors can be end stackable for higher pin counts.

APPLICATIONS

- Connecting discrete wire components directly to the PCB
- Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- Application Notes: refer to 201-01-124

FEATURES AND BENEFITS

- · IDC contact provides a gas-tight connection to the PCB for long term reliability
- Connector housing captures the wire insulation for positive strain relief
- · Tested to automotive levels on shock, vibration and temperature cycling for reliability
- · Low and high volume assembly tools to match production volumes
- Reduced total applied cost versus solder or crimp processes
- High temperature insulator capable to 260 degrees C reflow soldering processes

ELECTRICAL

Current Rating: 1 Amp / Contact

9159

Voltage Rating: 150 VAC

ENVIRONMENTAL


 Operating Temperature: -40°C to +125°C


MECHANICAL

- Insulator Material: Nylon 46: UL94V0
- · Contact Material: Phosphor Bronze
- Plating: Tin over Nickel
- Durability: 3 Cycles

HOW TO ORDER

00





00X







CONNECTOR/TOOLING PART NUMBER MATRIX


00X


	SERIES 9175 IDC				HAND INSERTION TOOLING*			ACCESSORY CAPS	
AWG	Wire Insulation	Positions	Color	Part Number	Plastic (medium volume)	Metal (high volume)	Mass Termination	Though Wire	Wire Stop
26	Ø 0.7 - 1.0	2p	White	009175002002906	069175701601000	069175701701000	069175701701002	609175002010100	609175002010199
26	Ø 0.7 - 1.0	2p	Black	009175002002806	069175701601000	069175701701000	069175701701002	609175002010000	609175002010099
26	Ø 0.7 - 1.0	3р	White	009175003002906	069175701601000	069175701701000	069175701701003	609175003010100	609175003010199
26	Ø 0.7 - 1.0	3р	Black	009175003002806	069175701601000	069175701701000	069175701701003	609175003010000	609175003010099
28	Ø 0.7 - 1.0	2p	White	009175002001906	069175701601000	069175701701000	069175701701002	609175002010100	609175002010199
28	Ø 0.7 - 1.0	2p	Black	009175002001806	069175701601000	069175701701000	069175701701002	609175002010000	609175002010099
28	Ø 0.7 - 1.0	3р	White	009175003001906	069175701601000	069175701701000	069175701701003	609175003010100	609175003010199
28	Ø 0.7 - 1.0	3р	Black	009175003001806	069175701601000	069175701701000	069175701701003	609175003010000	609175003010099
				* Hand Insertion Tooli	ng - Universal Hand Tool 06	7000773001000; Consult Ap	pplication Notes 201-01-124	ı	

Certification: UL File #E90723



26-28 AWG 2 WAY IDC CONNECTOR

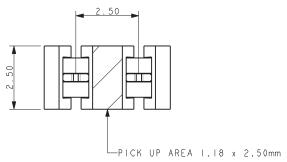



Code Wire Gauge		Α
001	28AWG	0.20
002	26AWG	0.28


5 00

PACKING DETAILS

2000


500MM

500MM




NC	T	Ε	S	3:	
	_	-			

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMPERATURE NYLON 46. COLOR REFER TO PAGE 3.
- 3. CONNECTOR DESIGNED TO ACCEPT 26 AND 28 GAUGE SOLID OR STRANDED WIRE.
- 4. ALL DIMENSIONS FOR REFERENCE UNLESS OTHERWISE STATED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-100, UL COMPONENTS REFER TO ELCO SPEC 201-01-100UL.
- 6. APPLICATION NOTES 201-01-124.
- 7. FOR UL PRODUCT CODES UL REFERENCE 390723 (US AND CANADA).
- 8. CONNECTOR OUTLINE.
- 9. ALL DIMENSIONS ±0.20 UNLESS TOLERANCE SPECIFIED.

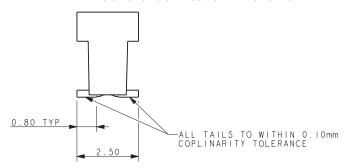


SMT PCB LAYOUT PURE TIN PADS

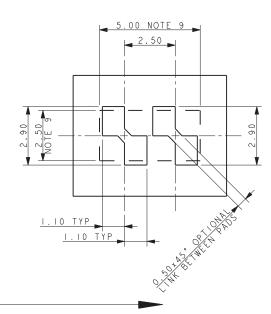


00	0 0	0 0	0 0	0 0	0 (0 0 0	0 0 0	0 0	O (
							\bigcirc	\bigcirc	
				4	8	.00 REF			




26-28 AWG 3 WAY IDC CONNECTOR





Code	Wire Gauge	Α
001	28AWG	0.20
002	26AWG	0.28

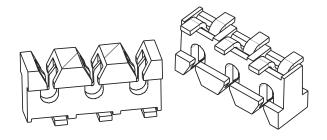


PACKING DETAILS

2000


500MM

500MM





NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMPERATURE NYLON 46. COLOR REFER TO PAGE 3.
- 3. CONNECTOR DESIGNED TO ACCEPT 26 AND 28 GAUGE SOLID OR STRANDED WIRE.
- 4. ALL DIMENSIONS FOR REFERENCE UNLESS OTHERWISE STATED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-100, UL COMPONENTS REFER TO ELCO SPEC 201-01-100UL.
- 6. APPLICATION NOTES 201-01-124.
- 7. FOR UL PRODUCT CODES UL REFERENCE 390723 (US AND CANADA).
- 8. CONNECTOR OUTLINE.
- 9. ALL DIMENSIONS ± 0.20 UNLESS TOLERANCE SPECIFIED.

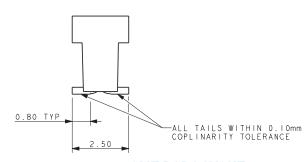


SMT PCB LAYOUT PURE TIN PADS

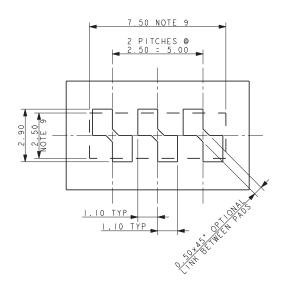

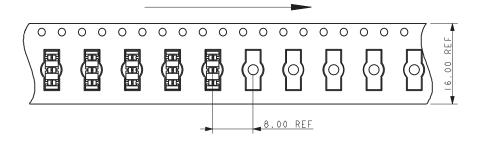



60-9175-00X-010-X00 ACCESSORY CAP - THROUGH WIRE

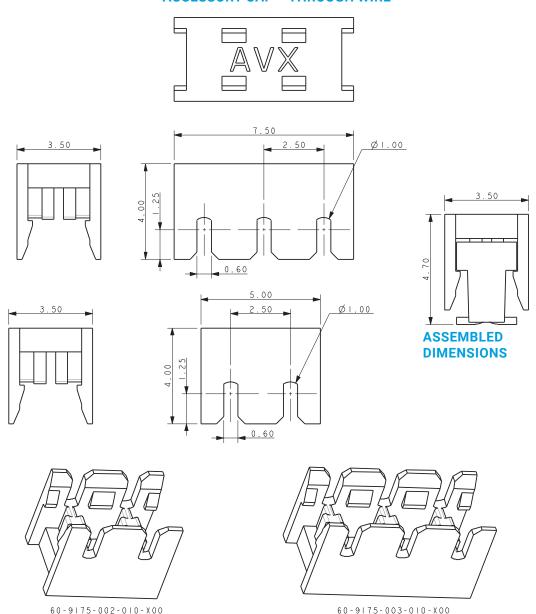


NOTES

- 1. CAP FOR IDC WIRE TO BOARD CONNECTION, 2 AND 3 WAY, THROUGH WIRE.
- 2. THROUGH WIRE CAP CAN BE USED AT ANY POSTION ALONG A WIRE.
- 3. FOR USE WITH STANDARD 9175 IDC CONNECTORS
- 4. CAP MATERIAL: GLASS FILLED NYLON 46, FOR COLORS SEE PAGE 3.
- 5. CAPS DESIGNED TO ACCOMMODATE WIRES WITH INSULATION UP TO 1.00MM DIAMETERS.
- 6. GENERAL TOLERANCE ±0.20.
- 7. PACKED IN BAGS, 1000 PIECES PER BAG.
- 8. ALL DIMENSIONS ±0.20 UNLESS TOLERANCE SPECIFIED.



60-9175-00X-0XX-010-X99 ACCESSORY CAP – WIRE STOP

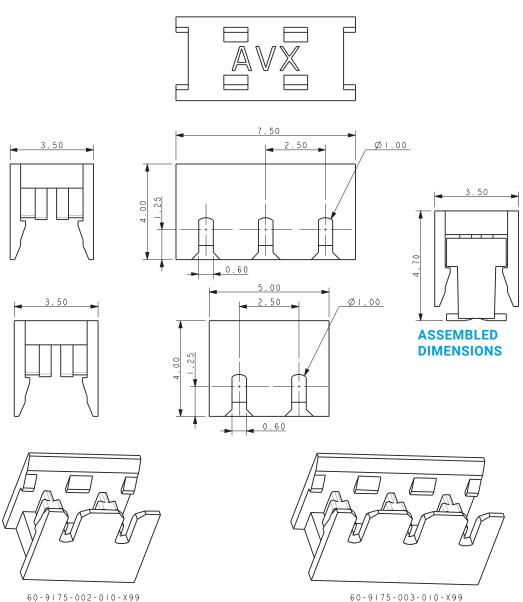

NOTES:


- 1. CAP FOR IDC WIRE TO BOARD CONNECTION, 2 AND 3 WAY, WIRE STOP.
- 2. WIRE STOP CAP FOR USE AT WIRE ENDS, STOP FACE PROTECTS THE WIRE ENDS.
- 3. FOR USE WITH STANDARD 9175 IDC CONNECTORS
- 4. CAP MATERIAL: GLASS FILLED NYLON 46, FOR COLORS SEE PAGE 3.
- 5. CAPS DESIGNED TO ACCOMMODATE WIRES WITH INSULATION UP TO 1.00MM DIAMETERS.
- 6. GENERAL TOLERANCE ±0.20.
- 7. PACKED IN BAGS, 1000 PIECES PER BAG.
- 8. ALL DIMENSIONS ±0.20 UNLESS TOLERANCE SPECIFIED.

STANDARD 26-28 AWG: 00-9175






HAND INSERTION TOOLING SINGLE WIRE INSERTION TOOL FOR 26/28 GAUGE WIRE

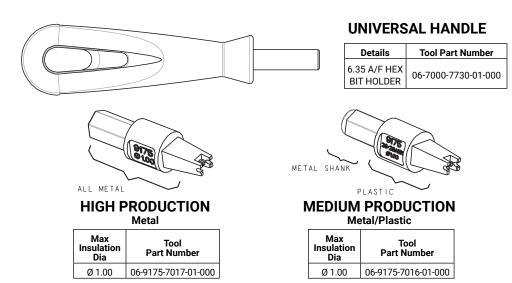

CLEARANCE AREA ON PCB FOR HAND TOOLING

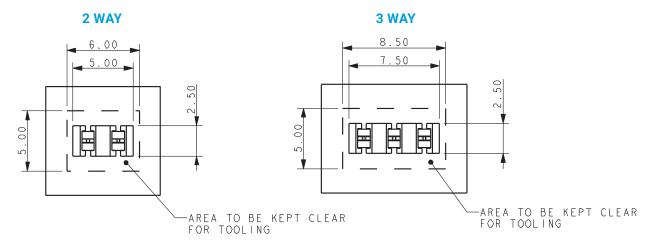

STANDARD 26-28 AWG: 00-9175






INSERTION TOOLING REQUIRES HAND PRESS WITH FLAT ROCK PLATES

2 WAY TOOL TOOL NUMBER 06-9175-7017-01-002 SKETCH SHOWS PCB RESTRICTED AREAS FOR ASSEMBLY TOOLING S

7.00 NOTE 3 5.00 NOTE 2

3 WAY TOOL JUMBER 06-9175-7017-01-003


TOOL NUMBER 06-9175-7017-01-003
SKETCH SHOWS PCB RESTRICTED AREAS FOR ASSEMBLY TOOLING

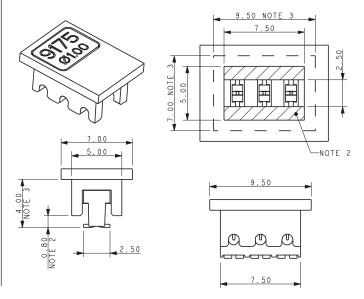

NOTES:

- 1. DIMENSIONS SHOWN ARE REFERENCE DIMENSIONS.
- 2. MAXIMUM COMPONENT HEIGHT 0.80MM IN THIS AREA.
- 3. MAXIMUM COMPONENT HEIGHT 4.00MM IN THIS AREA.
- 4. THE SAME RESTRICTIONS APPLY TO ALL WIRE INSULATION DIAMETERS.

ASSEMBLED CONNECTOR



ASSEMBLED HEIGHT

STANDARD CONNECTOR

CONNECTOR WITH CAP

NOTES:

- 1. ASSEMBLED HEIGHTS INCLUDE A 0.10MM ALLOWANCE FOR PAD AND SOLDER THICKNESS, NO ALLOWANCE HAS BEEN MADE FOR ANY SOLDER RESIST OR OTHER FEATURES.
- 2. WHEN THE WIRE IS ASSEMBLED THE INSULATION SHOULD BE TRAPPED BY THESE EDGES.

CAPPED IDC 26-28 AWG: 9175-700

General Information





The market and applications for simple and reliable discrete Wire-to-Board connectors continue to evolve. AVX first introduced the 9175 series of surface mountable Insulation Displacement Connectors (IDC) in 2006. Developed for harsh industrial and automotive applications, these connectors have been used in hundreds of applications from today's "Smart Meter" all the way down to a simple sensor termination to a PCB. Size and performance has been one of the key factors for selecting this connector in terminating 26-28AWG wires to a PCB.

The next generation of IDC connector moves beyond all of the technical and performance attributes to address the "User Friendliness" of the product. By changing the insulator from acting as a connector body and make it more like a contact carrier, the insulator becomes the wire location and insertion aid without any special tools. The wire is just inserted into the cap (no stripping required) and then pressed down to provide a secure "Gas Tight" termination. This configuration simplifies and cost reduces the entire wire termination process for connecting discrete wires to a PCB.

APPLICATIONS

- Connecting discrete wire components to a PCB
- · Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string
- · Reference Product Specification 201-01-140

FEATURES AND BENEFITS

- IDC contact provides a gas-tight connection to the PCB for long term reliability
- Plastic cap retains the contacts in position prior to automatic placement, then acts as the assembly tool to terminate the wires; no special tooling.
- Tested to automotive levels on shock, vibration and temperature cycling for reliability
- Identical contact and footprint pattern to the existing 9175 for full backward compatibility and functionality
- The IDC contact reduces the total applied cost versus solder or crimp processes
- Connectors are available in two configurations for maximum flexibility; End and Through Wire

ELECTRICAL

Current Rating: 1 Amps / Contact

Voltage Rating: 150 VAC


ENVIRONMENTAL


 Operating Temperature: -40°C to +125°C

MECHANICAL

- · Insulator Material: Nylon UL94VO
- · Contact Material: Phosphor Bronze
- Plating: Tin over Nickel

HOW TO ORDER






70X

Wire Gauge Size



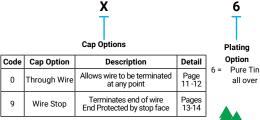





Certification: UL File #E90723

2 Position - Through Wire



26-28 AWG 2 WAY IDC CONNECTOR THROUGH WIRE CAPPED IDC

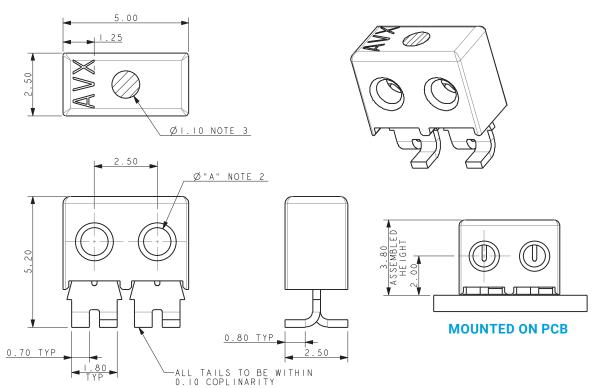




Code	Wire Gauge	Diameter A
701	28AWG	1.10
702	26AWG	1.30

NOTES:

- 1. 2 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED THROUGH WIRE CAP.
- 2. CONTACT/CAP TO MATCH 26AWG AND 28AWG WIRES. SOLID OR STRANDED CONDUCTOR. MAXIMUM INSULATOR 1.00 MM DIAMETER.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-139. UL COMPONENTS REFER TO ELCO SPEC 201-01-139UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1000.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 10.

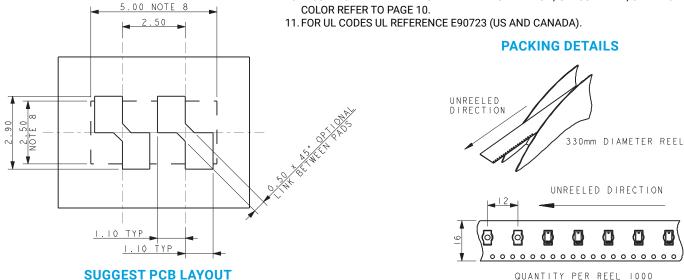



QUANTITY PER REEL 1000

3 Position - Through Wire




26-28 AWG 3 WAY IDC CONNECTOR THROUGH WIRE CAPPED IDC

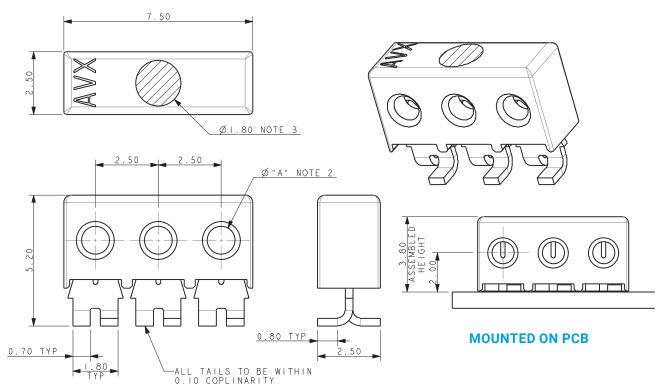



Code	Wire Gauge	Diameter A
701	28AWG	1.10
702	26AWG	1.30

- 1. WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED THROUGH WIRE CAP.
- 2. CONTACT/CAP TO MATCH 26AWG AND 28AWG WIRES. SOLID OR STRANDED CONDUCTOR. MAXIMUM INSULATOR 1.00 MM DIAMETER.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-139. UL COMPONENTS REFER TO ELCO SPEC 201-01-139UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1000.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 10.

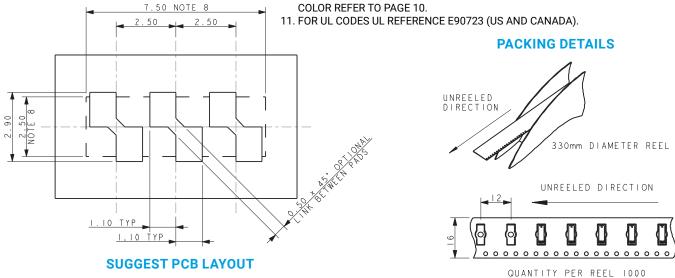



CAPPED IDC 26-28 AWG: 9175-700

2 Position - Wire Stop




26-28 AWG 2 WAY IDC CONNECTOR WIRE STOP CAPPED IDC

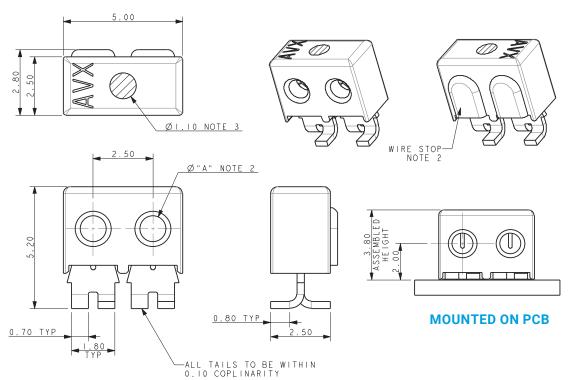



Code	Wire Gauge	Diameter A
701	28AWG	1.10
702	26AWG	1.30

- 1. 2 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED WIRE STOP CAP.
- 2. WIRE STOP CAP PROTECTS END OF WIRE.
- 3. CONTACT/CAP TO MATCH 26AWG AND 28AWG WIRES. SOLID OR STRANDED CONDUCTOR. MAXIMUM INSULATOR 1.00 MM DIAMETER.
- 4. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-139. UL COMPONENTS REFER TO ELCO SPEC 201-01-139UL.
- 6. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 7. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 8. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1000.
- 9. CONNECTOR OUTLINE.
- 10. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 11. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 10.

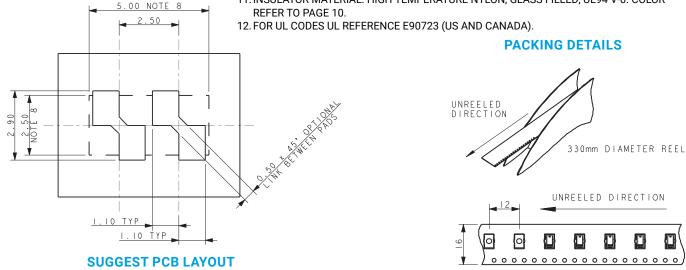


QUANTITY PER REEL 1000




3 Position - Wire Stop



26-28 AWG 3 WAY IDC CONNECTOR WIRE STOP CAPPED IDC

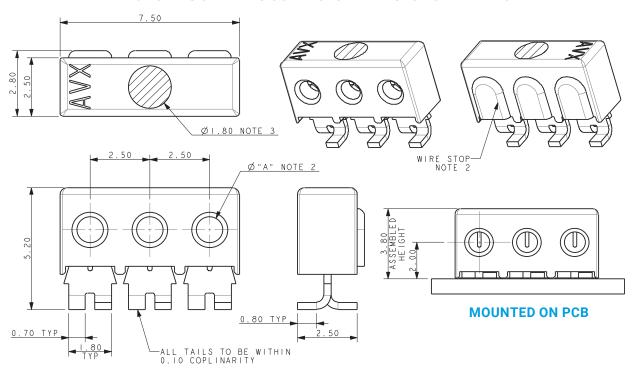




Code	Wire	Diameter
	Gauge	Α
701	28AWG	1.10
702	26AWG	1.30

NOTES:

- 3 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED WIRE STOP CAP.
- 2. WIRE STOP CAP PROTECTS END OF WIRE.
- CONTACT/CAP TO MATCH 26AWG AND 28AWG WIRES. SOLID OR STRANDED CONDUCTOR. MAXIMUM INSULATOR 1.00 MM DIAMETER.
- 4. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-139. UL COMPONENTS REFER TO ELCO SPEC 201-01-139UL.
- 6. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 7. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 8. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1000.
- 9. CONNECTOR OUTLINE.
- 10. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 11. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 10.
- 12. FOR UL CODES UL REFERENCE E90723 (US AND CANADA).

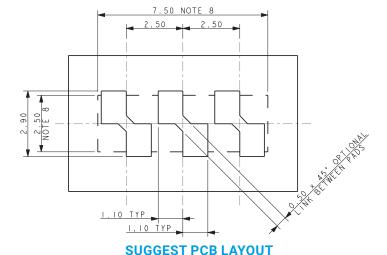


UNREELED DIRECTION 330mm DIAMETER REEL UNREELED DIRECTION




12




26-28 AWG ASSEMBLED CAPPED IDC CONNECTORS

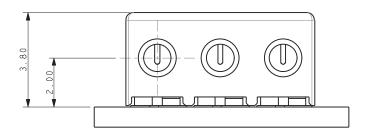

MOUNTED ON PCB

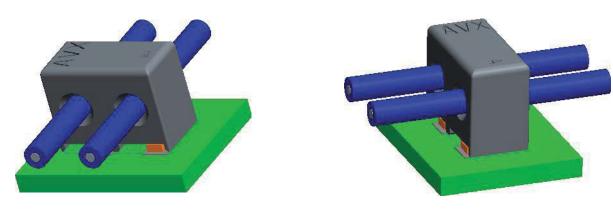


TYPICAL THROUGH WIRE ASSEMBLY

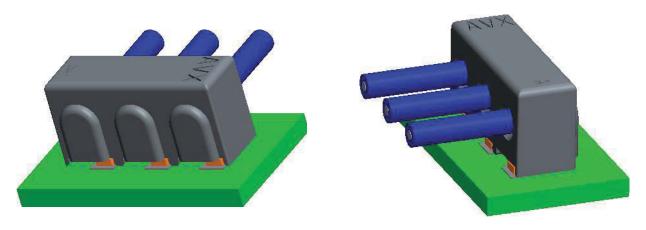

TYPICAL WIRE STOP ASSEMBLY

General Information



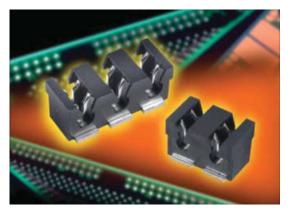

The 917X series of surface mount Insulation Displacement Connectors (IDC) were developed to meet the harsh automotive and industrial market applications for connecting individual wires directly to a PCB ranging from 14 AWG to 28 AWG. This industry proven contact system has been tested to automotive levels of shock, vibration, and temperature cycling to prove their reliability and robustness. The simplicity of inserting a wire into the connector with a small tool allows a wide range of devices to be connected to the PCB without soldering. In SSL applications specifically, these connectors are used to bring power and signal onto the PCB or are used to daisy chain multiple boards together in a long string. While the IDC contact provides a gas-tight connection to conductor of the wire, the housing has been designed to grab the insulation of the wire to provide a positive strain relief even in the harshest conditions. In case of repair, the wires can be removed and replace up to three times.

The 9176 series accepts 18 AWG to 24 AWG wires with an insulation diameter ranging from 1.1mm to 2.1mm. These dual contact connectors support a 10 amp current rating with two large SMT solder tails per wire to provide maximum stability on the PCB. Available in 1p-3p configuration, these connectors can be end stackable for higher pin counts. The 9176 series also comes with optional locking strain relief caps that act as the termination tool for severe vibration applications.

APPLICATIONS

- Connecting discrete wire components directly to the PCB
- · Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- · Application Notes: refer to 201-01-124

FEATURES AND BENEFITS

- IDC contact provides a gas-tight connection to the PCB for long term reliability
- · Connector housing captures the wire insulation for positive strain relief
- · Tested to automotive levels on shock, vibration and temperature cycling for reliability
- · Low and high volume assembly tools to match production volumes
- Reduced total applied cost versus solder or crimp processes
- · Optional thru and end caps lock in place to provide maximum strain relief
- High temperature insulator capable to 260°C reflow soldering processes

ELECTRICAL

Current Rating: 10 Amp / Contact

Voltage Rating: 300 VAC


ENVIRONMENTAL


 Operating Temperature: -40°C to +125°C

MECHANICAL

- Insulator Material: Nylon 46: UL94V0
- · Contact Material: Phosphor Bronze
- · Plating: Tin over Nickel
- Durability: 3 Cycles

HOW TO ORDER





Code	Accepted Wire Gauge	Wire Insulation	Cap Code Pages 21-22
001	18 Gauge Stranded	Ø 1.6-2.1	021
011	20 Gauge Solid or Stranded	Ø 1.6-2.1	021
022	22 Gauge Solid or Stranded	Ø 1.1-1.6	016
032	24 Gauge Solid or Stranded	Ø 1.1-1.6	016

Insulator Color
All Sizes
9 = UL White (Standard)
8 = UL Black (Special Order)

One Way Only (Special Order)
2 = UL Brown
3 = UL Blue
4 = UL Yellow
5 = UL Red
6 = UI. Green

7 = UL Orange

Plating
Option
Pure Tin



all over

Certification: UL File #E90723






CONNECTOR/TOOLING PART NUMBER MATRIX

	SERIES 9176 IDC			HAI	ND INSERTION TOOL	NG*	ACCESSO	RY CAPS	
AWG	Wire Insulation	Positions	Color	Part Number	Plastic (medium volume)	Metal (high volume)	Mass Termination	Though Wire	Wire Stop
18	Ø 1.6 - 2.1	1p	Black	009176001001806	069176701601000	069176701701000	N/A	609176001021000	609176001021099
18	Ø 1.6 - 2.1	1p	White	009176001001906	069176701601000	069176701701000	N/A	609176001021100	609176001021199
18	Ø 1.6 - 2.1	2p	Black	009176002001806	069176701601000	069176701701000	069176701701002	609176002021000	609176002021099
18	Ø 1.6 - 2.1	2p	White	009176002001906	069176701601000	069176701701000	069176701701002	609176002021100	609176002021199
18	Ø 1.6 - 2.1	3р	Black	009176003001806	069176701601000	069176701701000	069176701701003	609176003021000	609176003021099
18	Ø 1.6 - 2.1	3р	White	009176003001906	069176701601000	069176701701000	069176701701003	609176003021100	609176003021199
20	Ø 1.6 - 2.1	1p	Black	009176001011806	069176701601000	069176701701000	N/A	609176001021000	609176001021099
20	Ø 1.6 - 2.1	1p	White	009176001011906	069176701601000	069176701701000	N/A	609176001021100	609176001021199
20	Ø 1.6 - 2.1	2p	Black	009176002011806	069176701601000	069176701701000	069176701701002	609176002021000	609176002021099
20	Ø 1.6 - 2.1	2p	White	009176002011906	069176701601000	069176701701000	069176701701002	609176002021100	609176002021199
20	Ø 1.6 - 2.1	3р	Black	009176003011806	069176701601000	069176701701000	069176701701003	609176003021000	609176003021099
20	Ø 1.6 - 2.1	3р	White	009176003011906	069176701601000	069176701701000	069176701701003	609176003021100	609176003021199
22	Ø 1.1 - 1.6	1p	Black	009176001022806	069176701602000	069176701702000	N/A	609176001016000	609176001016099
22	Ø 1.1 - 1.6	1p	White	009176001022906	069176701602000	069176701702000	N/A	609176001016100	609176001016199
22	Ø 1.1 - 1.6	2p	Black	009176002022806	069176701602000	069176701702000	069176701702002	609176002016000	609176002016099
22	Ø 1.1 - 1.6	2p	White	009176002022906	069176701602000	069176701702000	069176701702002	609176002016100	609176002016199
22	Ø 1.1 - 1.6	3р	Black	009176003022806	069176701602000	069176701702000	069176701702003	609176003016000	609176003016099
22	Ø 1.1 - 1.6	3р	White	009176003022906	069176701602000	069176701702000	069176701702003	609176003016100	609176003016199
24	Ø 1.1 - 1.6	1p	White	009176001032106	069176701602000	069176701702000	N/A	609176001016100	609176001016199
24	Ø 1.1 - 1.6	1p	Black	009176001032806	069176701602000	069176701702000	N/A	609176001016000	609176001016099
24	Ø 1.1 - 1.6	1p	White	009176001032906	069176701602000	069176701702000	N/A	609176001016100	609176001016199
24	Ø 1.1 - 1.6	2p	Black	009176002032806	069176701602000	069176701702000	069176701702002	609176002016000	609176002016099
24	Ø 1.1 - 1.6	2p	White	009176002032906	069176701602000	069176701702000	069176701702002	609176002016100	609176002016199
24	Ø 1.1 - 1.6	3р	Black	009176003032806	069176701602000	069176701702000	069176701702003	609176003016000	609176003016099
24	Ø 1.1 - 1.6	3p	White	009176003032906	069176701602000	069176701702000	069176701702003	609176003016100	609176003016199
	* Hand Insertion Tooling - Universal Hand Tool 067000773001000; Consult Application Notes 201-01-124								





18-24 AWG 1 WAY IDC CONNECTOR

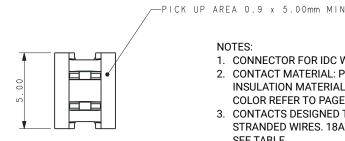

NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMPERATURE NYLON 46. COLOR REFER TO PAGE 16.
- 3. CONTACTS DESIGNED TO ACCEPT BETWEEN 20AWG AND 24AWG SOLID AND STRANDED WIRES. 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 4. ALL DIMENSIONS FOR REFERENCE UNLESS OTHERWISE STATED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-106. UL COMPONENTS REFER TO ELECO SPEC 201-01-106U.
- 6. APPLICATION NOTES 201-01-124.
- 7. FOR PCB SPACE RESTRICTED BY WIRE ASSEMBLY TOOLING REFER TO PAGE 23.
- 8. FOR HAND WIRE ASSEMBLY TOOLING REFER TO PAGE 23.
- 9. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).
- 10. ALL DIMENSIONS ±0.20 TOLERANCE SPECIFIED.

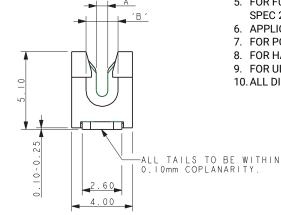









Code	Accepted Wire Gauge	A	Wire Insulation	В
001	18AWG Stranded	0.72	Ø1.6-2.1	2.1
011	20AWG Solid and Stranded	0.60	Ø1.6-2.1	2.1
022	22AWG Solid and Stranded	0.47	Ø 1.1-1.6	1.6
032	24AWG Solid and Stranded	0.37	Ø 1.1-1.6	1.6
	CMT DCR	IAV	niii	

PURE TIN PADS

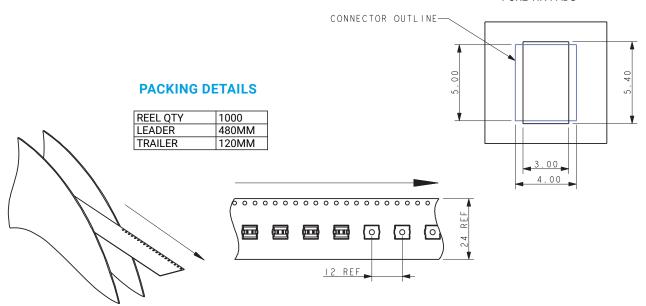





18-24 AWG 2 WAY IDC CONNECTOR PICK UP AREA 1.9 x 5.00mm MIN





NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMPERATURE NYLON 46. COLOR REFER TO PAGE 16.
- CONTACTS DESIGNED TO ACCEPT BETWEEN 20AWG AND 24AWG SOLID AND STRANDED WIRES. 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 4. ALL DIMENSIONS FOR REFERENCE UNLESS OTHERWISE STATED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-106. UL COMPONENTS REFER TO ELECO SPEC 201-01-106U.
- 6. APPLICATION NOTES 201-01-124.
- 7. FOR PCB SPACE RESTRICTED BY WIRE ASSEMBLY TOOLING REFER TO PAGE 23.
- 8. FOR HAND WIRE ASSEMBLY TOOLING REFER TO PAGE 23.
- 9. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).
- 10. ALL DIMENSIONS ±0.20 TOLERANCE SPECIFIED.

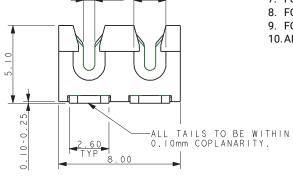









Code	Accepted Wire Gauge	A	Wire Insulation	В
001	18AWG Stranded	0.72	Ø 1.6-2.1	2.1
011	20AWG Solid and Stranded	0.60	Ø 1.6-2.1	2.1
022	022 22AWG Solid and Stranded (Ø 1.1-1.6	1.6
032	24AWG Solid and Stranded	0.37	Ø <u>1.</u> 1-1.6	1.6
	CMT DCB	1 AV	TIT T	

PURE TIN PADS

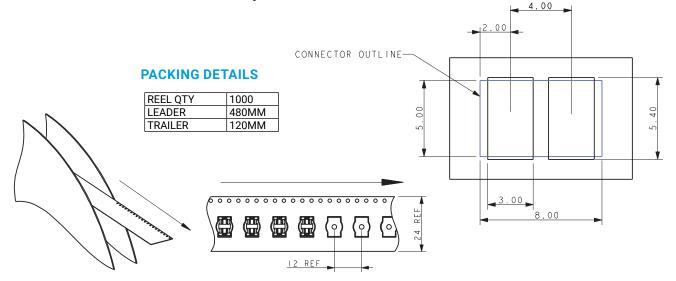





18-24 AWG 3 WAY IDC CONNECTOR

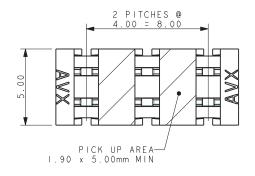


NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMPERATURE NYLON 46. COLOR REFER TO PAGE 16.
- CONTACTS DESIGNED TO ACCEPT BETWEEN 20AWG AND 24AWG SOLID AND STRANDED WIRES. 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 4. ALL DIMENSIONS FOR REFERENCE UNLESS OTHERWISE STATED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-106. UL COMPONENTS REFER TO ELECO SPEC 201-01-106U.
- 6. APPLICATION NOTES 201-01-124.
- 7. FOR PCB SPACE RESTRICTED BY WIRE ASSEMBLY TOOLING REFER TO PAGE 23.
- 8. FOR HAND WIRE ASSEMBLY TOOLING REFER TO PAGE 23.
- 9. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).
- 10. ALL DIMENSIONS ±0.20 TOLERANCE SPECIFIED.

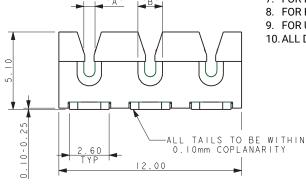




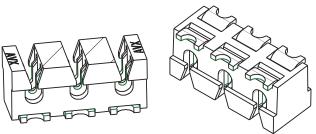


Code	Accepted Wire Gauge	Α	Wire Insulation	В
001	18AWG Stranded	0.72	Ø1.6-2.1	2.1
011	20AWG Solid and Stranded	0.60	Ø1.6-2.1	2.1
022	22AWG Solid and Stranded	0.47	Ø1.1-1.6	1.6
032	24AWG Solid and Stranded	0.37	Ø1.1-1.6	1.6

SMT PCB LAYOUT

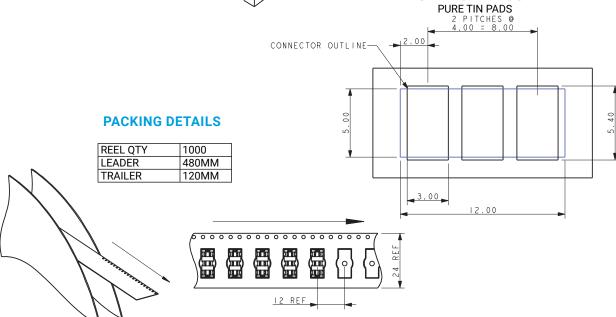




60-9176-00X-0XX-X00 ACCESSORY CAP – THROUGH WIRE

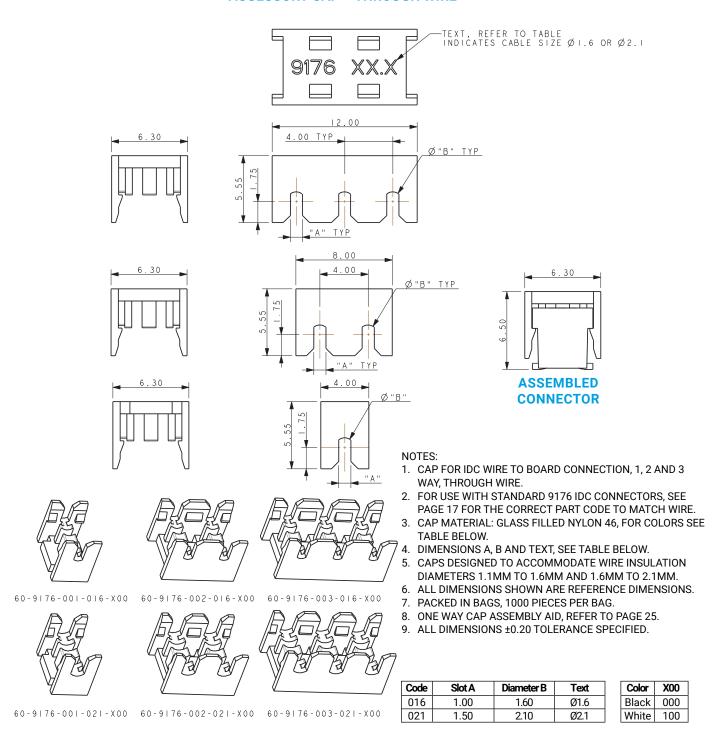



60-9176-00X-0XX-X99 **ACCESSORY CAP - WIRE STOP**

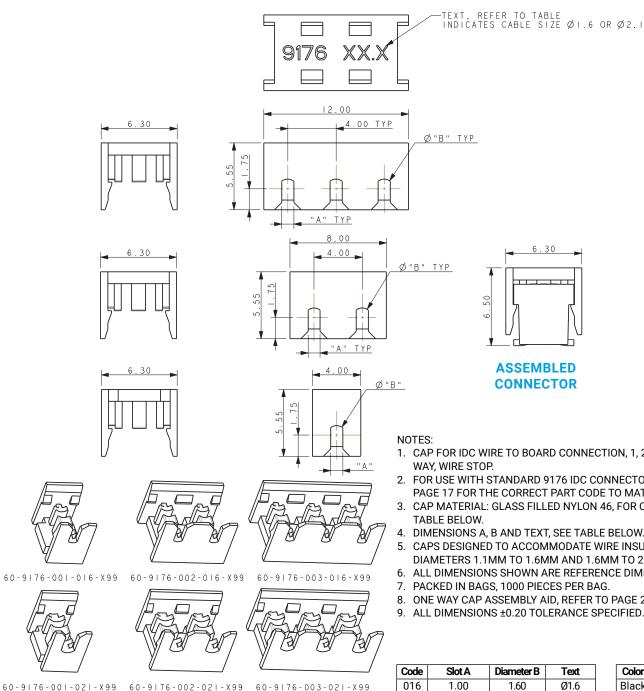

9176 XX.X
12.00 4.00 TYP Ø"B" TYP
8.00 4.00 Ø"B" TYP
ASSEMBLED CONNECTOR NOTES: 1. CAP FOR IDC WIRE TO BOARD CONNECTION, 1, 2 AND 3 WAY, WIRE STOP. 2. FOR USE WITH STANDARD 9176 IDC CONNECTORS, SEE

- WITH STANDARD 9176 IDC CONNECTORS, SEE PAGE 17 FOR THE CORRECT PART CODE TO MATCH WIRE.
- 3. CAP MATERIAL: GLASS FILLED NYLON 46, FOR COLORS SEE
- 4. DIMENSIONS A, B AND TEXT, SEE TABLE BELOW.
- 5. CAPS DESIGNED TO ACCOMMODATE WIRE INSULATION DIAMETERS 1.1MM TO 1.6MM AND 1.6MM TO 2.1MM.
- 6. ALL DIMENSIONS SHOWN ARE REFERENCE DIMENSIONS.
- 7. PACKED IN BAGS, 1000 PIECES PER BAG.
- 8. ONE WAY CAP ASSEMBLY AID, REFER TO PAGE 25.
- 9. ALL DIMENSIONS ±0.20 TOLERANCE SPECIFIED.


Code	Slot A	Diameter B	Text
016	1.00	1.60	Ø1.6
021	1.50	2.10	Ø2.1

Color	X00
Black	000
White	100

Hand Insertion Tooling for Single 18/24 Gauge Wire




HAND INSERTION TOOLING FOR SINGLE 18/24 GAUGE WIRE



UNIVERSAL HANDLE

Details	Tool Part Number
6.35 A/F HEX BIT HOLDER	06 7000 7730 01 000



HIGH PRODUCTION


Max Insulation Dia	Tool Part Number
Ø2.10	06 9176 7017 01 000
Ø1.60	06 9176 7017 02 000



MEDIUM PRODUCTION Metal/Plastic

Max Insulation Dia	Tool Part Number
Ø2.10	06 9176 7016 01 000
Ø1.60	06 9176 7016 02 000

CLEARANCE AREA ON PCB FOR HAND TOOLING

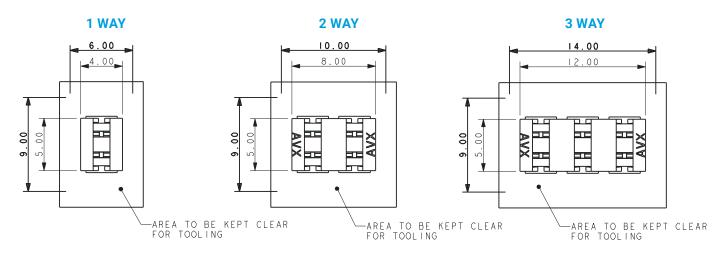



Insertion Tooling Requires Hand Press with Flat Rock Plates



INSERTION TOOLING REQUIRES HAND PRESS WITH FLAT ROCK PLATES

2 WAY 3 WAY






HIGH PRODUCTION


Metal


No. of Ways	Max Insulation Dia	Tool Part Number
2	Ø2.10	06 9176 7017 01 002
2	Ø1.60	06 9176 7017 02 002
3	Ø2.10	06 9176 7017 01 003
3	Ø1.60	06 9176 7017 02 003

PCB RESTRICTED AREAS FOR PRESS ASSEMBLY TOOLING


2 WAY

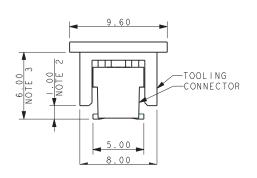





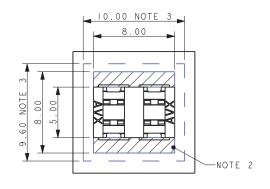

3 WAY

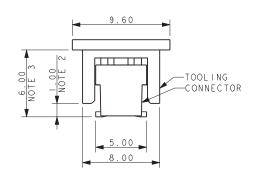



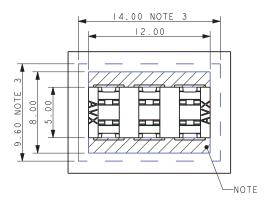


NOTES:

- 1. DIMENSIONS SHOWN ARE REFERENCE DIMENSIONS.
- 2. MAXIMUM COMPONENT HEIGHT 1.00MM IN THIS AREA.
- 3. MAXIMUM COMPONENT HEIGHT 6.00MM IN THIS AREA.
- 4. THE SAME RESTRICTIONS APPLY TO ALL WIRE INSULATION DIAMETERS.
- 5. 2 AND 3 WAY TOOLS ONLY, FOR USE UNDER HAND PRESS WITH FLAT PLATES.
- 6. FOR HAND TOOLING REFER TO PAGE 23.
- 7. ALL DIMENSIONS ±0.20 UNLESS TOLERANCE SPECIFIED.

Hand Insertion Tooling for One Way Cap Insertion / Clearance Area on PCB for Hand Tooling




HAND INSERTION TOOLING FOR ONE WAY CAP INSERTION

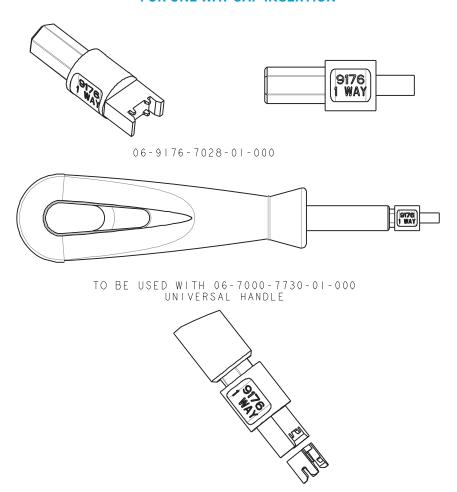


FOR ASSEMBLY INSTRUCTION REFER TO 201-01-124 APPLICATION NOTES


CLEARANCE AREA ON PCB FOR HAND TOOLING

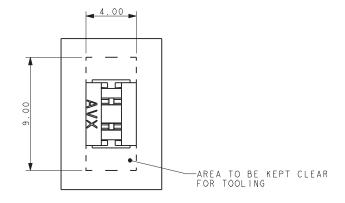




ASSEMBLED CONNECTOR



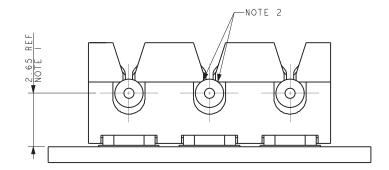

ASSEMBLED CONNECTOR

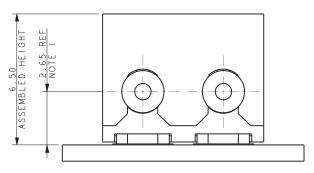

CONNECTOR WITH CAP

NOTES:

- 1. ASSEMBLED HEIGHTS INCLUDE 0.10MM ALLOWANCE FOR PAD AND SOLDER THICKNESS. NO ALLOWANCE HAS BEEN MADE FOR ANY SOLDER RESIST OR OTHER FEATURES.
- 2. WHEN THE WIRE IS ASSEMBLED THE INSULTATION SHOULD BE TRAPPED BY THESE EDGES.

CAPPED 18-24 AWG: 9176-700

General Information





The market and applications for simple and reliable discrete Wire-to-Board connectors continue to evolve. AVX first introduced the 9176 series of surface mountable Insulation Displacement Connectors (IDC) in 2007. Developed for harsh industrial and automotive applications, these connectors have been used in hundreds of applications from today's "Smart Meter" all the way down to a simple sensor termination to a PCB. Size and performance has been one of the key factors for selecting this connector in terminating 18-24AWG wires to a PCB.

The next generation of IDC connector moves beyond all of the technical and performance attributes to address the "User Friendliness" of the product. By changing the insulator from acting as a connector body and make it more like a contact carrier, the insulator becomes the wire location and insertion aid without any special tools. The wire is just inserted into the cap (no stripping required) and then pressed down to provide a secure "Gas Tight" termination. This configuration simplifies and cost reduces the entire wire termination process for connecting discrete wires to a PCB.

APPLICATIONS

- · Connecting discrete wire components to a PCB
- Bringing power and signals onto a PCB
- · Daisy chaining PCB's together to create a continuous
- Reference Product Specification 201-01-140

FEATURES AND BENEFITS

- IDC contact provides a gas-tight connection to the PCB for long term reliability
- Plastic cap retains the contacts in position prior to automatic placement, then acts as the assembly tool to terminate the wires; no special tooling.
- Tested to automotive levels on shock, vibration and temperature cycling for reliability
- Identical contact and footprint pattern to the existing 9176 for full backward compatibility and functionality
- The IDC contact reduces the total applied cost versus solder or crimp processes
- Connectors are available in two configurations for maximum flexibility; End and Through Wire

ELECTRICAL

Current Rating: 10 Amps / Contact

Voltage Rating: 300 VAC


ENVIRONMENTAL


· Operating Temperature: -40°C to +125°C

MECHANICAL


- Insulator Material: Nylon UL94VO
- Contact Material: Phosphor Bronze
- Plating: Tin over Nickel

HOW TO ORDER






7XX






X










Certification: UL File #E90723




1 Position - Through Wire





18 - 24 AWG 1 WAY IDC CONNECTOR THROUGH WIRE CAPPED IDC













NOTES:

- 1. 1 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED THROUGH WIRE CAP, CODE REFER TO PAGE 27.
- 2. CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-138, UL COMPONENTS REFER TO ELCO SPEC 201-01-138UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 600.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 27.
- 11. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 12. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).

Code Accepted Wire В Wire Gauge Insulation 701 18 AWG Stranded 0.74 2.1 Ø1.6-2.1 20 AWG Solid and Stranded 711 0.60 Ø1.6-2.1 2.1 22 AWG Solid and Stranded 0.47 Ø 1.1-1.6 1.6 732 24 AWG Solid and Stranded 0.37 Ø 1.1-1.6 1.6





SUGGEST PCB LAYOUT

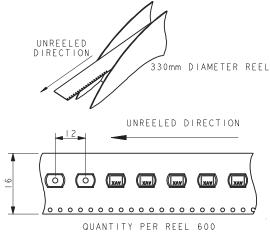



18 - 24 AWG 2 WAY IDC CONNECTOR THROUGH WIRE CAPPED IDC

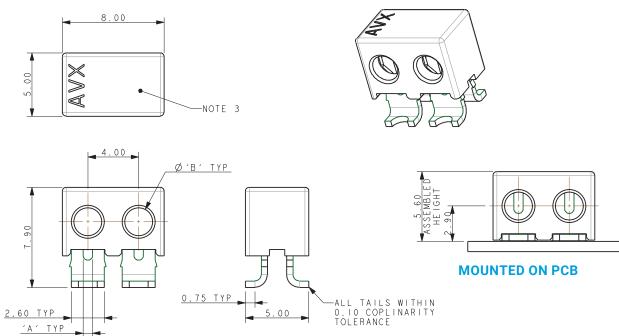




Code	Accepted	Α	Wire	В
	Wire Gauge		Insulation	
701	18 AWG Stranded	0.74	Ø1.6-2.1	2.1
711	20 AWG Solid and Stranded	0.60	Ø1.6-2.1	2.1
722	22 AWG Solid and Stranded	0.47	Ø 1.1-1.6	1.6
732	24 AWG Solid and Stranded	0.37	Ø 1.1-1.6	1.6


NOTES:


- 2 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED THROUGH WIRE CAP, CODE REFER TO PAGE 27.
- 2. CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-138, UL COMPONENTS REFER TO ELCO SPEC 201-01-138UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 600.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 27.
- 11. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 12. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).

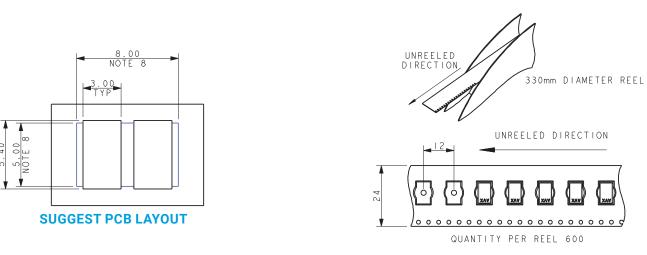



18 - 24 AWG 3 WAY IDC CONNECTOR THROUGH WIRE CAPPED IDC

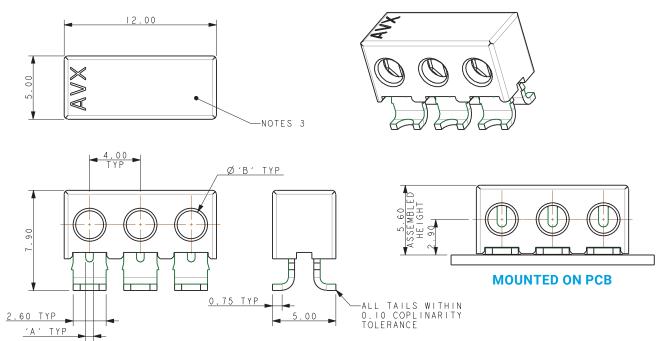




Code	Accepted	Α	Wire	В
	Wire Gauge		Insulation	
701	18 AWG Stranded	0.74	Ø1.6-2.1	2.1
711	20 AWG Solid and Stranded	0.60	Ø1.6-2.1	2.1
722	22 AWG Solid and Stranded	0.47	Ø 1.1-1.6	1.6
732	24 AWG Solid and Stranded	0.37	Ø 1.1-1.6	1.6




NOTES:

- 1. 3 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED THROUGH WIRE CAP, CODE REFER TO PAGE 27.
- 2. CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-138, UL COMPONENTS REFER TO ELCO SPEC 201-01-138UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 600.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 27.
- 11. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 12. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).

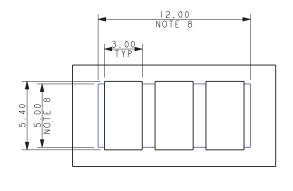




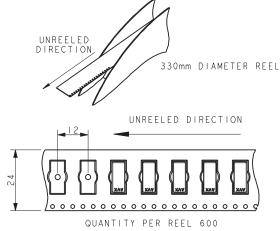





18 - 24 AWG 1 WAY IDC CONNECTOR WIRE STOP CAPPED IDC

















- 1. 1 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED WIRE STOP CAP, CODE REFER TO PAGE 27.
- 2. CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-138, UL COMPONENTS REFER TO ELCO SPEC 201-01-138UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 600.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 27.
- 11. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 12. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).

Code Accepted Wire Α В Wire Gauge Insulation 701 18 AWG Stranded 0.74 Ø1.6-2.1 2.1 711 20 AWG Solid and Stranded 0.60 Ø1.6-2.1 2.1 22 AWG Solid and Stranded 0.47 Ø 1.1-1.6 1.6 732 24 AWG Solid and Stranded 0.37 Ø 1.1-1.6


SUGGEST PCB LAYOUT

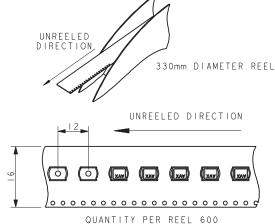






18 - 24 AWG 2 WAY IDC CONNECTOR WIRE STOP CAPPED IDC

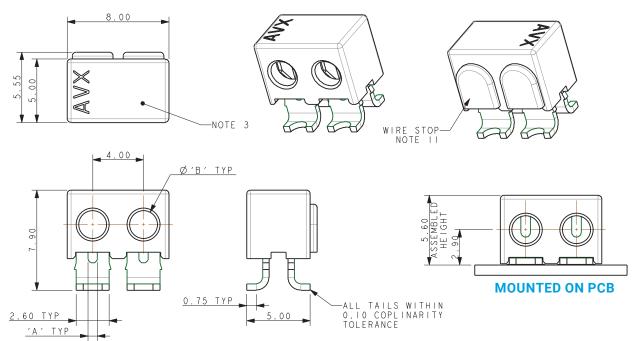




Code	Accepted	Α	Wire	В
	Wire Gauge		Insulation	
701	18 AWG Stranded	0.74	Ø1.6-2.1	2.1
711	20 AWG Solid and Stranded	0.60	Ø1.6-2.1	2.1
722	22 AWG Solid and Stranded	0.47	Ø 1.1-1.6	1.6
732	24 AWG Solid and Stranded	0.37	Ø 1.1-1.6	1.6


NOTES:


- 1. 2 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED WIRE STOP CAP, CODE REFER TO PAGE 27.
- 2. CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-138, UL COMPONENTS REFER TO ELCO SPEC 201-01-138UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 600.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 27.
- 11. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 12. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).

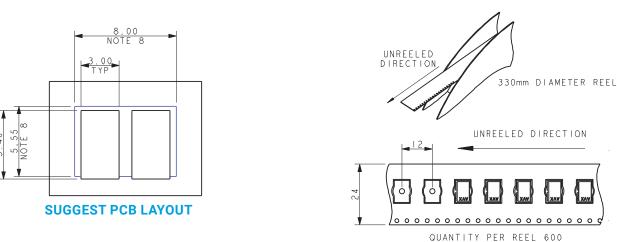




18 - 24 AWG 3 WAY IDC CONNECTOR WIRE STOP CAPPED IDC

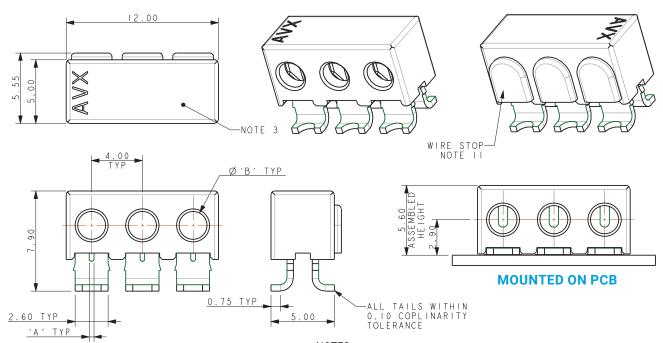



Code	Accepted	Α	Wire	В
	Wire Gauge		Insulation	
701	18 AWG Stranded	0.74	Ø1.6-2.1	2.1
711	20 AWG Solid and Stranded	0.60	Ø1.6-2.1	2.1
722	22 AWG Solid and Stranded	0.47	Ø 1.1-1.6	1.6
732	24 AWG Solid and Stranded	0.37	Ø 1.1-1.6	1.6




NOTES:

- 1. 3 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION. PRE-ASSEMBLED WIRE STOP CAP, CODE REFER TO PAGE 27.
- 2. CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-138, UL COMPONENTS REFER TO ELCO SPEC 201-01-138UL.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-140.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 600.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0. COLOR REFER TO PAGE 27.
- 11. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 12. FOR UL PRODUCT CODES UL REFERENCE E90723 (US AND CANADA).


12.00 NOTE 8

SUGGEST PCB LAYOUT

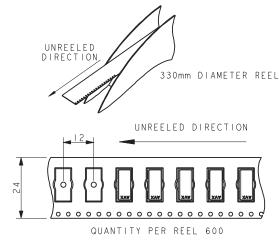




18-24 AWG ASSEMBLED CAPPED IDC CONNECTORS

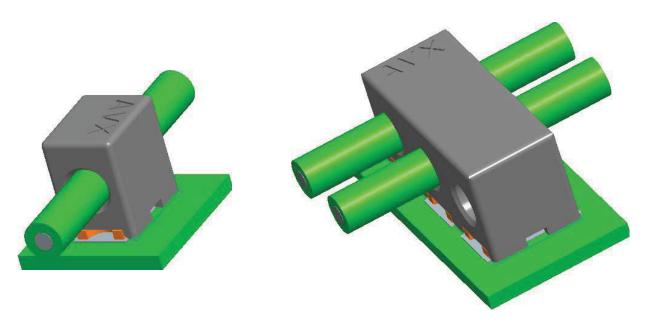

TYPICAL THROUGH WIRE ASSEMBLY

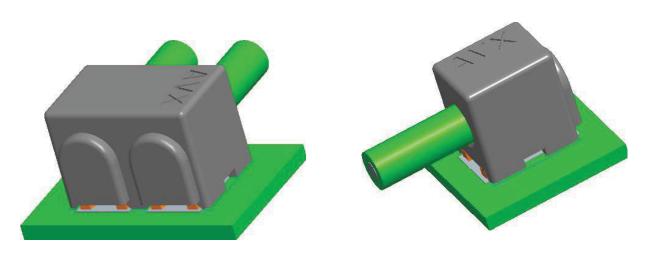

TYPICAL WIRE STOP ASSEMBLY

General Information





The 917X series of surface mount Insulation Displacement Connectors (IDC) were developed to meet the harsh automotive and industrial market applications for connecting individual wires directly to a PCB ranging from 14 AWG to 28 AWG. This industry proven contact system has been tested to automotive levels of shock, vibration, and temperature cycling to prove their reliability and robustness. This new single contact was developed as a standalone component to enhance the application uses with the IDC technology. The simplicity of inserting a wire into an SMT contact with a small tool or optional retention / termination cap allows a wide range of devices to be connected to the PCB without soldering. In SSL applications specifically, these contacts are used to bring power and signal onto the PCB or are used to daisy chain multiple boards together in a long string. While the IDC contact provides a gas-tight connection to conductor of the wire, the optional cap provides a positive strain relief even in the harshest conditions. In case of repair, the wires can be removed and replace up to three times.

The single 9176-400 series contact and cap accepts 22 AWG to 28 AWG wires with an insulation diameter ranging from 1.0mm to 1.5mm. These dual beam contacts support a 6 amp current rating with a large SMT solder base to provide maximum stability on the PCB. The optional locking strain relief cap acts as the termination tool for severe vibration applications.

APPLICATIONS

- Connecting discrete wire components directly to the PCB
- · Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- · Application notes: refer to 201-01-124

FEATURES AND BENEFITS

- IDC contact is supplied in T&R pockets for standard SMT placement
- · IDC contact provides a gas-tight connection to the PCB for long term reliability
- Optional termination cap provides additional strain relief for severe environments
- · Tested to automotive levels on shock, vibration and temperature cycling for reliability
- · Reduced total applied cost versus solder or crimp processes
- · Individual contacts can be located anywhere on the PCB based on specific application

ELECTRICAL

- · Current Rating: 6 Amps/Contact
- Voltage Rating: Dependent on component proximity


ENVIRONMENTAL


 Operating Temperature: -40°C to +125°C

MECHANICAL

- · Insulator Material: Nylon 46: UL94V0
- · Contact Material: Phosphor Bronze
- Plating: Tin over Nickel
- Durability: 3 Cycles

HOW TO ORDER - CONTACT OPTIONS

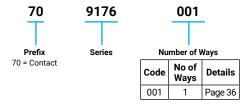




4XX



HOW TO ORDER - CAP OPTIONS

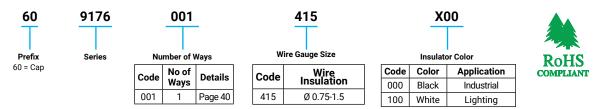

CONNECTOR/TOOLING PART NUMBER MATRIX

	SERIES 9176-400 IDC			HAND INSERTION TOOLING*			ACCESSORY CAPS	
AWG	Wire Insulation	Positions	Part Number	Plastic (medium volume)	Metal (high volume)	Cap Application Tool	White	Black
22	Ø 1.0 - 1.5	1p	709176001422006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
24	Ø 1.0 - 1.5	1p	709176001432006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
26	Ø 0.7 - 1.0	1p	709176001442006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
28	Ø 0.7 - 1.0	1p	709176001443006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
	* Hand Insertion Tooling and Cap Application - Universal Hand Tool 067000773001000: Consult Application Notes 201-01-124							


Certification: UL File #E90723





Contact Details




CONTACT DETAILS








Code	Code Accepted		
	Wire Gauge		
422	22AWG Solid or Stranded	0.47	
432	24AWG Solid or Stranded	0.37	
442	26AWG Solid or Stranded	0.28	
443	28AWG Solid or Stranded	0.20	



- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3. CONTACT PLATING: PURE TIN.
- 4. CONNECTOR DESIGNED TO ACCEPT BETWEEN 22AWG AND 28AWG SOLID AND STRANDED WIRE, SEE TABLE.
- 5. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED.
- 6. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPEC 201-01-126 AND APPLICATION NOTES 201-01-124.
- 7. SMT PCB LAYOUT, REFER TO PAGE 37.
- 8. PACKING IN TAPE AND REEL, QUANTITY 2000 PER REEL.
- 9. WHEN REQUIRED, MATCHING CAP DETAILS ON DRAWING 60-9176-001-4XX-X06S.
- 10. ASSEMBLY TOOLING ON PAGE 39 FOR WIRE INTO CONTACT AND PAGE 38 FOR CAP.
- 11. UL REFERENCE E90723, THIS UL REFERENCE ALSO APPLIES WHEN COMBINED WITH AVX SPECIFIED OPTIONAL CAP.

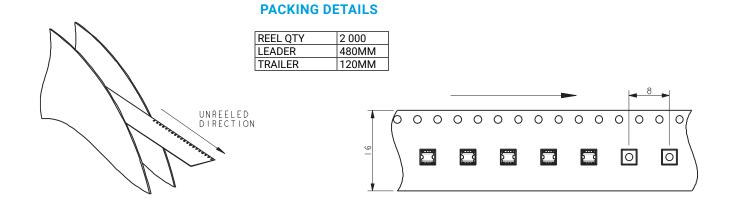





22-28 AWG IDC WIRE TO BOARD CONNECTOR SINGLE CONTACT

SMT PCB LAYOUT


PURE TIN PADS

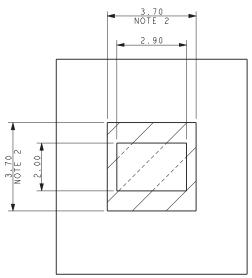



ORIENTATION OF CONTACT ON PAD


ASSEMBLED/INSTALLED PRODUCTS

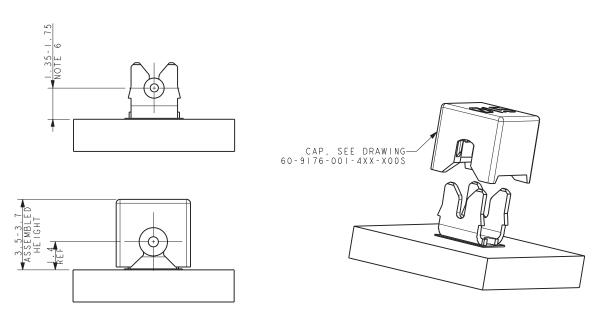

- 1. CONNECTOR CAN BE USED WITH CONTACT ONLY OR WITH OPTIONAL CAP.
- 2. OUTLINE OF CAP WHERE USED.
- 3. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPEC 201-01-126 AND APPLICATION NOTES 201-01-124.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED.
- 5. ASSEMBLY TOOLING ON PAGE 39 FOR WIRE INTO CONTACT AND PAGE 38 FOR CAP.
- 6. WIRE CENTER LINE HEIGHT ABOVE THE PCB. THIS INCLUDES AN ALLOWANCE OF 0.10MM FOR SOLDER AND 0.035MM FOR PAD THICKNESS. NO ALLOWANCE HAS BEEN MADE FOR SOLDER RESIST OR OTHER FEATURES.



ASSEMBLY TOOLING - CAP USED

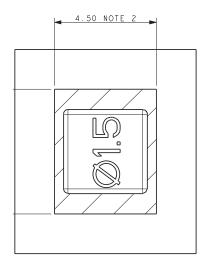



NOTES:


- 1. ASSEMBLY TOOLING FOR CAP.
- 2. MINIMUM AREA OF PCB TO BE KEPT CLEAR OF COMPONENTS, TRACKS PERMISSIBLE.
- 3. WIRE AND CAP INSERTED IN ONE OPERATION.
- 4. REFER TO APPLICATION NOTE 201-01-124 FOR FURTHER INFORMATION.
- 5. REFER TO PAGE 39 FOR ASSEMBLY WITHOUT CAP.

CAP APPLICATION TOOL - PLASTIC

06-9176-7023-01-000




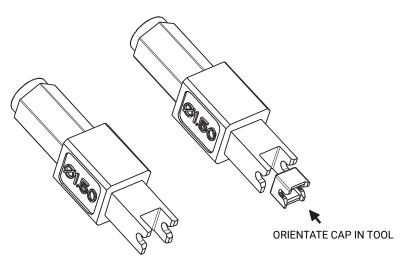



UNIVERSAL HANDLE

06-7000-7730-01-000




CONNECTOR/TOOLING PART NUMBER MATRIX


	SERIES 9176-400 IDC			HAND INSERTION TOOLING*		ACCESSORY CAPS		
AWG	Wire Insulation	Positions	Part Number	Plastic (medium volume)	Metal (high volume)	Cap Application Tool	White	Black
22	Ø 1.0 - 1.5	1p	709176001422006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
24	Ø 1.0 - 1.5	1p	709176001432006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
26	Ø 0.7 - 1.0	1p	709176001442006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
28	Ø 0.7 - 1.0	1p	709176001443006	069176702201000	069176702101000	069176702301000	609176001415100	609176001415000
	* Hand Insertion Tooling and Cap Application - Universal Hand Tool 067000773001000; Consult Application Notes 201-01-124							



ASSEMBLY TOOLING – CAP NOT USED WIRE ONTO CONTACT

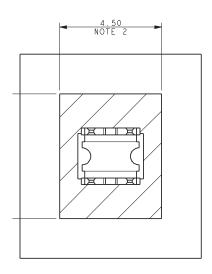


METAL TOOL HIGH VOLUME 06-9176-7021-01-000




PLASTIC TOOL LOW/MEDIUM VOLUME

06-9176-7022-01-000



UNIVERSAL HANDLE


06-7000-7730-01-000





- 1. ASSEMBLY TOOLING FOR CONTACT ONLY. NO CAP USED.
- $2. \ \ \mathsf{MINIMUM} \ \mathsf{AREA} \ \mathsf{OF} \ \mathsf{PCB} \ \mathsf{TO} \ \mathsf{BE} \ \mathsf{KEPT} \ \mathsf{CLEAR} \ \mathsf{OF} \ \mathsf{COMPONENTS}, \mathsf{TRACKS} \ \mathsf{PERMISSIBLE}.$
- 3. REFER TO APPLICATION NOTE 201-01-124 FOR FURTHER INFORMATION.
- 4. INSERT CORRECT TOOL INTO HANDLE, MAGNETIC RETENTION.
- 5. REFER TO PAGE 38 FOR ASSEMBLY WITH CAP.





CAP DETAILS











- 1. CAP FOR IDC WIRE TO BOARD CONNECTION.
- 2. CAP MATERIAL: GLASS FILLED NYLON 46, COLOR SEE PAGE 35.
- 3. CAPS DESIGNED TO ACCOMMODATE WIRE INSULATION DIAMETERS 0.75MM TO 1.5MM.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED.
- 5. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPEC 201-01-126, APPLICATION NOTES 201-01-124.
- 6. PACKING IN BAGS, QUANTITY 2000 PER BAG.
- 7. FOR INSTALATION DETAILS REFER TO DRAWING 70-9176-001-4XX-006S.

General Information





The 917X series of surface mount Insulation Displacement Connectors (IDC) were developed to meet the harsh automotive and industrial market applications for connecting individual wires directly to a PCB ranging from 14 AWG to 28 AWG. This industry proven contact system has been tested to automotive levels of shock, vibration, and temperature cycling to prove their reliability and robustness. This new single contact was developed as a standalone component to enhance the application uses with the IDC technology. The simplicity of inserting a wire into an SMT contact with a small tool or optional retention / termination cap allows a wide range of devices to be connected to the PCB without soldering. In SSL applications specifically, these contacts are used to bring power and signal onto the PCB or are used to daisy chain multiple boards together in a long string. While the IDC contact provides a gas-tight connection to conductor of the wire, the optional cap provides a positive strain relief even in the harshest conditions. In case of repair, the wires can be removed and replace up to three times.

The single 9176 series contact and cap accepts 18 AWG to 24 AWG wires with an insulation diameter ranging from 1.1mm to 2.1mm. These dual beam contacts support a 10 amp current rating with a large SMT solder base to provide maximum stability on the PCB. The optional locking strain relief cap acts as the termination tool for severe vibration applications.

APPLICATIONS

- Connecting discrete wire components directly to the PCB
- · Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- Application notes: refer to 201-01-124

FEATURES AND BENEFITS

- IDC contact is supplied in T&R pockets for standard SMT placement
- · IDC contact provides a gas-tight connection to the PCB for long term reliability
- Optional termination cap provides additional strain relief for severe environments
- Tested to automotive levels on shock, vibration and temperature cycling for reliability
- Reduced total applied cost versus solder or crimp processes
- Individual contacts can be located anywhere on the PCB based on specific application

ELECTRICAL

- Current Rating: 10 Amps/Contact
- Voltage Rating: Dependent on component proximity


ENVIRONMENTAL


 Operating Temperature: -40°C to +125°C

MECHANICAL

- · Insulator Material: Nylon 46: UL94V0
- · Contact Material: Phosphor Bronze
- · Plating: Tin over Nickel
- Durability: 3 Cycles

HOW TO ORDER - CONTACT OPTIONS








4XX



HOW TO ORDER - CAP OPTIONS









CONNECTOR/TOOLING PART NUMBER MATRIX

	SERIES 9176-500 IDC			HAND INSERTION TOOLING*		ACCESSORY CAPS		
AWG	Wire Insulation	Positions	Part Number	Plastic (medium volume)	Metal (high volume)	Cap Application Tool	White	Black
18	Ø 1.6 - 2.1	1p	709176001501006	069176702001000	069176701901000	069176701801000	609176001521100	609176001521000
20	Ø 1.6 - 2.1	1p	709176001511006	069176702001000	069176701901000	069176701801000	609176001521100	609176001521000
22	Ø 1.1 - 1.6	1p	709176001522006	069176702002000	069176701902000	069176701801000	609176001516100	609176001516000
24	Ø 1.1 - 1.6	1p	709176001532006	069176702002000	069176701902000	069176701801000	609176001516100	609176001516000


^{*} Hand Insertion Tooling and Cap Application - Universal Hand Tool 067000773001000; Consult Application Notes 201-01-124


Certification: UL File #E90723


Contact Details



CONTACT DETAILS










Code	Accepted Wire Gauge	Α
501	18 AWG Stranded	0.74
511	20 AWG Solid and Stranded	0.60
522	22 AWG Solid and Stranded	0.47
532	24 AWG Solid and Stranded	0.37


AREA AVAILABLE FOR PICK & PLACE 2.00mm SQUARE

NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3. CONTACT PLATING: PURE TIN.
- 4. CONNECTOR DESIGNED TO ACCEPT BETWEEN 20AWG AND 24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 5. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED
- FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPEC 201-01-126 AND APPLICATION NOTES 201-01-124.
- 7. SMT PCB LAYOUT, REFER TO SHEET 3.
- 8. PACKING IN TAPE AND REEL, QUANTITY 1000 PER REEL.
- 9. WHEN REQUIRED, MATCHING CAP DETAILS ON DRAWING 60-9176-001-5XX-X00S
- 10. ASSEMBLY TOOLING ON SHEETS 4 (WITH CAP) AND 5 (WITHOUT CAP).



REEL QTY	1000
LEADER	480mm
TRAILER	120mm

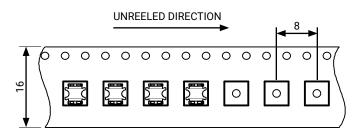


PBC Layout




18-24 AWG IDC WIRE TO BOARD CONNECTOR SINGLE CONTACT


SMT PCB LAYOUT


PURE TIN PADS

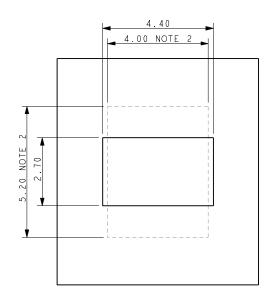

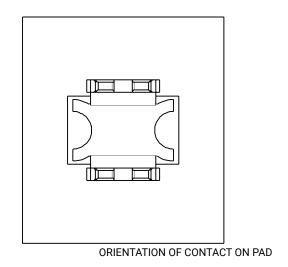

ASSEMBLED/INSTALLED PRODUCTS

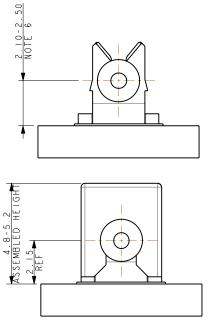

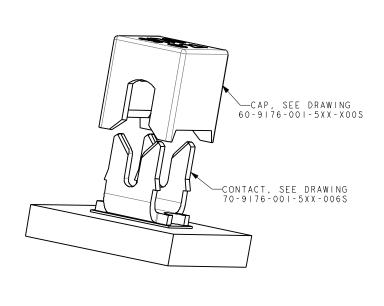


- 1. CONNECTOR CAN BE USED WITH CONTACT ONLY OR WITH OPTIONAL CAP.
- 2. OUTLINE OF CAP WHEN USED.
- 3. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPEC 201-01-126 AND 201-01-124.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED.
- 5. ASSEMBLY TOOLING ON SHEETS 4 (WITH CAP) AND 5 (WITHOUT CAP).
- 6. WIRE CENTRE LINE HEIGHT ABOVE THE PCB, THIS INCLUDES AN ALLOWANCE OF 0.10MM FOR SOLDER AND


Assembly Tooling



ASSEMBLY TOOLING - CAP USED

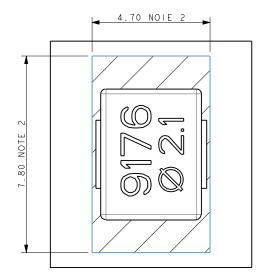


- 1. ASSEMBLY TOOLING FOR CAP.
- 2. AREA OF PCB TO BE KEPT CLEAR OF COMPONENTS, TACKS PERMISSIBLE.
- 3. WIRE AND CAP INSERTED IN ONE OPERATION.
- 4. REFER TO APPLICATION NOTE 201-01-124 FOR FURTHER INFORMATION.
- 5. REFER BELOW WHEN CONTACT USED WITHOUT CAP.

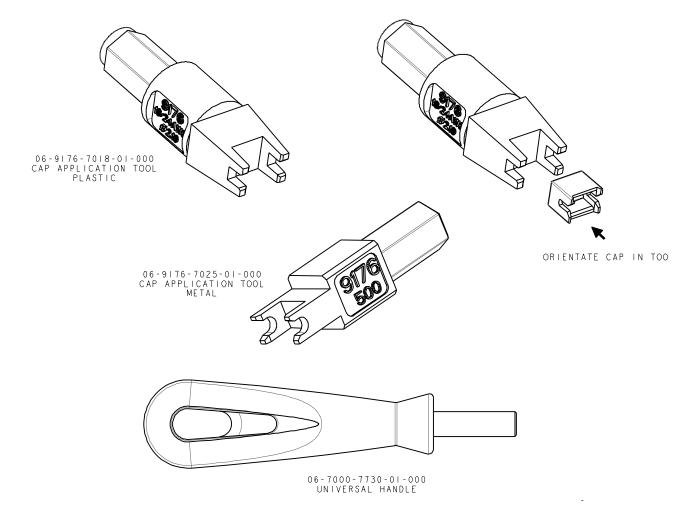

Assembly Tooling




ASSEMBLY TOOLING - CAP NOT USED WIRE ONTO CONTACT

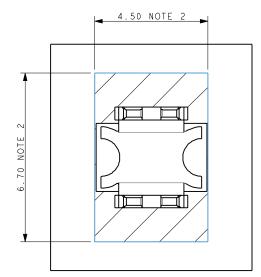

- 1. ASSEMBLY TOOLING FOR CONTACT ONLY, NO CAP USED.
- 2. MINIMUM AREA OF PCB TO BE KEPT CLEAR OF COMPONENTS, TRACKS PERMISSIBLE.
- 3. REFER TO TABLE FOR CORRECT TOOL/WIRE COMBINATION.
- 4. REFER TO APPLICATION NOTE 201-01-124 FOR FURTHER INFORMATION


WIRE INSULATION Ø	METAL TOOL HIGH VOLUME	PLASTIC TOOL SMALL TO MEDIUM VOLUME	HANDLE
1.10 to 1.60	06-9176-7019-02-000	06-9176-7020-02-000	06-7000-7730-01-000
1.60 to 2.10	06-9176-7019-01-000	06-9176-7020-01-000	06-7000-7730-01-000

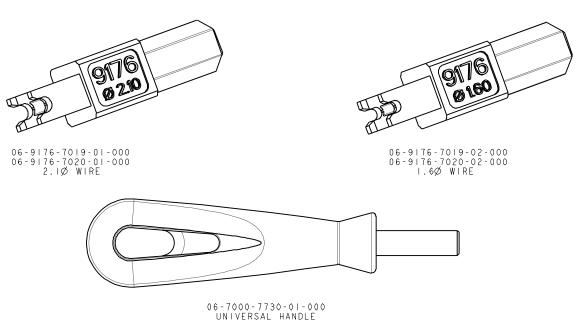


Cap Details





CAP DETAILS












Code	Insulator Diameter (AWG)	В	Text C
516	1.1 to 1.6 (22-24)	1.00	Ø 1.6
521	1.6 to 2.1 (18-20)	1.50	Ø 2.1

- 1. CAP FOR IDC WIRE TO BOARD CONNECTION.
- 2. CAP MATERIAL: GLASS FILLED NYLON 46, COLOR SEE PAGE 41.
- 3. CAPS DESIGNED TO ACCOMMODATE WIRE INSULATION DIAMETERS 1.1MM TO 2.1MM.
- 4. ALL DIMENSIONS FOR REFERENCE UNLESS OTHERWISE STATED.
- 5. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPEC 201-01-106, APPLICATION NOTES 201-01-124.
- 6. PACKING IN BAGS, QUANTITY 1000 PER BAG.
- 7. FOR INSTALATION DETAILS REFER TO DRAWING 70-9176-001-XX-006S.

SINGLE TINE PTH 18-24 AWG: 9176-600

General Information



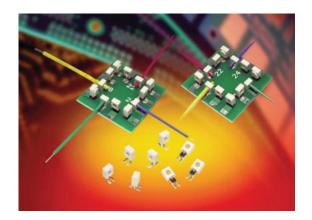

The market and applications for simple and reliable discrete Wire-to-Board (WTB) connectors continue to evolve. Developed for harsh industrial and automotive applications, Insulation Displacement Connectors (IDC) have been used in hundreds of applications connecting wires to PCB's from transportation wiring to every day LED lighting and smart meter/sensor connections. Size, performance and simplicity have been the key factors for selecting this connector when long term reliability is critical.

This single contact version of the proven 9176 family of connectors is the first in Plated Through Hole (PTH) termination. While supporting all of the features and benefits from the SMT offering, this connector provides a new option for a small, cost effective and high performance WTB solution.

APPLICATIONS

- Machine Controls: motors, drives, solenoids, sensors, fans and pumps
- · Commercial Buildings: controls, security, fire and sensors
- · Smart Grid: meters, breakers and panels
- · SSL/LED: bulbs, fixtures, signage and streetlights
- · Application notes: reference 201-01-142

FEATURES AND BENEFITS

- IDC contact provides a gas-tight connection to the PCB for long term reliability
- Plastic cap retains the contact and then acts as the assembly tool to terminate the wires; no special tooling.
- Tested to automotive levels on shock, vibration and temperature cycling for reliability
- The IDC contact reduces the total applied cost versus solder or crimp processes
- Connectors are available in two configurations for maximum flexibility:
 End and Through Wire

ELECTRICAL

- Current Rating: See matrix below
- Voltage Rating: 600 VAC


ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C


MECHANICAL

- Contact Material: Phosphor Bronze
- Contact Plating: Tin over Nickel
- · Durability: 3 Cycles

HOW TO ORDER

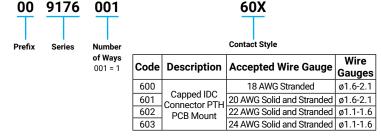



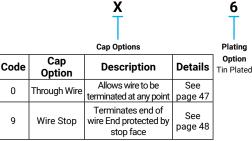

CURRENT RATING


18AWG	20AWG	22AWG	24AWG
9A	8A	6A	5A


Certification: UL File #E90723








18-24 AWG 1 WAY PTH CONNECTOR THROUGH WIRE CAPPED













Code	Accepted Wire Gauge	Α	Wire Insulation	В
600	18 AWG Stranded	0.74	Ø 1.6-2.1	2.1
601	20 AWG Solid or Stranded	0.60	Ø 1.6-2.1	2.1
602	22 AWG Solid or Stranded	0.47	Ø 1.1-1.6	1.6
603	24 AWG Solid or Stranded	0.37	Ø 1.1-1.6	1.6

PACKING DETAILS

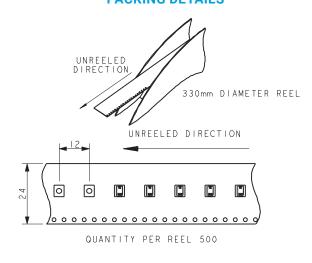


SUGGESTED PCB LAYOUT

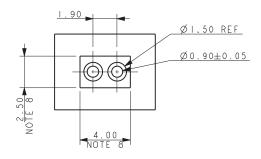



- 1 WAY CONNECTOR FOR PTH WIRE TO BOARD CONNECTION, PRE-ASSEMBLED THROUGH WIRE CAP, CODE SEE PAGE 46.
- CONTAT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY, MAXIMUM DIAMETER 1.8MM.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-163.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-142.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 500.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-O. COLOR REFER TO PAGE 46.




18-24 AWG 1 WAY PTH CONNECTOR WIRE STOP CAPPED





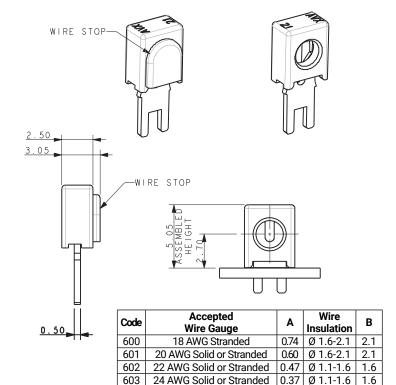


SUGGESTED PCB LAYOUT

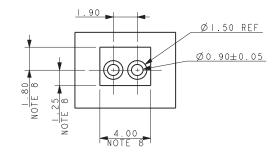




PACKING DETAILS

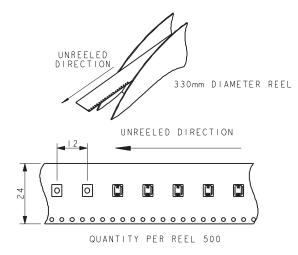


- 1 WAY CONNECTOR FOR PTH WIRE TO BOARD CONNECTION, PRE-ASSEMBLED WIRE STOP CAP, CODE SEE PAGE 46.
- CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY, MAXIMUM DIAMETER 1.8MM.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-163.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-142.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 500.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-O. COLOR REFER TO PAGE 46.
- 11. WIRE STOP CAP PROTECTS END OF WIRE.





18-24 AWG ASSEMBLED CAPPED PTH CONNECTORS






NOMINAL ASSEMBLED HEIGHTS





TYPICAL THROUGH WIRE ASSEMBLIES






TYPICAL WIRE STOP ASSEMBLIES

SINGLE TINE SMT 18-24 AWG: 9176-650

General Information





The market and applications for simple and reliable discrete Wire-to-Board (WTB) connectors continue to evolve. Developed for harsh industrial and automotive applications, Insulation Displacement Connectors (IDC) have been used in hundreds of applications connecting wires to PCB's from transportation wiring to every day LED lighting and smart meter/sensor connections. Size, performance and simplicity have been the key factors for selecting this connector when long term reliability is critical.

This single contact version of the proven 9176 family of connectors offers a lower cost solution to the market with only a 10% reduction in current rating. The SMT footprint is backward compatible with the standard dual contact configurations; offers all the same wire gauges and termination benefits of the integrated cap and provides a 10% height reduction.

APPLICATIONS

- Machine Controls: motors, drives, solenoids, sensors, fans and pumps
- Commercial Buildings: controls, security, fire and sensors
- Smart Grid: meters, breakers and panels
- SSL/LED: bulbs, fixtures, signage and streetlights
- Application notes: reference 201-01-142

FEATURES AND BENEFITS

- IDC contact provides a gas-tight connection to the PCB for long term reliability
- Plastic cap retains the contact in position prior to automatic placement, then acts as the assembly tool to terminate the wires; no special tooling.
- Tested to automotive levels on shock, vibration and temperature cycling for reliability
- Identical contact and footprint pattern to the existing 9176 for full backward compatibility and functionality
- The IDC contact reduces the total applied cost versus solder or crimp
- Connectors are available in two configurations for maximum flexibility: End and Through Wire

ELECTRICAL

Current Rating: See matrix below

9176

001

Voltage Rating: 600 VAC

ENVIRONMENTAL

65X


· Operating Temperature: -40°C to +125°C

MECHANICAL

- Contact Material: Phosphor Bronze
- Contact Plating: Tin over Nickel
- **Durability: 3 Cycles**

HOW TO ORDER

00

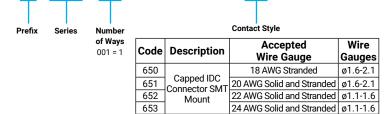



9 = UL White



6 Plating Option

Code Cap Option		Description	Details
0	Through Wire	Allows wire to be terminated at any point	See page 51
9	Wire Stop	Terminates end of wire End protected by stop face	See page 52

CURRENT RATING

18AWG	20AWG	22AWG	24AWG
9A	8A	6A	5A


Certification: UL File #E90723





Tin Plated





18-24 AWG 1 WAY IDC CONNECTOR THROUGH WIRE CAPPED













Code	Accepted Wire Gauge	A	Wire Insulation	В
600	18 AWG Stranded	0.74	Ø 1.6-2.1	2.1
601	20 AWG Solid or Stranded	0.60	Ø 1.6-2.1	2.1
602	22 AWG Solid or Stranded	0.47	Ø 1.1-1.6	1.6
603	24 AWG Solid or Stranded	0.37	Ø 1.1-1.6	1.6



PACKING DETAILS

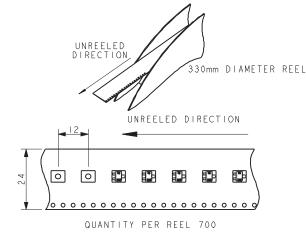


SUGGESTED PCB LAYOUT



- 1 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION, PRE-ASSEMBLED THROUGH WIRE CAP, CODE SEE PAGE 50.
- CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY, MAXIMUM DIAMETER 1.8MM.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-163.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-142.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 700.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-O. COLOR REFER TO PAGE 50.



18-24 AWG 1 WAY IDC CONNECTOR WIRE STOP CAPPED

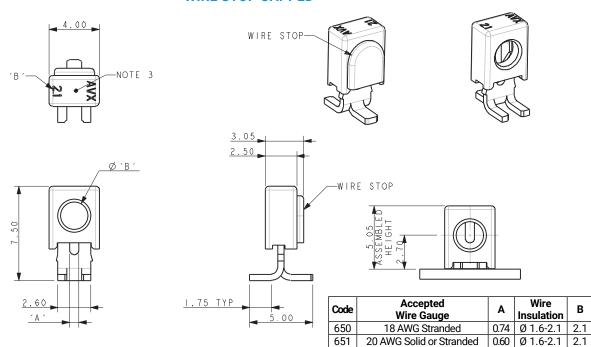

SUGGESTED PCB LAYOUT


24 AWG Solid or Stranded | 0.37 | Ø 1.1-1.6 | 1.6


0.47 Ø 1.1-1.6 | 1.6

22 AWG Solid or Stranded



PACKING DETAILS

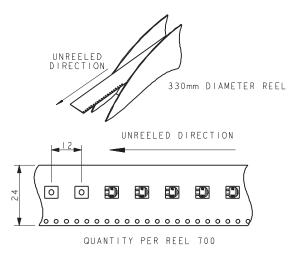





- 1. 1 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTION, PRE-ASSEMBLED WIRE STOP CAP, CODE SEE PAGE 50.
- CONTACT/CAP TO MATCH 20AWG-24AWG SOLID AND STRANDED WIRES, 18AWG WILL ONLY ACCEPT STRANDED WIRES, SEE TABLE.
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY, MAXIMUM DIAMETER 1.8MM.
- 4. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-163.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-142.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 700.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATION MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED, UL94 V-O. COLOR REFER TO PAGE 50.
- 11. WIRE STOP CAP PROTECTS END OF WIRE.





18-24 AWG ASSEMBLED CAPPED IDC CONNECTORS






NOMINAL ASSEMBLED HEIGHTS





TYPICAL THROUGH WIRE ASSEMBLIES





TYPICAL WIRE STOP ASSEMBLIES

General Information





GENERAL DESCRIPTION

AVX industrial/transportation grade insulation displacement connectors (IDC) have been proven in the market for over ten years. Providing a very simple one-step termination process, these connectors proved a robust wire-to-board (WTB) termination in harsh applications.

The 9176-800 series has been developed specifically for 22-26AWG discrete wires in size critical applications. By reducing the "Z" axis height by 1.0mm and the overall volume by up to 50%, this new package size is an ideal choice in space constrained applications over previous IDC connectors. In addition, an expanded size range is available starting from a 1 position up to 4 positions in each wire gauge. The entire range provides new packaging solutions in industrial, medical and transportation applications such as smart metering, LED lighting, industrial controls and portable monitoring and measurement devices.

APPLICATIONS

- · Connecting discrete wires and components to a PCB
- · Bringing power and signals onto a PCB
- · Daisy chaining or interconnecting PCB's together
- Application Notes: Refer to 201-01-216

FEATURES AND BENEFITS

- Redundant and fatigue resistant phosphor bronze material provides a gas tight, cold welded connection to the wire
- IDC connectors can be potted or over molded to encapsulate electronic modules and provide environmental protection
- The 1p version is available in industry standard colors to match individual wires for error free wire termination

ELECTRICAL

• Current Rating: 22AWG: 7 amps

24AWG: 6 amps 26AWG: 5 amps 28AWG: 4 amps 30AWG: 3 amps

Voltage Rating: 1p: 600V

2p-4p: 100V

Durability: 1 Cycle


ENVIRONMENTAL


 Operating Temperature: -40°C to +125°C

MECHANICAL


- · Insulator Material: Glass-Filled Nylon 46; UL94V0
- · Contact Material: Phosphor Bronze
- · Plating: Lead-Free Tin Over Nickel

HOW TO ORDER



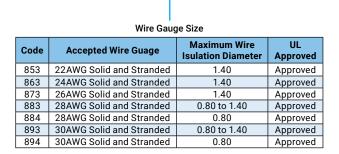

8XX




Certification: UL File #E90723





1 Position





00-9176-001-8XX-X06 1 WAY



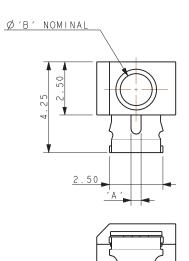

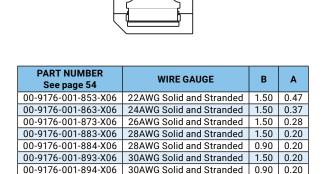







NOTES:

- 1. 1 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTOR.
- 2. CONTACT/CAP TO MATCH 22AWG TO 26AWG STRANDED AND SOLID WIRE, MAXIMUM INSULATOR 1.40 DIAMETER
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION REFER TO AVX SPEC 201-01-215.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-216.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1700.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 54.
- 11. UL REFERENCE E90723 (US AND CANADA).

PACKING DETAILS

SUGGESTED PCB LAYOUT










2 Position



00-9176-001-8XX-X06 2 WAY




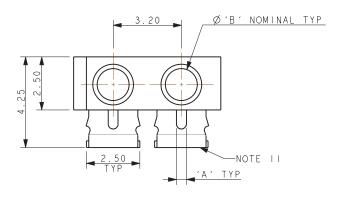





PART NUMBER See page 54	WIRE GAUGE	В	A
00-9176-002-853-X06	22AWG Solid and Stranded	1.50	0.47
00-9176-002-863-X06	24AWG Solid and Stranded	1.50	0.37
00-9176-002-873-X06	26AWG Solid and Stranded	1.50	0.28
00-9176-002-883-X06	28AWG Solid and Stranded	1.50	0.20
00-9176-002-884-X06	28AWG Solid and Stranded	0.90	0.20
00-9176-002-893-X06	30AWG Solid and Stranded	1.50	0.20
00-9176-002-894-X06	30AWG Solid and Stranded	0.90	0.20

SUGGESTED PCB LAYOUT

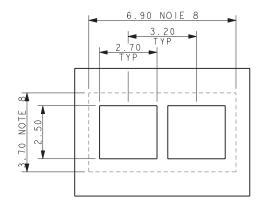







NOTES:


- 1. 2 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTOR.
- 2. CONTACT/CAP TO MATCH 22AWG TO 26AWG STRANDED AND SOLID WIRE, MAXIMUM INSULATOR 1.40 DIAMETER
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION REFER TO AVX SPEC 201-01-215.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-216.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1700.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 54.
- 11. UL REFERENCE E90723 (US AND CANADA).

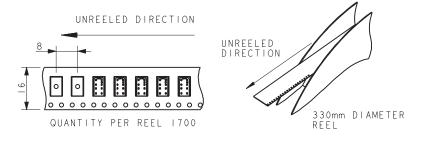





00-9176-001-8XX-X06 3 WAY

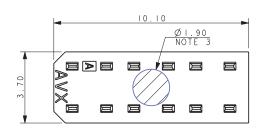


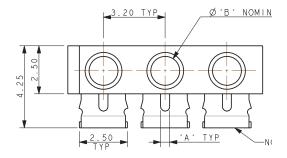



PART NUMBER See page 54	WIRE GAUGE	В	A
00-9176-003-853-X06	22AWG Solid and Stranded	1.50	0.47
00-9176-003-863-X06	24AWG Solid and Stranded	1.50	0.37
00-9176-003-873-X06	26AWG Solid and Stranded	1.50	0.28
00-9176-003-883-X06	28AWG Solid and Stranded	1.50	0.20
00-9176-003-884-X06	28AWG Solid and Stranded	0.90	0.20
00-9176-003-893-X06	30AWG Solid and Stranded	1.50	0.20
00-9176-003-894-X06	30AWG Solid and Stranded	0.90	0.20

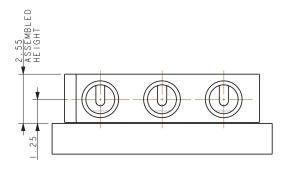






NOTES:

- 1. 3 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTOR.
- 2. CONTACT/CAP TO MATCH 22AWG TO 26AWG STRANDED AND SOLID WIRE, MAXIMUM INSULATOR 1.40 DIAMETER
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION REFER TO AVX SPEC 201-01-215.
- 5. ASSEMBLY PROCEDURE, REFER TO APPLICATION NOTES 201-01-216.
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1700.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 54.
- 11. UL REFERENCE E90723 (US AND CANADA).

SUGGESTED PCB LAYOUT

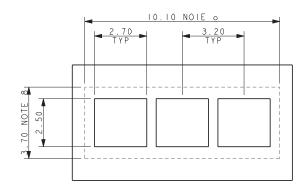








4 Position




00-9176-001-8X3-X06 4 WAY

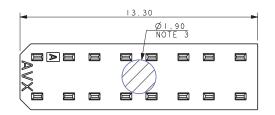


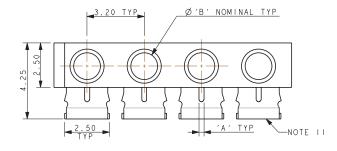



PART NUMBER See page 54	WIRE GAUGE	В	Α
00-9176-004-853-X06	22AWG Solid and Stranded	1.50	0.47
00-9176-004-863-X06	24AWG Solid and Stranded	1.50	0.37
00-9176-004-873-X06	26AWG Solid and Stranded	1.50	0.28
00-9176-004-883-X06	28AWG Solid and Stranded	1.50	0.20
00-9176-004-884-X06	28AWG Solid and Stranded	0.90	0.20
00-9176-004-893-X06	30AWG Solid and Stranded	1.50	0.20
00-9176-004-894-X06	30AWG Solid and Stranded	0.90	0.20

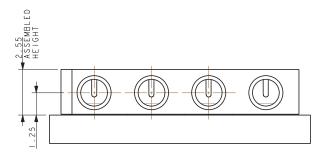





NOTES:

- 1. 4 WAY CONNECTOR FOR IDC WIRE TO BOARD CONNECTOR.
- 2. CONTACT/CAP TO MATCH 22AWG TO 26AWG STRANDED AND SOLID WIRE, MAXIMUM INSULATOR 1.40 DIAMETER
- 3. FLAT FACE ON TOP OF CAP TO AID PICK AND PLACE ASSEMBLY.
- 4. FOR FULL PRODUCT SPECIFICATION REFER TO AVX SPEC 201-01-215.
- $5. \ \ \mathsf{ASSEMBLY} \ \mathsf{PROCEDURE}, \mathsf{REFER} \ \mathsf{TO} \ \mathsf{APPLICATION} \ \mathsf{NOTES} \ \ \mathsf{201-01-216}.$
- 6. GENERAL TOLERANCE ±0.20 UNLESS STATED.
- 7. PACKED IN TAPE AND REEL, QUANTITY PER REEL 1700.
- 8. CONNECTOR OUTLINE.
- 9. CONTACT MATERIAL: TIN PLATED COPPER ALLOY.
- 10. INSULATOR MATERIAL: HIGH TEMPERATURE NYLON, GLASS FILLED. UL94 V-0, COLOR REFER TO PAGE 54.
- 11. UL REFERENCE E90723 (US AND CANADA).


SUGGESTED PCB LAYOUT

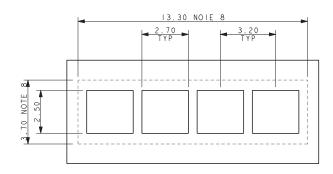

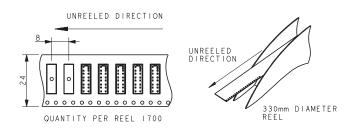



CONNECTOR DETAILS

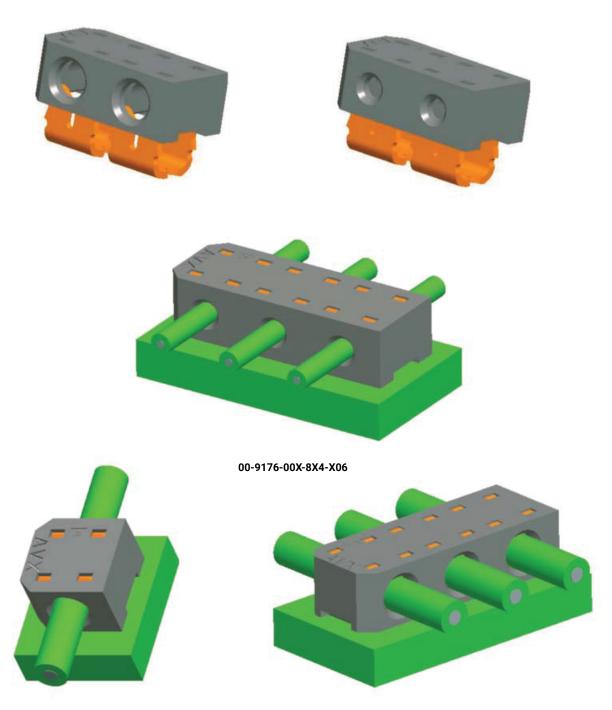

00-9176-00X-8X3-X06

STANDARD 14-20 AWG: 00-9177

General Information





The 917X series of surface mount Insulation Displacement Connectors (IDC) were developed to meet the harsh automotive and industrial market applications for connecting individual wires directly to a PCB ranging from 14 AWG to 28 AWG. This industry proven contact system has been tested to automotive levels of shock, vibration, and temperature cycling to prove their reliability and robustness. The simplicity of inserting a wire into the connector with a small tool allows a wide range of devices to be connected to the PCB without soldering. In SSL applications specifically, these connectors are used to bring power and signal onto the PCB or are used to daisy chain multiple boards together in a long string. While the IDC contact provides a gas-tight connection to conductor of the wire, the housing has been designed to grab the insulation of the wire to provide a positive strain relief even in the harshest conditions. In case of repair, the wires can be removed and replace up to three times.

The 9177 series accepts 14 AWG to 20 AWG wires with an insulation diameter ranging from 2.75mm to 4.25mm. These dual contact connectors support a 15 amp current rating with two large SMT solder tails per wire to provide maximum stability on the PCB. Available in 1p-3p configuration, these connectors can be end stackable for higher pin counts.

APPLICATIONS

- · Connecting discrete wire components directly to the PCB
- Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- · Application Notes: refer to 201-01-124

00X

FEATURES AND BENEFITS

- IDC contact provides a gas-tight connection to the PCB for long term reliability
- Connector housing captures the wire insulation for positive strain relief
- Tested to automotive levels on shock, vibration and temperature cycling for reliability
- Low and high volume assembly tools to match production volumes
- Reduced total applied cost versus solder or crimp processes

8

9

High temperature insulator capable to 260°C reflow soldering processes

ELECTRICAL

- Current Rating: 15 Amp / Contact
- Voltage Rating: 600 VAC

ENVIRONMENTAL


· Operating Temperature: -40°C to +125°C


MECHANICAL

- Insulator Material: Nylon 46: UL94V0
- Contact Material: Phosphor Bronze
- Plating: Tin over Nickel
- **Durability: 3 Cycles**

HOW TO ORDER 9177

00





0XX




Code Color Approval Black Special Order - NON-UL White Special Order - NON-UL Black Special Order - UL APPROVED Standard - UL APPROVED White






06 =

HOW TO ORDER - CAP OPTIONS - THROUGH WIRE

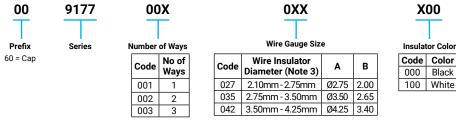

HOW TO ORDER - CAP OPTIONS - WIRE STOP

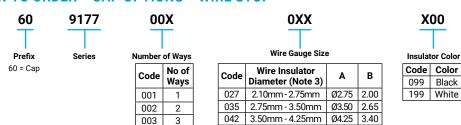

Certification: UL File # E320991, check UL conditions of use for specific ratings and details



STANDARD 14-20 AWG: 00-9177

General Information



CONNECTOR/TOOLING PART NUMBER MATRIX

SERIES 9177 IDC		HAND INSERTION TOOLING*		ACCESSORY CAPS				
AWG	Wire Insulation	Positions	Color	Part Number	Plastic (low volume)	Metal (high volume)	Through Wire	Wire Stop
14	Ø 4.25	1p	White	009177001001106	069177701601001	069177701701001	609177001042100	609177001042199
14	Ø 4.25	1p	Black	009177001001006	069177701601001	069177701701001	609177001042000	609177001042099
14	Ø 4.25	2p	White	009177002001106	069177701601002	069177701701002	609177002042100	609177002042199
14	Ø 4.25	2p	Black	009177002001006	069177701601002	069177701701002	609177002042000	609177002042099
14	Ø 4.25	3p	White	009177003001106	069177701601003	069177701701003	609177003042100	609177003042199
14	Ø 4.25	3р	Black	009177003001006	069177701601003	069177701701003	609177003042000	609177003042099
16	Ø 3.50	1p	White	009177001012106	069177701602001	069177701702001	609177001035100	609177001035199
16	Ø 3.50	1p	Black	009177001012006	069177701602001	069177701702001	609177001035000	609177001035099
16	Ø 3.50	2p	White	009177002012106	069177701602002	069177701702002	609177002035100	609177002035199
16	Ø 3.50	2p	Black	009177002012006	069177701602002	069177701702002	609177002035000	609177002035099
16	Ø 3.50	3p	White	009177003012106	069177701602003	069177701702003	609177003035100	609177003035199
16	Ø 3.50	3p	Black	009177003012006	069177701602003	069177701702003	609177003035000	609177003035099
18	Ø 3.50	1p	White	009177001022106	069177701602001	069177701702001	609177001035100	609177001035199
18	Ø 3.50	1p	Black	009177001022006	069177701602001	069177701702001	609177001035000	609177001035099
18	Ø 3.50	2p	White	009177002022106	069177701602002	069177701702002	609177002035100	609177002035199
18	Ø 3.50	2p	Black	009177002022006	069177701602002	069177701702002	609177002035000	609177002035099
18	Ø 3.50	3p	White	009177003022106	069177701602003	069177701702003	609177003035100	609177003035199
18	Ø 3.50	3р	Black	009177003022006	069177701602003	069177701702003	609177003035000	609177003035099
20	Ø 2.75	1p	White	009177001033106	069177701603001	069177701703001	609177001027100	609177001027199
20	Ø 2.75	1p	Black	009177001033006	069177701603001	069177701703001	609177001027000	609177001027099
20	Ø 2.75	2p	White	009177002033106	069177701603002	069177701703002	609177002027100	609177002027199
20	Ø 2.75	2p	Black	009177002033006	069177701603002	069177701703002	609177002027000	609177002027099
20	Ø 2.75	3p	White	009177003033106	069177701603003	069177701703003	609177003027100	609177003027199
20	Ø 2.75	3p	Black	009177003033006	069177701603003	069177701703003	609177003027000	609177003027099
		* Inse	ertion Tooli	ing - Requires Hand Pr	ess with Flat Rock Pla	tes; Consult Applicatio	n Notes 201-01-124	


1 Position



14-20 AWG 1 WAY IDC CONNECTOR


→ Pick and place area 2.375 x 9.00mm MIN






NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMP NYLON 46, COLOUR REFER TO SHEET 1.
- 3. CONNECTOR DESIGNED TO ACCEPT BETWEEN 14AWG AND 20AWG SOLID AND STRANDED WIRE.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-109, UL COMPONENTS REFER TO ELCO SPEC 201-01-109UL.
- 6. APPLICATION NOTES 201-01-124
- 7. FOR UL PRODUCT CODES UL REFERENCE E320991.
- 8. FOR PCB SPACE RESTRICTED BY ASSEMBLY TOOLING REFER TO SHEET 6

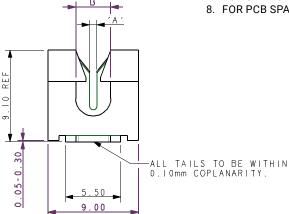





Code	Accepted Wire Gauge	Α	Wire	В
			Insulation	
001	14 AWG Solid or Stranded	1.10	Ø 4.25 max	4.25
012	16 AWG Solid or Stranded	0.82	Ø 3.50 max	3.50
022	18 AWG Solid or Stranded	0.72	Ø 3.50 max	3.50
033	20 AWG Solid or Stranded	0.60	Ø 2.75 max	2.75




SMT PCB LAYOUT


PURE TIN PADS




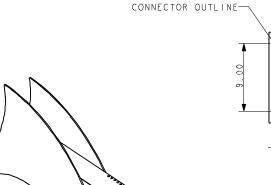



9.00



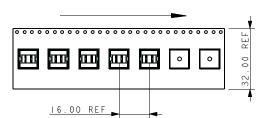




2 Position



14-20 AWG 2 WAY IDC CONNECTOR

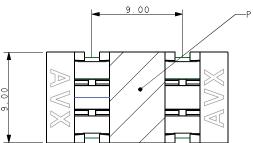



-PICK UP AREA 4.75 x 9.00mm MIN




NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMP NYLON 46, COLOUR REFER TO SHEET 1.
- 3. CONNECTOR DESIGN TO ACCEPT BETWEEN 14AWG AND 20AWG SOLID AND STRANDED WIRE.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLLERANCED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-109, UL COMPONENTS REFER TO ELCO SPEC 201-01-109UL.
- 6. APPLICATION NTOES 201-01-124.
- 7. FOR UL PRODUCT CODES UL REFERENCE E320991
- 8. FOR PCB SPACE RESTRICTED BY ASSEMBLY TOOLING REFER TO SHEET 6

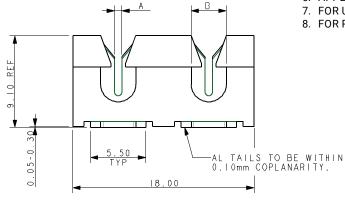







Code	Accepted Wire Gauge	Α	Wire Insulation	В
001	14 AWG Solid or Stranded	1.10	Ø 4.25 max	4.25
012	16 AWG Solid or Stranded	0.82	Ø 3.50 max	3.50
022	18 AWG Solid or Stranded	0.72	Ø 3.50 max	3.50
033	20 AWG Solid or Stranded	0.60	Ø 2.75 max	2.75

SMT PCB LAYOUT

PURE TIN PADS

9.00






REEL DIAMETER 330mm

CONNECTOR OUTLINE 5.90 8.00 16.00 REF

3 Position





14-20 AWG 3 WAY IDC CONNECTOR

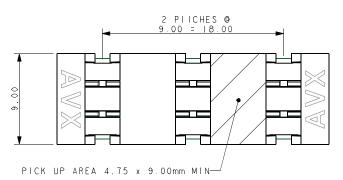


NOTES:

- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION.
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE.
 - INSULATION MATERIAL: HIGH TEMP NYLON 46, COLOUR REFER TO SHEET 1
- 3. CONNECTOR DESIGNED TO ACCEPT BETWEEN 14AWG AND 20AWG SOLID AND STRANDED WIRE.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED.
- FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-109, UL COMPONENTS REFER TO ELCO SPEC 201-01-109UL.
- 6. APPLICATION NOTES 201-01-124.
- 7. FOR UL PRODUCT CODES UL REFERENCE E320991.
- 8. FOR PCO SPACE RESTICTED BY ASSEMBLY TOOLING REFER TO SHEET 6

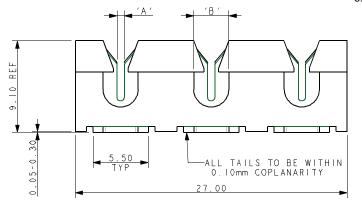




Code	Accepted Wire Gauge	Α	Wire Insulation	В
001	14 AWG Solid or Stranded	1.10	Ø 4.25 max	4.25
012	16 AWG Solid or Stranded	0.82	Ø 3.50 max	3.50
022	18 AWG Solid or Stranded	0.72	Ø 3.50 max	3.50
033	20 AWG Solid or Stranded	0.60	Ø 2.75 max	2.75



SMT PCB LAYOUT

PURE TIN PADS

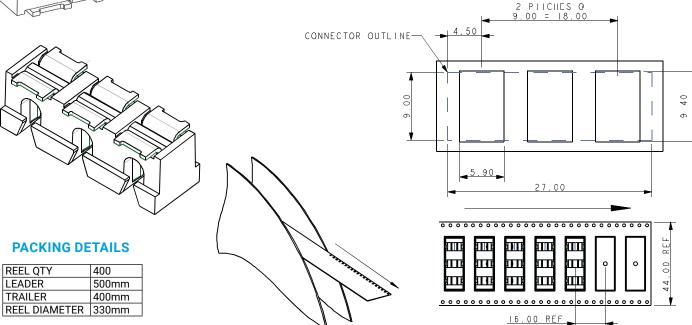


STANDARD 14-20 AWG: 00-9177


Assessory Cap - Through Wire




ACCESSORY CAP - THROUGH WIRE


HOW TO ORDER

















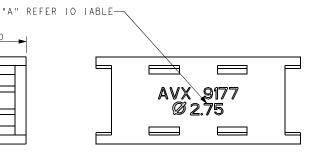

ASSEMBLED DIMENSIONS

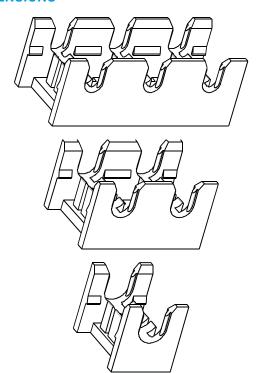

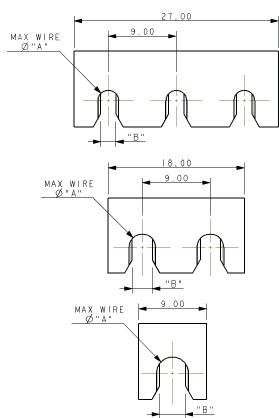


- 1. CAP FOR 9177 IDC WIRE TO BOARD CONNECTOR.
- 2. THROUGH WIRE CAP CAN BE USED AT ANY POSITION ALONG WIRE.
- 3. REFERS TO CAP, FOR WIRE MATCH TO CONNECTOR REFER TO TABLE ON SHEET
- 4. MATERIAL: GLASS FILLED NYLON 46, FOR COLOUR REFER TO TABLE
- 5. CAPS DESIGNED TO ACCOODATE INSULATION DIAMETERS REFER TO TABLE.
- 6. GENERAL TOLERANCE ±0.20mm.
- 7. PACKED IN BAGS, 400 PIECES PER BAG
- 8. APPLICATION NOTES REFER TO ELCO SPECIFICATION 201-01-124


STANDARD 14-20 AWG: 00-9177


Assessory Cap - Wire Stop



ACCESSORY CAP - WIRE STOP







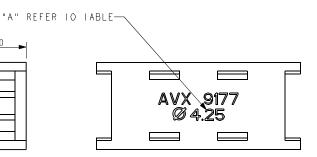





ASSEMBLED DIMENSIONS







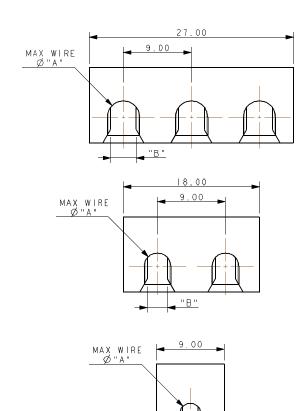

- 1. CAP FOR 9177 IDC WIRE TO BOARD CONNECTOR.
- 2. THROUGH WIRE CAP CAN BE USED AT ANY POSITION ALONG WIRE.
- 3. REFERS TO CAP, FOR WIRE MATCH TO CONNECTOR REFER TO TABLE ON PAGE 60.
- 4. MATERIAL: GLASS FILLED NYLON 46. FOR COLOR REFER TO PAGE 60.
- 5. CAPS DESIGNED TO ACCOMMODATE INSULATION DIAMETERS REFER TO PAGE 60.
- 6. GENERAL TOLERANCE ±0.20MM.
- 7. PACKED IN BAGS, 400 PIECES PER BAG.
- 8. APPLICATION NOTES REFER TO ELCO SPECIFICATION 201-01-124.


Insertion Tooling




INSERTION TOOLING - REQUIRES HAND PRESS WITH FLAT ROCK PLATES











HIGH PRODUCTION Metal

No. of Ways	Max Insulation Dia (AWG)	Tool Part Number
	ø 4.25	06-9177-7017-01-001
1	ø 3.50	06-9177-7017-02-001
	ø 2.75	06-9177-7017-03-001
	ø 4.25	06-9177-7017-01-002
2	ø 3.50	06-9177-7017-02-002
	ø 2.75	06-9177-7017-03-002
	ø 4.25	06-9177-7017-01-003
3	ø 3.50	06-9177-7017-02-003
	ø 2.75	06-9177-7017-03-003

MEDIUM PRODUCTION Plastic

No. of Ways	Max Insulation Dia (AWG)	Tool Part Number
	ø 4.25	06-9177-7016-01-001
1	ø 3.50	06-9177-7016-02-001
	ø 2.75	06-9177-7016-03-001
	ø 4.25	06-9177-7016-01-002
2	ø 3.50	06-9177-7016-02-002
	ø 2.75	06-9177-7016-03-002
	ø 4.25	06-9177-7016-01-003
3	ø 3.50	06-9177-7016-02-003
	ø 2.75	06-9177-7016-03- 003


The assembly tooling restricts the available space/component heights on the PCB.

For details see below.

NOTES:

- 1. ALL DIMENSIONS FOR REFERENCE DIMENSIONS.
- 2. MAXIMUM COMPONENT HEIGHT 0.80MM IN THIS AREA.
- 3. MAXIMUM COMPONENT HEIGHT 11.00 MM IN THIS AREA.
- 4. THE SAME RESTRICTIONS APPLY TO ALL WIRE INSULATION DIAMETERS.

INSERTION TOOLING - PCB RESTRICTED AREAS FOR ASSEMBLY TOOLING

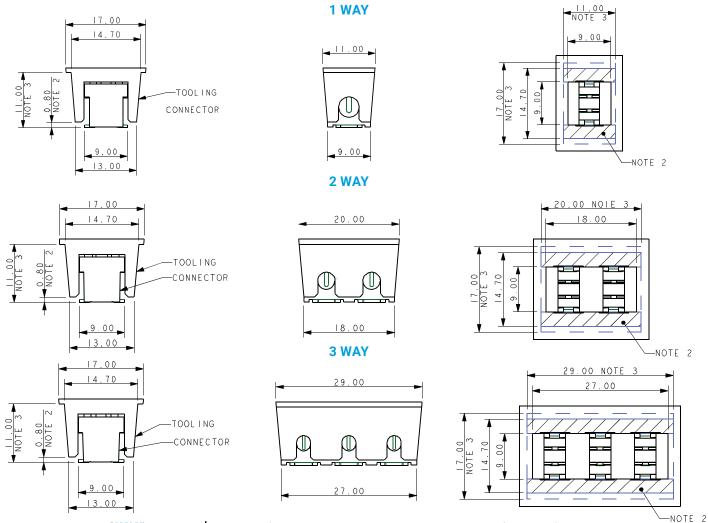


STANDARD 14-20 AWG: 00-9177

Assembled Connector





STANDARD CONNECTOR

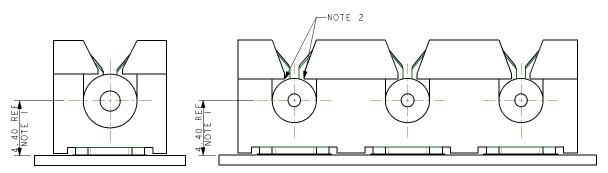



CONNECTOR WITH CAP



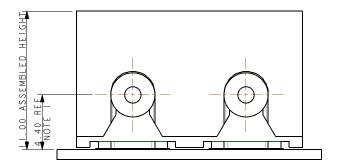

- 1. ASSEMBLED HEIGHTS INCLUDE 0.10mm ALLOWANCE FOR PAD AND SOLDER THICKNESS, NO ALLOWANCE HAS BEEN MADE FOR ANY SOLDER RESIST OR OTHER FEATURES.
- 2. WHEN THE WIRE IS ASSEMBLED THE INSULATION SHOULD BE TRAPPED BY THESE EDGES.

CAPPED THRU HOLE 12-18 AWG: 00-9177

General Information





AVX developed the initial SMT discrete wire IDC connector 5 years ago for 26-28AWG AVX wires. Since then, we have seen this Wire-to-Board (WTB) contact technology spread to multiple wire gauges and multiple configurations; standard connectors, capped connectors and single contacts. All of which addresses specific application or cost parameters set forth by our customer in demanding industrial, transportation or commercial applications. The heart of the IDC connector is the true "gas tight" WTB termination that is achieved once the wire is inserted between the dual phosphor bronze contact tines. These opposing tines provide enough spring characteristics to allow the termination to remain stable over extreme levels of temperature, shock and vibration.

The new 9177-600 family of contacts incorporates all of the above mentioned capabilities. From low cost single contacts to fully integrated capped contacts. The unique feature of the 600 series is the fact that it was developed for Plated Through Hole (PTH) termination to the PCB. This addresses the rugged power type boards that have to handle larger wire gauges up to 12AWG and 15 Amps per contact of current. The PTH option provides robust PCB attachment and high current capabilities to replace older technology connectors or in most cases soldering stripped wires directly to the PCB.

APPLICATIONS

- · Industrial pumps, motors and driver boards
- Solar and alternative energy products
- Commercial electrical equipment
- Reference Product Specification & application notes 201-01-141/142

FEATURES AND BENEFITS

- · IDC contact provides a "gas tight" wire termination to the PCB to meet harsh industrial environments
- Simple, robust design offers a high performance solution to hand soldering large gauge wires to a PCB
- A single contact an handle up to 15A for high current applications with wire replacement up to 3 times
- The versatile family of IDC contact can accept 12-18AWG of stranded wires and can be tested for compliance with solid wires

ELECTRICAL

- Current Rating: 15A
- Voltage Rating: 600 VAC

ENVIRONMENTAL

· Operating Temperature: -40°C to +125°C


MECHANICAL

White - Standard


White - Standard

- · Insulator Material: Nylon 46, UL94VO
- · Contact Material: Phosphor Bronze
- · Plating: Tin over Nickel
- · Durability: Wires can be replaced up to 3 time

HOW TO ORDER

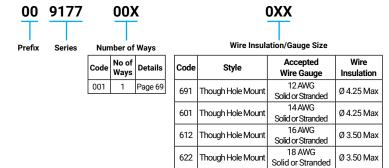








10

CAPPED THRU HOLE 12-18 AWG: 00-9177

1 Position - Through Wire




12 - 18 AWG 1 WAY IDC CONNECTOR WIRE THROUGH CAP




1.25 TYP


NOTES:


- 1. CONNECTOR FOR IDC WIRE TO BOARD CONNECTION, WIRE THROUGH CAP, CAN BE ASSEMBLED AT ANY POSITION ALONG A WIRE.
- CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMP NYLON 46. UL94 V-0. COLOR REFER TO PAGE 68.
- 3. CONNECTOR DESIGNED TO ACCEPT BETWEEN 12 AND 18 AWG STRANDED WIRE.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-141.
- 6. APPLICATION NOTES 201-01-142.
- 7. OUTLINE OF CAP. NO SPACE FOR COMPONENTS.
- 8. TEST TO INDICATE MAXIMUM INSULATION DIAMETER.





PACKING DETAILS




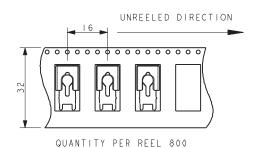

Code Accepted Wire Gauge Wire В Insulation 12 AWG Solid or Stranded 1.50 Ø 4.25 Max 4.25 14 AWG Solid or Stranded 1.10 Ø 4.25 Max 4.25 601 612 16 AWG Solid or Stranded 0.82 Ø 3.50 Max | 3.50 18 AWG Solid or Stranded | 0.72 | Ø 3.50 Max | 3.50

SMT PCB LAYOUT


PURE TIN PADS



1 Position - Wire Stop




12 - 18 AWG 1 WAY IDC CONNECTOR WIRE STOP CAP




15.40 1.52 TYP

NOTES:

- CONNECTOR FOR IDC WIRE TO BORAD CONNECTION, WIRE STOP CAP, FOR USE AT WIRE END.
- CONTACT MATERIAL: PHOSPHOR BRONZE. INSULATION MATERIAL: HIGH TEMP NYLON 46. UL94 V-0. COLOR REFER TO PAGE 68.
- 3. CONNECTOR DESIGNED TO ACCEPT BETWEEN 12 AND 18 AWG STRANDED WIRE.
- 4. ALL DIMENSIONS ±0.20 UNLESS TOLERANCED.
- 5. FOR FULL PRODUCT SPECIFICATION ON STANDARD CONNECTORS REFER TO ELCO SPEC 201-01-141.
- 6. APPLICATION NOTES 201-01-142.
- 7. OUTLINE OF CAP. NO SPACE FOR COMPONENTS.
- 8. TEST TO INDICATE MAXIMUM INSULATION DIAMETER.
- 9. SLOT TO CHECK WIRE POSITION BEFORE ASSEMBLY.






PACKING DETAILS




330mm DIAMETER REEL

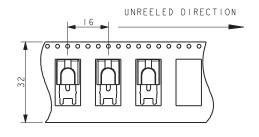

Code	Accepted Wire Gauge	A	Wire Insulation	В
691	12 AWG Solid or Stranded	1.50	Ø 4.25 Max	4.25
601	1 14 AWG Solid or Stranded		Ø 4.25 Max	4.25
612	2 16 AWG Solid or Stranded		Ø 3.50 Max	3.50
622	18 AWG Solid or Stranded	0.72	Ø 3.50 Max	3.50

SMT PCB LAYOUT

PURE TIN PADS

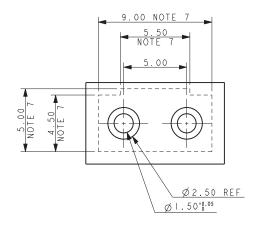

SINGLE THRU HOLE IDC CONTACT 12-18 AWG: 9177-600

General Information





AVX developed the initial SMT discrete wire IDC connector 5 years ago for 26-28AWG AVX wires. Since then, we have seen this Wire-to-Board (WTB) contact technology spread to multiple wire gauges and multiple configurations; standard connectors, capped connectors and single contacts. All of which addresses specific application or cost parameters set forth by our customer in demanding industrial, transportation or commercial applications. The heart of the IDC connector is the true "gas tight" WTB termination that is achieved once the wire is inserted between the dual phosphor bronze contact tines. These opposing tines provide enough spring characteristics to allow the termination to remain stable over extreme levels of temperature, shock and vibration.

The new 9177-600 family of contacts incorporates all of the above mentioned capabilities. From low cost single contacts to fully integrated capped contacts. The unique feature of the 600 series is the fact that it was developed for Plated Through Hole (PTH) termination to the PCB. This addresses the rugged power type boards that have to handle larger wire gauges up to 12AWG and 15 Amps per contact of current. The PTH option provides robust PCB attachment and high current capabilities to replace older technology connectors or in most cases soldering stripped wires directly to the PCB.

APPLICATIONS

- · Industrial pumps, motors and driver boards
- Solar and alternative energy products
- · Commercial electrical equipment
- Reference Product Specification & application notes 201-01-141/142

FEATURES AND BENEFITS

- IDC contact provides a "gas tight" wire termination to the PCB to meet harsh industrial environments
- Simple, robust design offers a high performance solution to hand soldering large gauge wires to a PCB
- A single contact an handle up to 15A for high current applications with wire replacement up to 3 times
- The versatile family of IDC contact can accept 12-18AWG of stranded wires and can be tested for compliance with solid wires

ELECTRICAL

- Current Rating: 15A
- Voltage Rating: 600 VAC

ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C

MECHANICAL

- Insulator Material: Nylon 46, UL94VO
- · Contact Material: Phosphor Bronze
- Plating: Tin over Nickel
- · Durability: Wires can be replaced up to 3 time

HOW TO ORDER - CONTACT OPTIONS





mber of Ways			wire Gauge Size			
No of Ways	Details		Code	Accepted Wire Gauge		
1 Page 72			691	12 AWG Solid or Stranded		
		'	601	14 AWG Solid or Stranded		
			612	16 AWG Solid or Stranded		
			622	18 AWG Solid or Stranded		





HOW TO ORDER - CAP OPTIONS






6XX

6XX






XX


SINGLE THRU HOLE IDC CONTACT 12-18 AWG: 9177-600

Contact Details




70-9177-001-6XX-006 CONTACT DETAILS

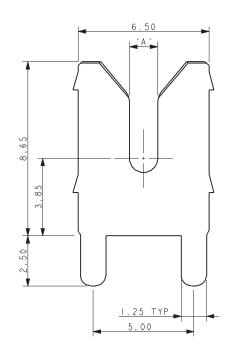



PCB LAYOUT FOR CONTACT

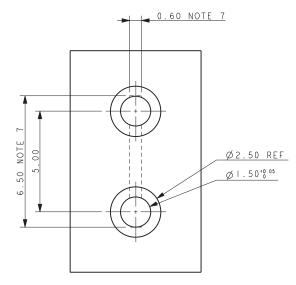

Code	Accepted Wire Gauge	Α
691	12 AWG Solid or Stranded	1.50
601	14 AWG Solid or Stranded	1.10
612	16 AWG Solid or Stranded	0.82
622	18 AWG Solid or Stranded	0.72


NOTES:


- 1. IDC CONTACT OT ACCEPT WIRES FROM 12 AWG TO 18 AWG.
- 2. MATERIAL: PHOSPHOR BRONZE.
- 3. PLATING PURE TIN OVER NICKEL.
- 4. ALL DIMENSIONS ±0.20 UNLESS SPECIFIED.
- 5. PACKING IN BAGS, 800 PIECES PER BAG.
- 6. PRODUCT SPECIFICATION REFER TO 201-01-141.
- 7. OUTLINE OF CONTACT SEE PAGE 71 FOR ADDITIONAL CLEARANCE REQUIRED FOR WIRE INSERTION TOOL.
- 8. FOR ASSEMBLY DETAILS REFER TO APPLICATION NOTES 201-01-142.



ASSEMBLY TOOLING

Part Number	Wire Insulation	Α
06-9177-7021-01-000	Ø 3.50 - 4.25	4.25
06-9177-7021-02-000	Ø 3.50 - 4.50	3.50
06-9177-7021-03-000	Ø 3.50 - 2.75	275

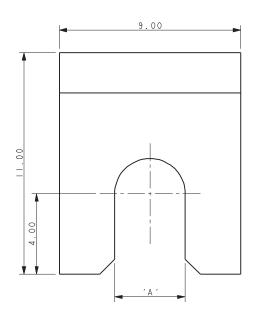


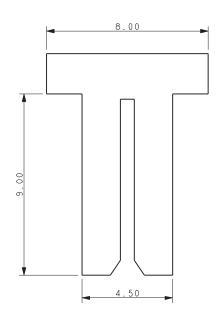

NOTES

- 1. WIRE INSERTION TOOL 06-9177-7021-0X-000, FULL PART NUMBER REFER TO TABLE.
- 2. TOOL PART NUMBER DEPENDENT ON WIRE INSULATION DIAMETER NOT WIRE GAUGE OR CONTACT NUMBER.
- 3. ASSEMBLY DETAILS REFER TO APPLICATION NOTES 201-01-142
- 4. MATERIAL: TOOL STEEL.
- 5. APACE REQUIRED ON PCB FOR TOO. NO COMPONENTS IN THIS AREA.


PCB CLEARANCE AREA FOR TOOL

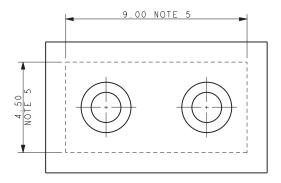



Accessory Cap - Through Wire



60-9177-001-6XX-X00 1 WAY WIRE THROUGH CAP DETAILS

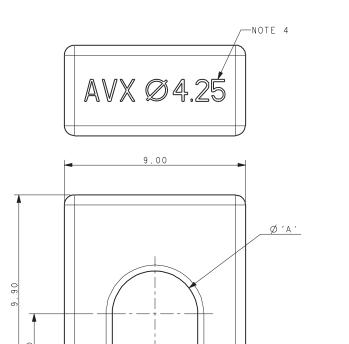






Code page 71	Diameter A	Text Note 4
627	2.75	1.50
635	3.50	1.10
642	4.25	0.82


NOTES:


- 1. CAP FOR IDC WIRE TO BOARD CONNECTION, 1 WAY WITH THROUGH WIRE.
- 2. WIRE THROUGH CAP FOR ASSEMBLY AT ANY POSITION ON A WIRE.
- 3. CAP MATERIAL: GLASS FILLED NYLON 46, UL94 V-0. COLOR SEE PAGE 71.
- CAP DESIGNED TO ACCOMMODATE WIRE INSULTATION. DIAMETERS 2.10MM TO 2.75MM, 2.75MM TO 3.50MM AND 3.50MM TO 4.25MM.
- 5. ALL DIMENSIONS ±0.20 UNLESS STATED.
- 6. PACKED IN BAGS, QUANTITY 800 PIECES PER BAG.
- 7. PRODUCT SPECIFICATION REFER TO 201-01-141.
- 8. FOR ASSEMBLY DETAILS REFER TO APPLICATION NOTES 201-01-142.




60-9177-001-6XX-X99 1 WAY WIRE STOP CAP DETAILS

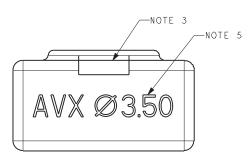

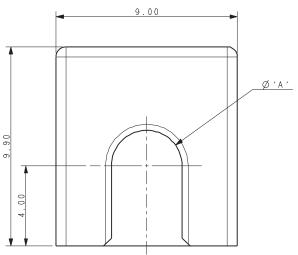



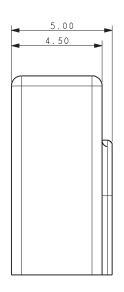

Code page 71	Diameter A	Text Note 4
627	2.75	2.75
635	3.50	3.50
642	4.25	4.25

NOTES:

- 1. CCAP FOR IDC WIRE TO BOARD CONNECTION, 1 WAY WITH WIRE STOP.
- 2. WIRE STOP FOR USE AT END OF WIRE.
- 3. SLOT TO CHECK WIRE POSITION BEFORE ASSEMBLY.
- 4. CAP MATERIAL: GLASS FILLED NYLON 46, UL94 V-0. COLOR SEE PAGE 71.
- CAP DESIGNED TO ACCOMMODATE WIRE INSULTATION. DIAMETERS 2.10MM TO 2.75MM, 2.75MM TO 3.50MM AND 3.50MM TO 4.25MM.
- 6. ALL DIMENSIONS ±0.20 UNLESS STATED.
- 7. PACKED IN BAGS, QUANTITY 800 PIECES PER BAG.
- 8. PRODUCT SPECIFICATION REFER TO 201-01-141.
- 9. FOR ASSEMBLY DETAILS REFER TO APPLICATION NOTES 201-01-142.

General Information





The new 9276 series connector provides a guick and reliable wire-to-board termination in a sleek 2.5mm pitch SMT package for a broad range of industrial and commercial markets. With almost every product on the market today having to deal with a small number of discrete wires to connect components to a board, the 9276 series connectors meets this challenge by simply stripping the wire and inserting them into the connector. This makes the connector very termination friendly within the factory as well as in the field by electrical installers. Developed for harsh industrial and Solid State Lighting (SSL) applications, the connector was designed with a high spring force Beryllium Copper upper spring contact to accept a wide range (18-26 AWG solid or stranded) of wire to meet multiple applications with a single connector. By incorporating a dual-contact design we were able to maximize current rating (6 Amps) and minimize PCB space. For example, the 4p connector has a footprint of 90 sq-mm while competing products are 160 sq-mm. The dual-contact design also provides two solder points for each wire eliminating the need for external anchor tabs. AVX provides a small insertion / extraction tool which will allow the wires to easily be replaced up to 5 times.

APPLICATIONS

- · Connecting discrete wire components directly to the PCB
- · Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- Application notes: refer to 201-01-127

FEATURES AND BENEFITS

- Simple strip, insert and removal design
- SMT RoHS termination to the PCB with minimal footprint
- Accepts 18-26 AWG Solid and Stranded wires
- Expanded size offering to maximize application potential; 1, 2, 3, 4, 6 & 8 positions
- High spring force top contact provides a lance type retention to capture and retain the wire
- Available in standard white and optional black color

ELECTRICAL

- Current Rating: 6 Amps / Contact
- Voltage Rating: 300 VAC


ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C

MECHANICAL

- · Insulator Material: Glass-Filled Nylon 46; UL94V0
- Contact Material: Beryllium Copper / **Phosphor Bronze**
- Plating: Tin over Nickel
- · Replaceability: 5 Cycles

HOW TO ORDER



Number of Ways						
Code	No of Ways	Details				
001	1	Page 78				
002	2	Page 79				
003	3	Page 80				
004	4	Page 81				
006	6	Page 82				
800	8	Page 83				

00X







Code	Accepted Wire Gauge	Max Conductor	Max Insulatio	
21	18-26 AWG	1.20mm	2.10mm	
	Solid or Standed	Diameter	Diamete	



Insulator Color 9 = UL White 8 = UL Black





Thin Blade Removal Tool Part Number 06-9276-7001-01-000

Certification: UL File #E90723




Wire Assembly/Wire Extraction



WIRE ASSEMBLY FOR FURTHER DETAILS REFER TO APPLICATION NOTES 201-01-127




TRIM INSULATION.
DO NOT CRUSH CENTER OF WIRE.
STRANDED WIRES TWISTED TOGETHER BEFORE INSERTION.
CHECK ALL STANDS OF WIRE ARE CORRECTLY ALIGNED
AFTER THE INSULATION IS REMOVED.

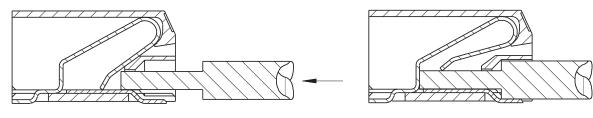

PUSH WIRE INTO HOLE IN FRONT OF CONNECTOR DO NOT BEND CONNECTOR

CONTINUED TO PUSH WIRE UNTIL STOP IS REACHED.

WIRE EXTRACTION

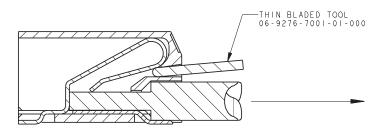


PUSH BLADE (NOT SHARP) INTO SLOT ABOVE WIRE. WHEN WIRE IS FREE, PULL TO EXTRACT.


1 Position




1 WAY WIRE TO BOARD CONNECTOR



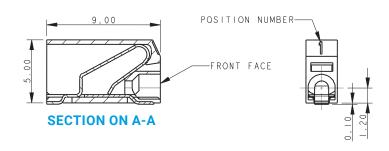





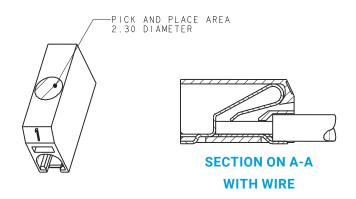


NOTES:

- 1. 9276 ONE WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

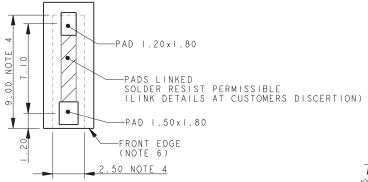






POKE-HOME: HORIZONTAL


18-26 AWG: 00-9276


2 Position




2 WAY WIRE TO BOARD CONNECTOR



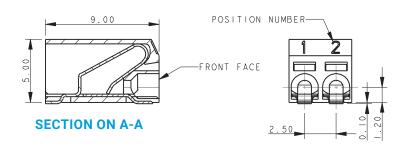




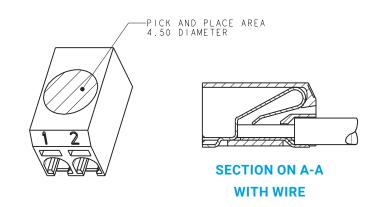

PACKING DETAILS

NOTES:


- 1. 9276 TWO WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

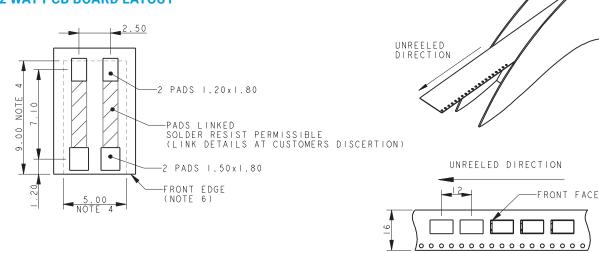



3 Position




3 WAY WIRE TO BOARD CONNECTOR



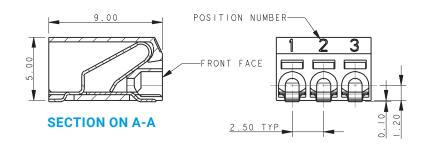




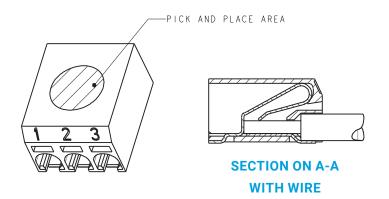

PACKING DETAILS

NOTES:


- 1. 9276 THREE WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

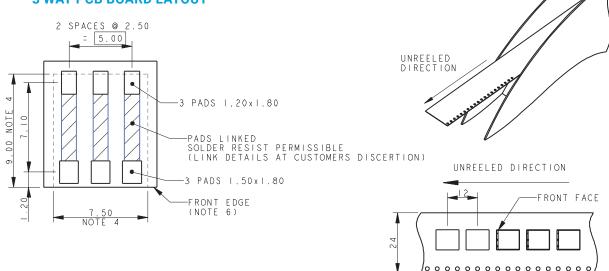


4 Position




4 WAY WIRE TO BOARD CONNECTOR

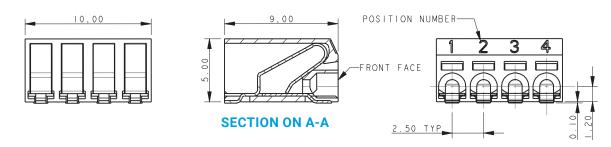


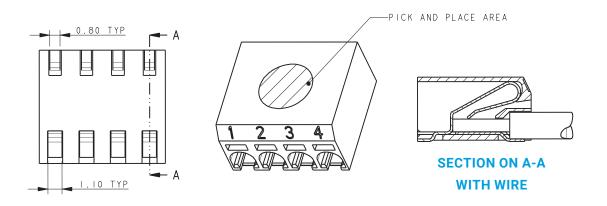

NOTES:

- 9276 FOUR WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

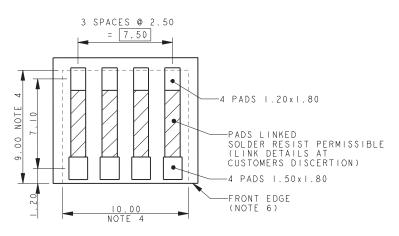

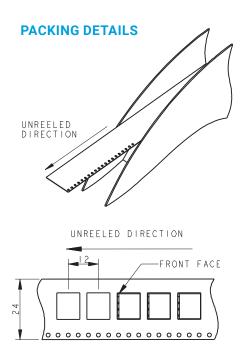





6 Position



6 WAY WIRE TO BOARD CONNECTOR

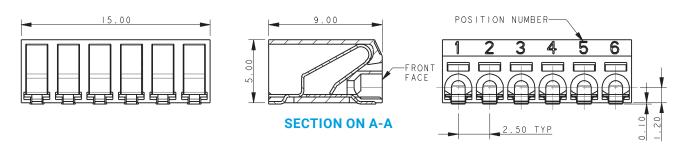


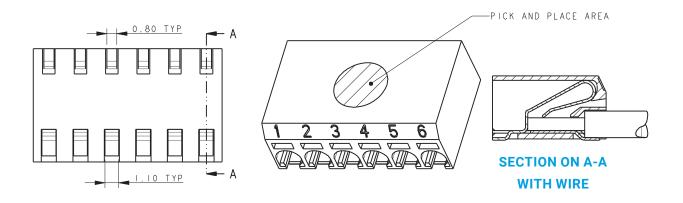


NOTES:

- 9276 SIX WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

6 WAY PCB BOARD LAYOUT

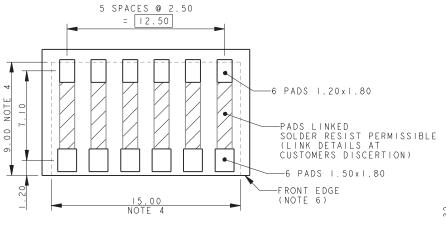

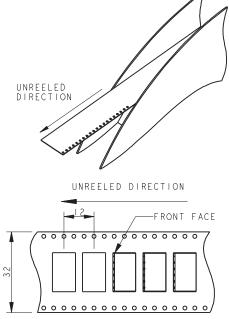


POKE-HOME: HORIZONTAL

18-26 AWG: 00-9276

8 Position





8 WAY WIRE TO BOARD CONNECTOR

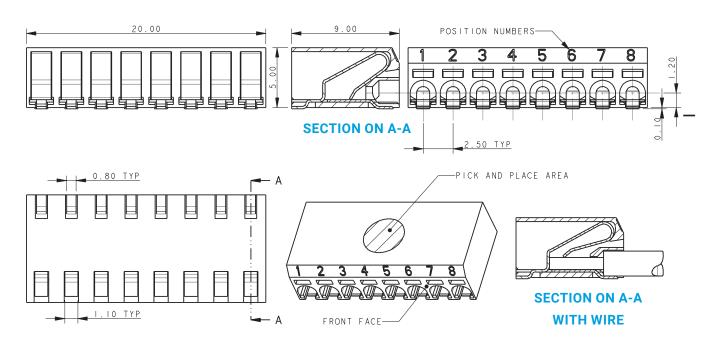


NOTES:

- 1. 9276 EIGHT WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

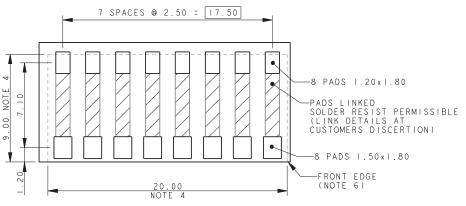





12-28 AWG: 70-9296

General Information





The widespread market adaptation of the AVX STRIPT™ contact systems continue to drive new product developments. The 70-9296 series of dual beam, boxed contacts provide a simple, yet reliable wire-to-board alternative to full sized 1pc and 2pc connector solutions. Contacts are SMT onto the PCB, then either solid or stranded wires can be stripped to length and inserted into the contact. Contacts are designed with dual beam high force contacts to maximize wire retention. Integral wire guides and stop assures proper positioning of the wire.

In this round of product expansion, the 2.5mm has been added to offer a new size when trying to maximize AWG and keep the smallest profile contact available is size critical applications. Additionally, this contact has been designed without a wire stop to facilitate solid pin insertion capabilities for board-to-board and module-to-module applications (see BTB Jumper data sheet for 109296001xxx906).

APPLICATIONS

- · Industrial/Ruggedized Wire-to-Board applications
- Replace hard soldering of wire to a PCB
- Reference Product Specification 201-01-143
- · Reference Application Notes 201-01-150
- · Linear Board-to-Board capabilities with 109296001xxx906 jumpers

ELECTRICAL

- Voltage Rating: 300V
 Based on placement distance
- Current Rating: See Matrix Below

ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C

003

004

3mm Contact

4mm Contact

FEATURES AND BENEFITS

- Dual Beam box contact provides maximum mechanical stability and wire retention
- · Tape and reel packaged for automated SMT placement
- Staged current rating based on AWG, maximum is 10A (12AWG)
- 2.5mm w/o wire stop allows for variable PCB mating tolerances in linear BTB applications

MECHANICAL

- · Contact Material: Phosphor Bronze
- · Contact Plating: Pure Tin


2 5mm Ø

3.4mm Ø

· Durability 5 Cycles

HOW TO ORDER



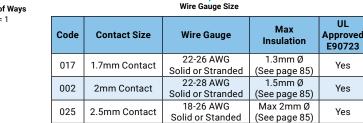



Yes

Yes

Code	Wire Stop Variations	Plating
006	With wire stop	Pure tin all
016*	Without wire stop	over

*2mm, 2.5mm, and 3mm contact only



CURRENT RATING

Size	Part Number	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG	24AWG	26AWG	28AWG
4mm	709296001004006	20A	16A	14A	12A	10A				
3mm	7092960010030x6				15A	14A	10A	9A	7A	
2.5mm	7092960010250x6				14A	12A	11A	9A	7A	
2mm	709296001002006						11A	9A	7A	6A
1.7mm	709296001017006						11A	9A	7A	6A

18-26 AWG

Solid or Stranded 12-20 AWG


Solid or Stranded

12-28 AWG: 70-9296

1.7mm




70-9296-001-017-006 1.7MM POKE HOME CONTACT

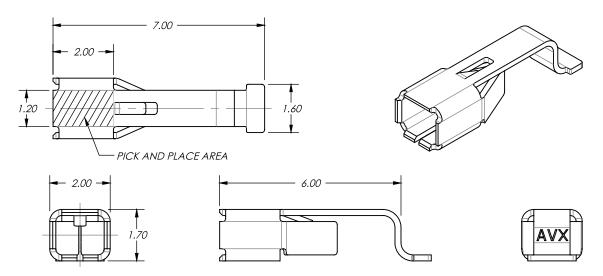


NOTES:

- FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 4000 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 91.
- 5. AREA AVAILABLE FOR PICK AND PLACE.
- 6. UL REFERENCE 90723.
- 7. GENERAL TOLERANCE ±0.10.

SUGGESTED PCB LAYOUT

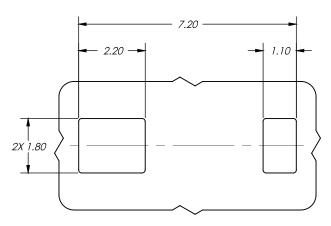

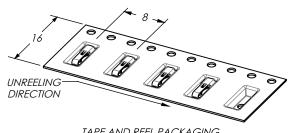

TAPE AND REEL PACKAGING QUANTITY PER REEL: 4,000





12-28 AWG: 70-9296

2mm



70-9296-001-002-006 2MM POKE HOME CONTACT

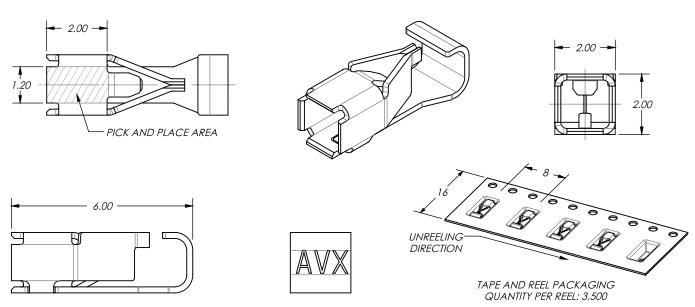


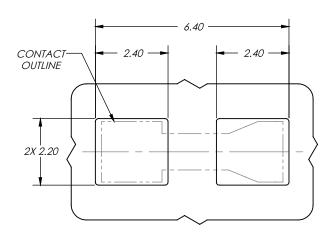

12-28 AWG: 70-9296

2.5mm




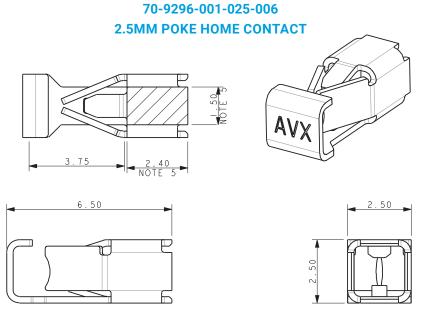



NOTES:

- FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 2500 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 91.
- 5. AREA AVAILABLE FOR PICK AND PLACE.
- 6. UL REFERENCE 90723.
- 7. GENERAL TOLERANCE ±0.10.

SUGGESTED PCB LAYOUT

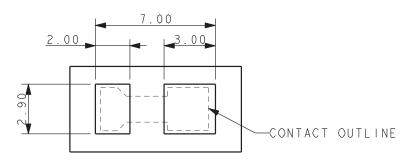

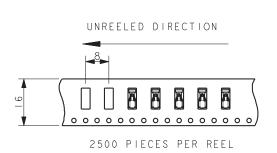

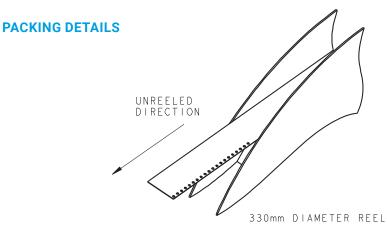


12-28 AWG: 70-9296

2.5mm - No Stop




70-9296-001-025-016 2.5MM POKE HOME CONTACT – NO STOP

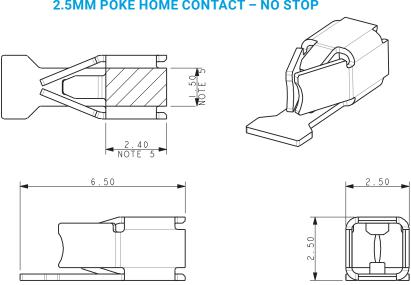



NOTES:

- FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 2500 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 91.
- 5. AREA AVAILABLE FOR PICK AND PLACE.
- 6. UL REFERENCE 90723.
- 7. GENERAL TOLERANCE ±0.10.

SUGGESTED PCB LAYOUT

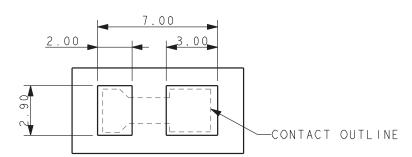

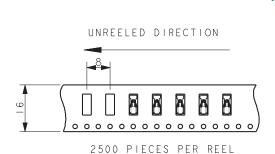


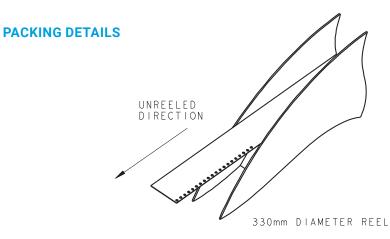

12-28 AWG: 70-9296

3mm




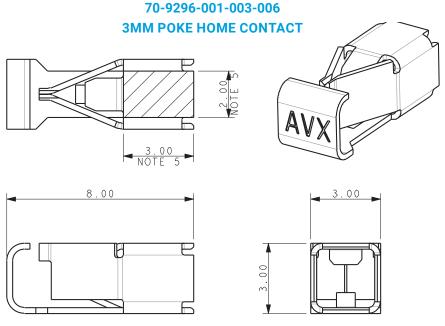

NOTES:

- 1. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 2500 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 91.
- 5. AREA AVAILABLE FOR PICK AND PLACE.
- 6. UL REFERENCE 90723.
- 7. GENERAL TOLERANCE ±0.10.


SUGGESTED PCB LAYOUT

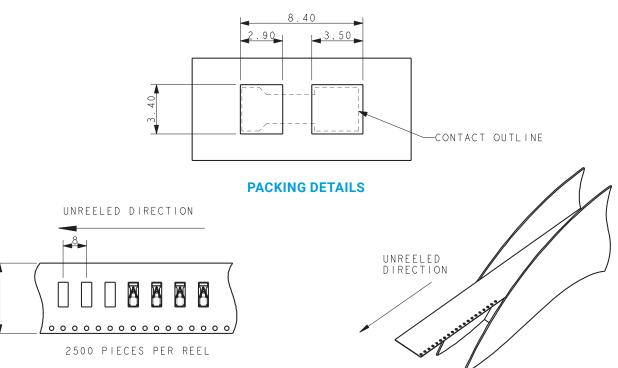

330mm DIAMETER REEL

4mm




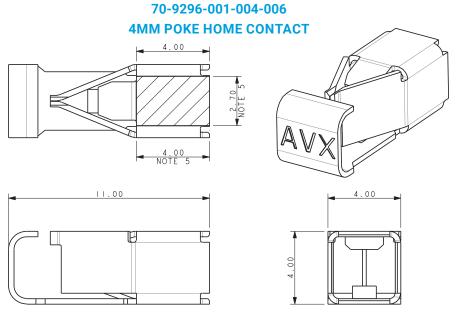

NOTES:

- 1. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 2000 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 91.
- 5. AREA AVAILABLE FOR PICK AND PLACE.
- 6. UL REFERENCE 90723.
- 7. GENERAL TOLERANCE ±0.10.

SUGGESTED PCB LAYOUT

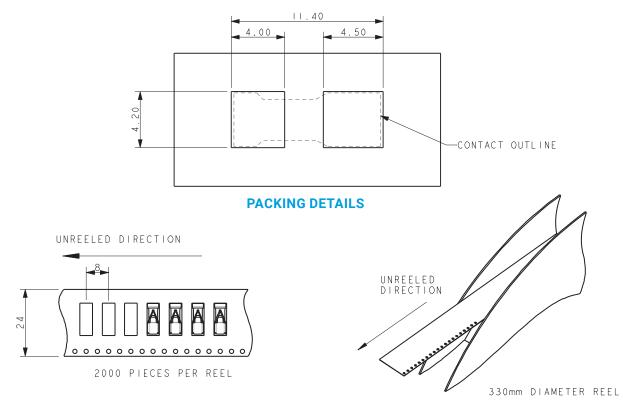


12-28 AWG: 70-9296

Connector Assembly / Contact Opening Tool



CONNECTOR ASSEMBLY


FOR FULL DETAILS REFER TO APPLICATION NOTES 201-01-150

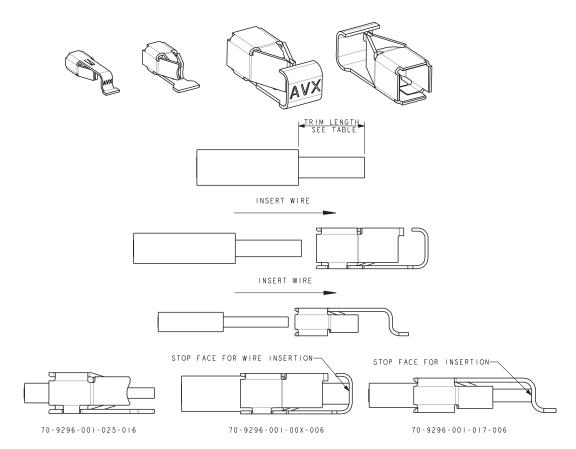

CONTACT	WIRE SIZE	INSULATOR DIAMETER	TRIM LENGTH
70-9296-001-004-006	296-001-004-006 12AWG and 14AWG		6.5 ± 0.5mm
70-9296-001-004-006	16AWG, 18AWG and 20AWG	Max 2.5mm	5.5 ± 0.5mm
70-9296-001-003-006	18AWG to 26AWG	Max 2.5mm	4.5 ± 0.5mm
70-9296-001-025-006	20AWG to 26AWG	Max 2.0mm	3.5 ± 0.5mm
70-9296-001-025-006	20AWG to 26AWG	2.0mm to 2.50mm	6.0 ± 0.5mm*
70-9296-001-025-016	20AWG to 26AWG	Max 2.0mm	3.0mm Minimum – No Stop on Contact
70-9296-001-025-016	20AWG to 26AWG	Max 2.0mm	5.5mm Minimum – No Stop on Contact
70-9296-001-002-006	22AWG to 28AWG	Max 1.5mm	3.5 ± 0.5mm
70-9296-001-002-006	22AWG to 28AWG	1.5mm to 2.0mm	5.5 ± 0.5mm*
70-9296-001-017-006	22AWG to 26AWG	Max 1.3mm	4.0 ± 0.5mm
70-9296-001-017-006	22AWG to 26AWG	1.3mm to 1.7mm	6.0 ± 0.5mm*

^{*} Wire insulation butts on end of contact

CONTACT OPENING TOOL 06-9296-7001-01-000



TOOL TO OPEN THE CONTACT TO INSERT/WITHDRAW WIRE. REFER TO APPLICATION NOTES 201-01-150.



18-26 AWG: 00-9296

General Information





AVX continues to develop innovative connectors for the industrial electronics market that provide significant benefits over existing, outdated connector solutions. Listening to the design engineering community, there are ongoing applications where they cannot find an off-the-shelf solution that will satisfy a high percentage of the projects configuration, performance and cost goals.

The newest addition to AVX's broadening line of Wire-to-Board (WTB) connectors offers a cost effective, single Poke-Home connector solution that will meet the cost and performance targets in demanding, yet user friendly applications. At the heart of the connector is the industry proven dual tine, 3mm high spring force box contact that has been on the market as a standalone horizontal contact only solution.

The new SMT vertical top entry connector allows for 18AWG to 26AWG wires to be simply stripped and inserted into the connector body at 180 degree orientation to the top side of the PCB. This single connector will replace existing 2-Piece WTB solutions where a header is soldered onto the PCB and a secondary crimp-to-wire receptacle assembly is plugged in. Available in 1-6 positions, each connector will accept the entire wire gauge range for either solid or stranded wires at varying current ratings supported by each wire size. Once inserted, wires can easily be removed or replaced by twisting/unscrewing or by using a small blade extraction tool.

APPLICATIONS

- · Industrial/Ruggedized Wire-to-Board applications
- Replace hard soldering of wire to a PCB
- Replace costly 2-Piece header and receptacle products
- Reference Product Specification 201-01-151
- Reference Application Notes 201-01-152

FEATURES AND BENEFITS

- · Dual Beam box contact provides maximum mechanical stability and wire retention
- Tape and reel packaged for automated SMT placement
- Will accept either solid or stranded wire, 18-26AWG, plated or un-plated
- Simple strip and insert for wire loading, with easy twist and pull for wire removal

ELECTRICAL

Voltage Rating: 600 VAC 1 way; 300 VAC 2 - 6 way

Current Rating: See matrix below

ENVIRONMENTAL

Operating Temperature: -40°C to +125°C


MECHANICAL


- · Contact Material: Copper Alloy
- Contact Plating: Tin over Nickel

06

Durability: 5 Cycles

HOW TO ORDER











One Way Only (Special Order) 2 = UL Brown 3 = UL Blue 4 = UL Yellow 5 = UL Red 6 = UL Green

7 = UL Orange

CURRENT RATING


18AWG	20AWG	22AWG	24AWG	26AWG
7A	6A	5A	4A	3A

Certification: UL File #E90723


1 Position



9296 TOP MOUNT POKE HOME CONNECTOR 1 WAY






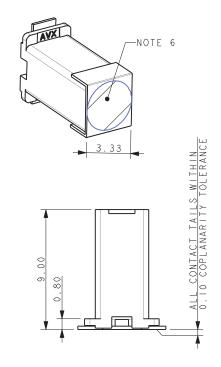


NOTES:

- 1. TOP MOUNT 1 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 92.
- 4. CONTACT: TIN PLATE COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL. QTY PER REEL 400, 330MM REEL.
- 6. CAPTON TAPE TO AID PICK AND PLACE, 4MM DIAMETER MAX AVAILABLE.
- 7. CONNECTOR OUTLINE.
- 8. GENERAL TOLERANCE ±0.20.
- 9. UL REFERENCE E90723.

SUGGESTED PCB LAYOUT

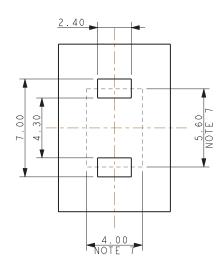

PACKING DETAILS

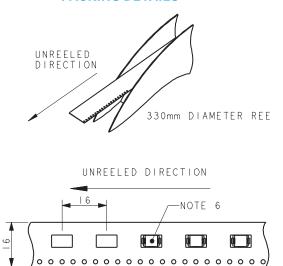

QUANTITY PER REEL 400





POSITION

2 Position





9296 TOP MOUNT POKE HOME CONNECTOR 2 WAY

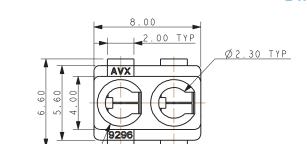



4.00

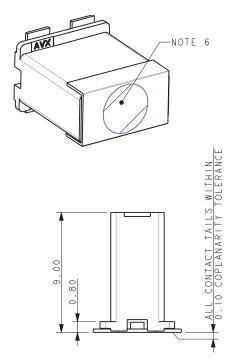





NOTES:

- 1. TOP MOUNT 2 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 92.
- 4. CONTACT: TIN PLATE COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL. QTY PER REEL 400, 330MM REEL.
- 6. CAPTON TAPE TO AID PICK AND PLACE, 4MM DIAMETER MAX AVAILABLE.
- 7. CONNECTOR OUTLINE.
- 8. GENERAL TOLERANCE ± 0.20 .
- 9. UL REFERENCE E90723.

PACKING DETAILS

SUGGESTED PCB LAYOUT

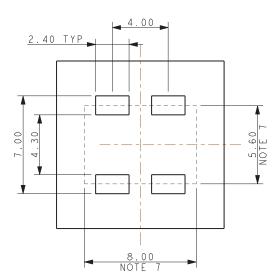

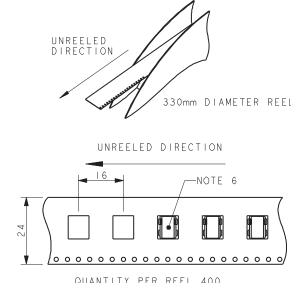



18-26 AWG: 00-9296


3 Position



9296 TOP MOUNT POKE HOME CONNECTOR 3 WAY

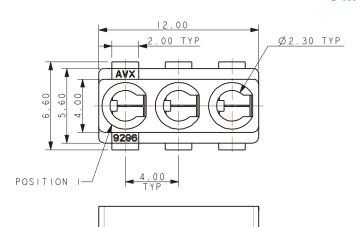

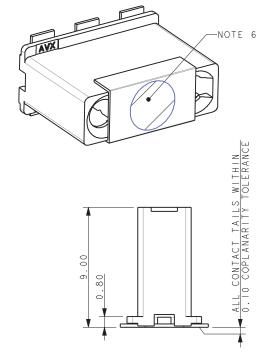





NOTES:

- 1. TOP MOUNT 3 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 92.
- 4. CONTACT: TIN PLATE COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL. QTY PER REEL 400, 330MM REEL.
- 6. CAPTON TAPE TO AID PICK AND PLACE, 4MM DIAMETER MAX AVAILABLE.
- 7. CONNECTOR OUTLINE.
- 8. GENERAL TOLERANCE ±0.20.
- 9. UL REFERENCE E90723.

SUGGESTED PCB LAYOUT

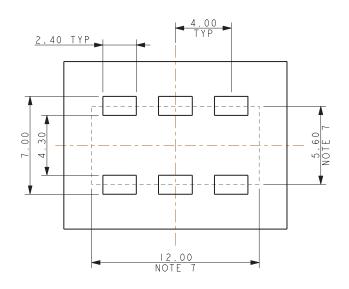

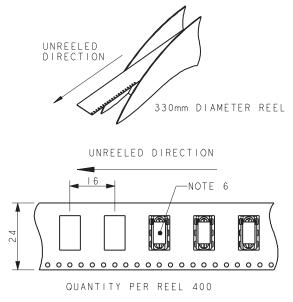


18-26 AWG: 00-9296


4 Position




9296 TOP MOUNT POKE HOME CONNECTOR

4 WAY

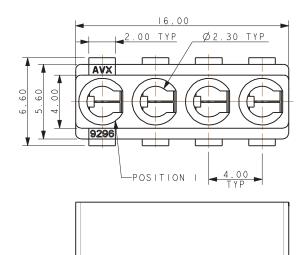

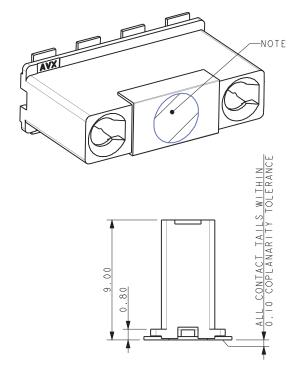

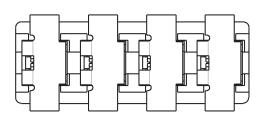



NOTES:

- 1. TOP MOUNT 4 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 92.
- 4. CONTACT: TIN PLATE COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL. QTY PER REEL 400, 330MM REEL.
- 6. CAPTON TAPE TO AID PICK AND PLACE, 4MM DIAMETER MAX AVAILABLE.
- 7. CONNECTOR OUTLINE.
- 8. GENERAL TOLERANCE ±0.20.
- 9. UL REFERENCE E90723.

SUGGESTED PCB LAYOUT

2.40 TYP 00 TYP 16.00 NOTE 7

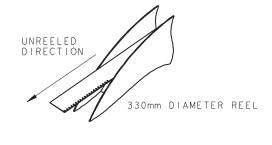

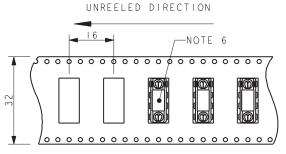


18-26 AWG: 00-9296


5 Position




9296 TOP MOUNT POKE HOME CONNECTOR

5 WAY

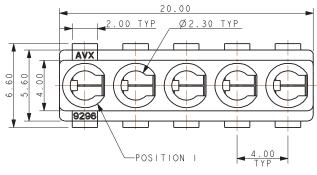

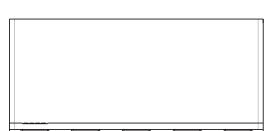

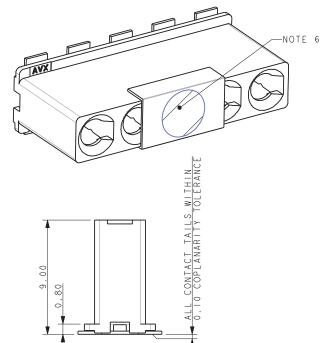


NOTES:

- 1. TOP MOUNT 5 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 92.
- 4. CONTACT: TIN PLATE COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL. QTY PER REEL 400, 330MM REEL.
- 6. CAPTON TAPE TO AID PICK AND PLACE, 4MM DIAMETER MAX AVAILABLE.
- 7. CONNECTOR OUTLINE.
- 8. GENERAL TOLERANCE ±0.20.
- 9. UL REFERENCE E90723.

SUGGESTED PCB LAYOUT

2.40 TYP 2.40 TYP 20.00 NOTE 7

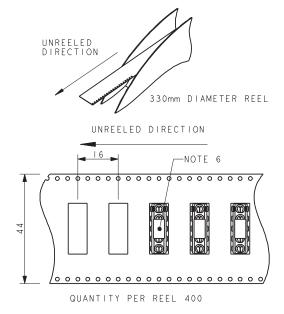





6 Position





9296 TOP MOUNT POKE HOME CONNECTOR

6 WAY

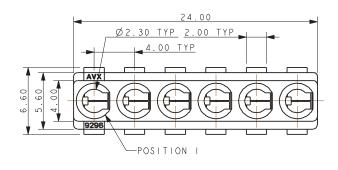

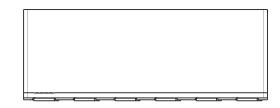

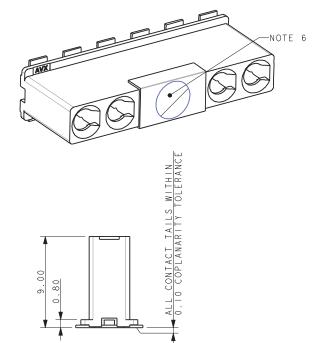





NOTES:

- 1. TOP MOUNT 6 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 92.
- 4. CONTACT: TIN PLATE COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL. QTY PER REEL 400, 330MM REEL.
- 6. CAPTON TAPE TO AID PICK AND PLACE, 4MM DIAMETER MAX AVAILABLE.
- 7. CONNECTOR OUTLINE.
- 8. GENERAL TOLERANCE ±0.20.
- 9. UL REFERENCE E90723.

SUGGESTED PCB LAYOUT

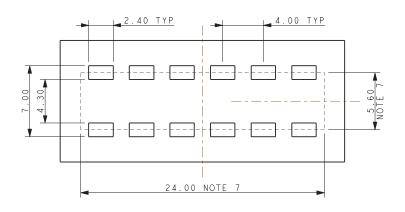

PACKING DETAILS

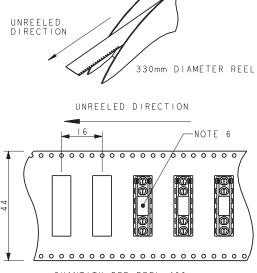

QUANTITY PER REEL 400




18-26 AWG: 00-9296


Connector Assembly / Contact Opening Tool



9296 TOP MOUNT POKE HOME CONNECTOR ASSEMBLY




WIRE STRIP LENGTH

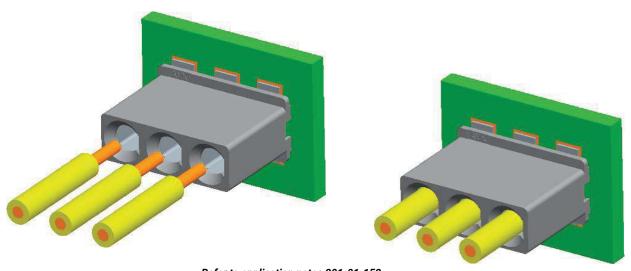

Refer to application notes 201-01-152 for full assembly procedure.

9296 TOP MOUNT POKE HOME CONNECTOR WIRE EXTRACTION TOOL

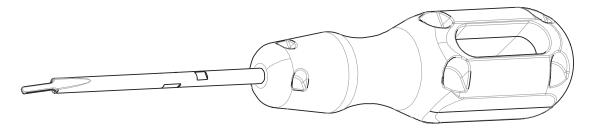

06-9296-7003-01-000

Refer to application notes 201-01-152 for full wire extraction procedure.

POKE-HOME: INVERTED THRU BOARD

18-26 AWG: 00-9296

General Information





AVX continues to develop innovative connectors for the industrial electronics market that provide significant benefits over existing, outdated connector solutions. Listening to the design engineering community, there are ongoing applications where they cannot find an off-the-shelf solution that will satisfy a high percentage of the projects configuration, performance and cost goals.

The newest addition to AVX's broadening line of Wire-to-Board (WTB) connectors offers a cost effective, single Poke-Home connector solution that will meet the cost and performance targets in demanding, yet user friendly applications. At the heart of the connector is the industry proven dual tine, 3mm high spring force box contact that has been on the market as a standalone horizontal contact only solution.

The new SMT vertical through board connector allows for 18AWG to 26AWG wires to be simply stripped and inserted into the connector body at 180 degree orientation to the bottom side of the PCB with an above board height of 0.80mm. This single connector will replace existing 2-Piece WTB solutions where a header is soldered onto the PCB and a secondary crimp-to-wire receptacle assembly is plugged in. Available in 1-6 positions, each connector will accept the entire wire gauge range for either solid or stranded wires at varying current ratings supported by each wire size. Once inserted, wires can easily be removed or replaced by twisting/unscrewing or by using a small blade extraction tool.

APPLICATIONS

- · Industrial/Ruggedized Wire-to-Board applications
- · Replace hard soldering of wire to a PCB
- Replace costly 2-Piece header and receptacle products
- Reference Product Specification 201-01-151
- Reference Application Notes 201-01-152

FEATURES AND BENEFITS

- Dual Beam box contact provides maximum mechanical stability and wire retention
- Tape and reel packaged for automated SMT placement
- Will accept either solid or stranded wire, 18-26AWG, plated or un-plated wires
- Simple strip and insert for wire loading, with easy twist and pull for wire removal

ELECTRICAL

Voltage Rating: 600 VAC 1 way; 300 VAC 2 - 6 way

Current Rating: See matrix below

ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C

MECHANICAL

- · Contact Material: Copper Alloy
- · Contact Plating: Tin over Nickel


06


Options

06 = Tin Plated

· Durability: 5 Cycles

HOW TO ORDER





503







CURRENT RATING


18AWG	20AWG	22AWG	24AWG	26AWG
7A	6A	5A	4A	3A

Certification: UL File #E90723

1 Position





9296 THROUGH BOARD MOUNT POKE HOME CONNECTOR 1 WAY







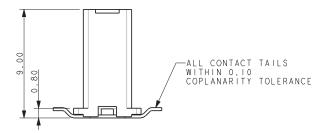




NOTES:


- 1. THROUGH BOARD SMT MOUNT 1 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 100.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY. PER REEL 400, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. CLEARANCE HOLE FOR CONNECTOR.
- 8. UL REFERENCE E90723.

PACKING DETAILS

4.60 MIN NOTE 7

SUGGESTED PCB LAYOUT








2 Position




9296 THROUGH BOARD MOUNT POKE HOME CONNECTOR 2 WAY

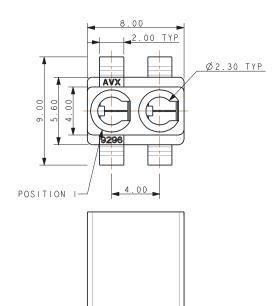



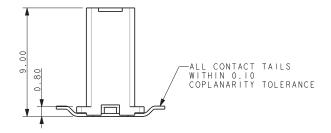





NOTES:

- THROUGH BOARD SMT MOUNT 2 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 100.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY. PER REEL 400, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. CLEARANCE HOLE FOR CONNECTOR.
- 8. UL REFERENCE E90723.

PACKING DETAILS

SUGGESTED PCB LAYOUT

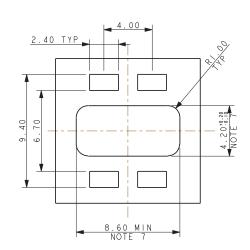

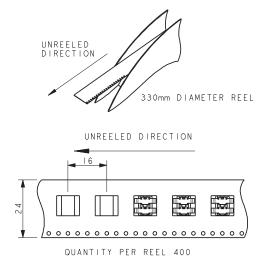


POKE-HOME: INVERTED THRU BOARD


18-26 AWG: 00-9296

3 Position





9296 THROUGH BOARD MOUNT POKE HOME CONNECTOR 3 WAY

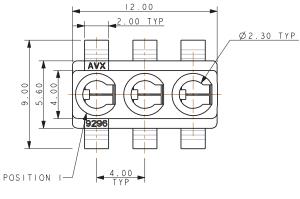





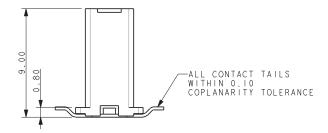





NOTES:

- 1. THROUGH BOARD SMT MOUNT 3 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 100.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY. PER REEL 400, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. CLEARANCE HOLE FOR CONNECTOR.
- 8. UL REFERENCE E90723.

SUGGESTED PCB LAYOUT

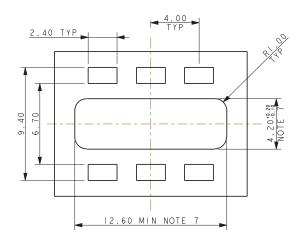


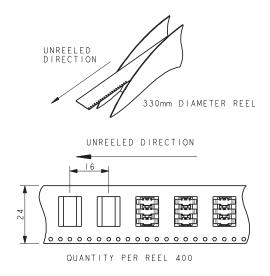


4 Position





9296 THROUGH BOARD MOUNT POKE HOME CONNECTOR 4 WAY

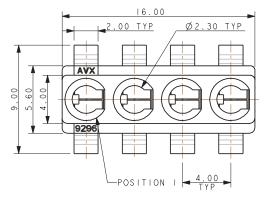

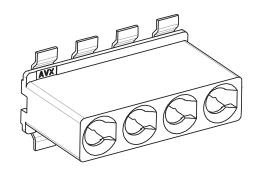



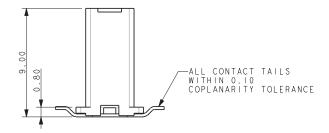





NOTES:

- 1. THROUGH BOARD SMT MOUNT 4 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 100.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY. PER REEL 400, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. CLEARANCE HOLE FOR CONNECTOR.
- 8. UL REFERENCE E90723.

PACKING DETAILS

SUGGESTED PCB LAYOUT

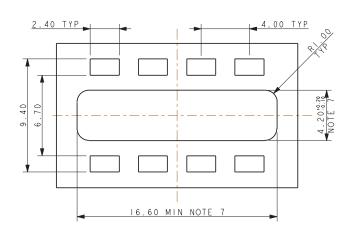

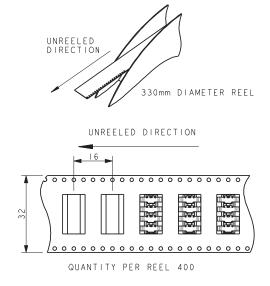


POKE-HOME: INVERTED THRU BOARD


18-26 AWG: 00-9296

5 Position



9296 THROUGH BOARD MOUNT POKE HOME CONNECTOR 5 WAY

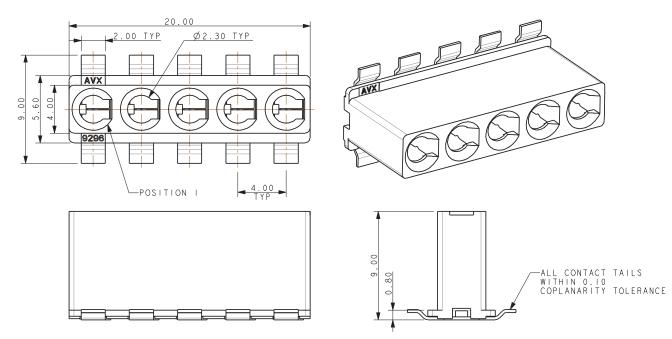




NOTES:

- 1. THROUGH BOARD SMT MOUNT 5 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 100.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY. PER REEL 400, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. CLEARANCE HOLE FOR CONNECTOR.
- 8. UL REFERENCE E90723.

PACKING DETAILS

2.40 TYP 4.00 TYP 0.00 TYP 20.60 MIN NOTE 7

SUGGESTED PCB LAYOUT

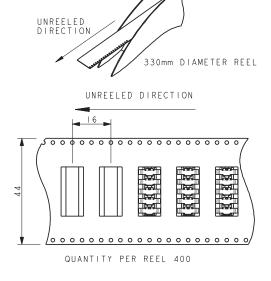


18-26 AWG: 00-9296


PICK AND PLACE 2.Imm DIAMETER

6 Position




9296 THROUGH BOARD MOUNT POKE HOME CONNECTOR 6 WAY

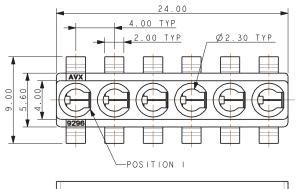

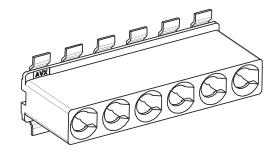



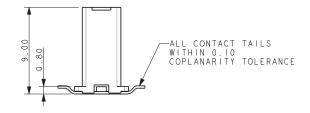



NOTES:


- 1. THROUGH BOARD SMT MOUNT 6 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-151 AND APPLICATION NOTES 201-01-152.
- 2. SUITABLE FOR WIRES 18AWG TO 26AWG. MAXIMUM INSULATION 2.20MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-0. COLOR REFER TO PAGE 100.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY. PER REEL 400, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. CLEARANCE HOLE FOR CONNECTOR.
- 8. UL REFERENCE E90723.

PACKING DETAILS

SUGGESTED PCB LAYOUT

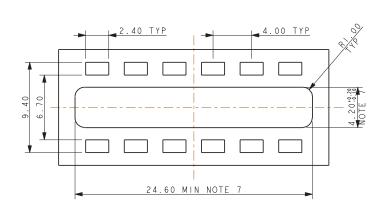

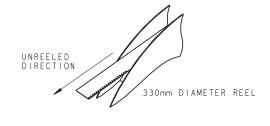

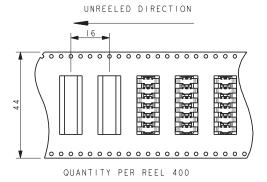


18-26 AWG: 00-9296


Wire Strip Length



9296 THROUGH BOARD MOUNT POKE HOME CONNECTOR ASSEMBLY

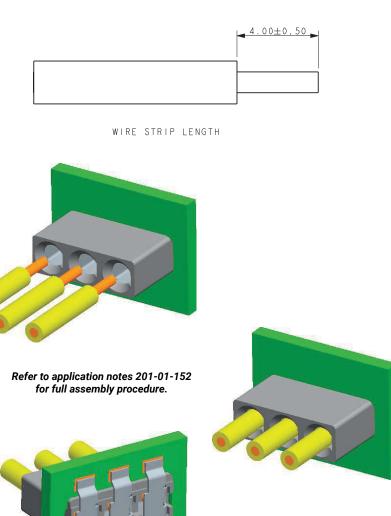

THROUGH BOARD MOUNT POKE HOME CONNECTOR WIRE EXTRACTION TOOL

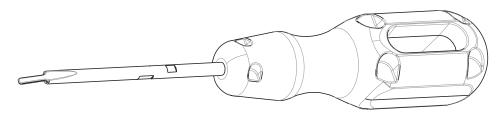

06-9296-7003-01-000 - PLASTIC TOOL 06-9296-7004-03-000 - METAL TOOL


Refer to application notes 201-01-152 for full wire extraction procedure.

SINGLE VERTICAL TOP ENTRY

AWG: 58-9296

General Information



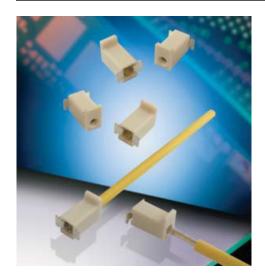

Vertical poke-home connectors were introduced into the market a few years ago to provide a reliable, yet cost effective discrete wire-to-board termination in perpendicular applications. Designed to bridge the gap between inconsistent hand soldering of wires and costly 2-piece connector systems, these connectors are available in a range of positions and configurations while accepting 18 to 26AWG solid or stranded wires.

This latest connector was developed specifically to support the high volume 18AWG wire applications used in power supply, LED driver and industrial control products where PCB space is limited. This new 9296 connector offers a robust single beam contact which securely captures and retains the wire in a 23% smaller package size.

APPLICATIONS

- Replace inconsistent hand soldered perpendicular wire terminations onto PCB's in:
 - Power Supplies
 - LED Drivers
 - Industrial/Motor Controls
- Offer a simple and cost reduced solution to existing 2-Piece connector systems

FEATURES AND BENEFITS

- Pre-Plated phosphor bronze contact material provides excellent spring performance with high fatigue and corrosion resistance
- The single stamped and formed box contact maximizes board attachment and wire capture strength
- Tight tolerance and wire insulation stop helps to prevent potting from flowing into the connector during encapsulation processes
- Integral molded in flange provides a generous vacuum pick-up point for automated SMT placement

ELECTRICAL

- · Current Rating: 8 Amps
- Voltage Rating: 600 VAC

ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C

MECHANICAL

- · Insulator Material: Glass-Filled Nylon 46, UL94V0
- Contact Material: Phosphor Bronze
- · Plating: Pure Tin
- Durability: 3 Cycles

HOW TO ORDER


589296001000014





SINGLE VERTICAL TOP ENTRY 18 AWG: 58-9296

Single Vertical Top Entry













PARTS IN POCKET TAPE SCALE 2.5:1



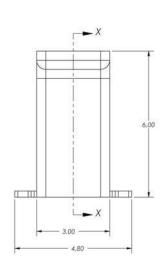



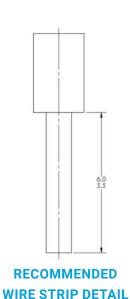

1.675 REF

2x 2.6

NOTES:

- 1. HOUSING MATERIAL: GLASS-FILLED, HIGH TEMP. THERMOPLASTIC; UL94V-0; COLOR: NATURAL.
- 2. CONTACT MATERIAL: HIGH STRENGTH PHOSPHORB BRONZE ALLOY; PRE-PLATED LEAD-FREE TIN OVER NICKEL PLATING.
- 3. PACKAGING: POCKET TAPE ON REELS; 1,250 PARTS PER REEL.

RECOMMENDED PCB LAYOUT

24 AWG: 70-9296

General Information





AVX continues to develop innovative connectors for the industrial electronics market that provide significant benefits over existing, outdated connector solutions. The latest release is single vertical Wire-to-Board (WTB) contacts that provide cost effective, yet robust discrete wire termination without the expense of an insulator and assembly costs. This new family of top and bottom entry contacts compliments the existing vertical poke home connectors already on the market, providing a lower cost solution without jeopardizing performance

The new contacts support both solid and stranded wires ranging from 24AWG down to 18AWG and current ratings as high as 12 amps. The set of four contacts provide both top and bottom entry for FR4 and metal core printed circuit boards.

APPLICATIONS

- Machine Controls: motors, drives, solenoids, sensors, fans and pumps
- · Commercial Buildings: controls, security, fire and sensors
- · Smart Grid: meters, breakers and panels
- · SSL/LED; bulbs, fixtures, signage and streetlights

FEATURES AND BENEFITS

- Dual Beam contact provides maximum mechanical stability and wire retention
- · Tape and reel packaged for automated SMT placement
- Staged current rating based on AWG, maximum is 12A (18AWG)
- Increased functionality with the single contact placement: multiple contacts and/or specific individual locations

ELECTRICAL

- Voltage Rating: 300V
 Based on placement distance
- Current Rating: See matrix below


ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C

MECHANICAL

- · Contact Material: Phosphor Bronze
- · Contact Plating: Pure Tin
- · Durability: 5 Cycles

HOW TO ORDER





Code	Contact Location	Wire Insertion Direction	Recommended For Board Type	Wire Gauges
103	Top Side	Bottom Entry	FR4	18 – 24 AWG
113	Through Board	Top Entry	FR4	18 – 24 AWG
123	Top Side	Bottom Entry	Metal Clad	18 – 24 AWG
133	Through Board	Top Entry	Metal Clad	18 – 24 AWG





CURRENT RATING

18AWG	20AWG	22AWG	24AWG
15A	14A	10A	9A


Certification: UL File #E90723

18-24 AWG: 70-9296


Top Side Contact - Bottom Entry Wire (FR4 Board)



70-9296-001-103-006 9296 VERTICAL MOUNT SMT CONTACT **TOP SIDE CONTACT - BOTTOM ENTRY WIRE (FR4 BOARD)**

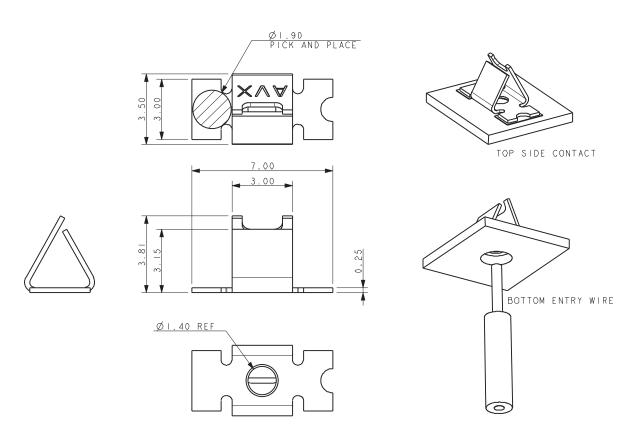


SUGGESTED PCB LAYOUT

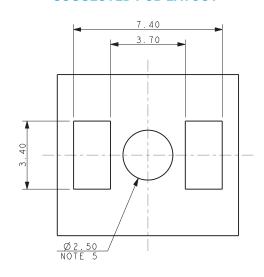

NOTES:

- 1. CONTACT MOUNTS ON TOP SIDE OF BOARD, WIRE INSERTED FROM UNDERSIDE OF BOARD.
- 2. STYLE RECOMMENDED FOR FR4 BOARDS WHERE MINIMUM CLEARANCE REQUIRED TO CONTACT AND MOUNTING PADS.
- 3. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-175.
- 4. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 5. HOLE FOR WIRE INSERTION.
- 6. PACING IN TAPE AND REEL. 2000 PIECES PER REEL.
- 7. FOR WIRE TRIM DETAILS REFER TO PAGE 115.
- 8. UL REFERENCE E90723.
- 9. GENERAL TOLERANCE ±0.10.

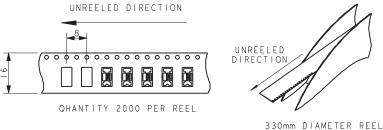





18-24 AWG: 70-9296

Through Board Contact - Top Entry Wire (FR4 Board)




70-9296-001-113-006 9296 VERTICAL MOUNT SMT CONTACT THROUGH BOARD CONTACT - TOP ENTRY WIRE (FR4 BOARD)

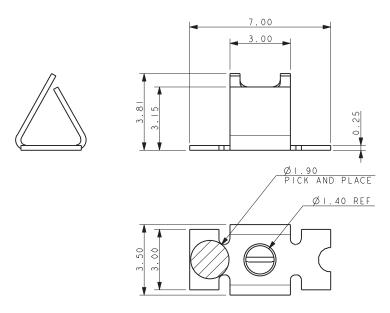




THROUGH BOARD CONTACT




SUGGESTED PCB LAYOUT

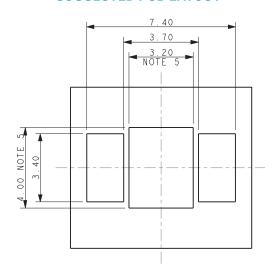

NOTES:

- 1. CONTACT MOUNTS THROUGH THE BOARD, WIRE INSERTED FROM TOP SIDE
- 2. OF BOARD.
- 3. STYLE RECOMMENDED FOR FR4 BOARDS WHERE MINIMUM CLEARANCE REQUIRED TO CONTACT AND MOUNTING PADS.
- 4. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-175.
- 5. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 6. HOLE DIMENSIONS FOR CONTACT.
- 7. PACING IN TAPE AND REEL, 2000 PIECES PER REEL.
- 8. FOR WIRE TRIM DETAILS REFER TO PAGE 115.
- 9. UL REFERENCE E90723.
- 10. GENERAL TOLERANCE ±0.10.

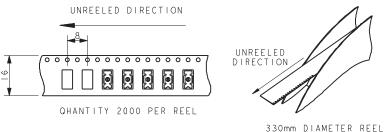


18-24 AWG: 70-9296


Top Side Contact - Bottom Entry Wire (Metal Board)



70-9296-001-123-006 9296 VERTICAL MOUNT SMT CONTACT TOP SIDE CONTACT – BOTTOM ENTRY WIRE (METAL BOARD)

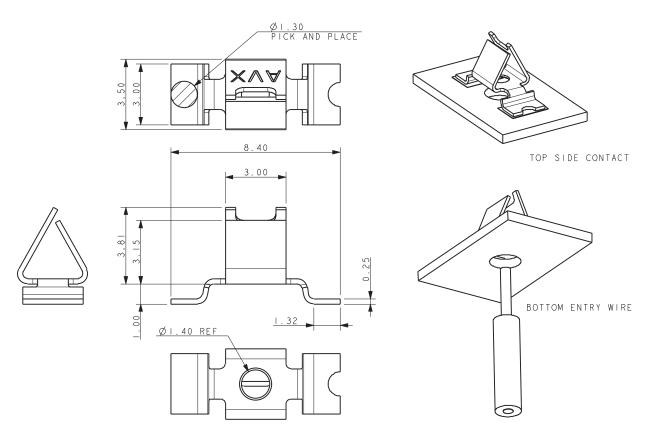


SUGGESTED PCB LAYOUT

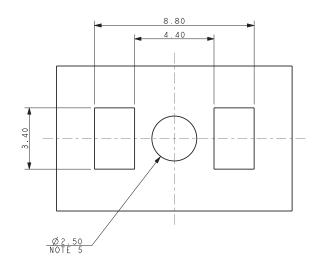

NOTES:

- CONTACT MOUNTS ON TOP SIDE OF BOARD, WIRE INSERTED FROM UNDERSIDE OF BOARD.
- STYLE RECOMMENDED FOR METAL CLAD BOARDS WHERE MAXIMUM CLEARANCE REQUIRED TO CONTACT AND MOUNTING PADS.
- 3. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-175.
- 4. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 5. HOLE FOR WIRE INSERTION.
- 6. PACING IN TAPE AND REEL, 1600 PIECES PER REEL.
- 7. FOR WIRE TRIM DETAILS REFER TO PAGE 115.
- 8. UL REFERENCE E90723.
- 9. GENERAL TOLERANCE ±0.10.

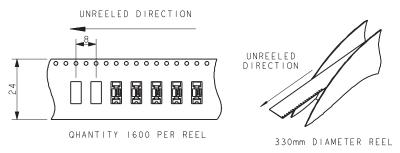


18-24 AWG: 70-9296


Through Board Contact - Top Entry Wire (Metal Board)



70-9296-001-133-006
9296 VERTICAL MOUNT SMT CONTACT
THROUGH BOARD CONTACT – TOP ENTRY WIRE (METAL BOARD)

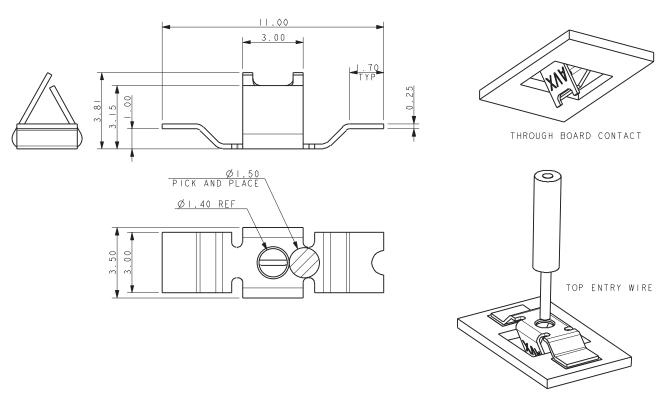


SUGGESTED PCB LAYOUT

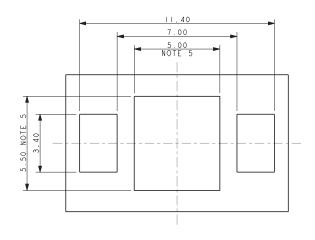

NOTES:

- CONTACT MOUNTS THROUGH THE BOARD, WIRE INSERTED FROM TOP SIDE OF BOARD.
- STYLE RECOMMENDED FOR METAL CLAD BOARDS WHERE ADDITIONAL CLEARANCE REQUIRED TO CONTACT AND MOUNTING PADS.
- 3. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-175.
- 4. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 5. HOLE DIMENSIONS FOR CONTACT.
- 6. PACING IN TAPE AND REEL, 2000 PIECES PER REEL.
- 7. FOR WIRE TRIM DETAILS REFER TO PAGE 115.
- 8. UL REFERENCE E90723.
- 9. GENERAL TOLERANCE ±0.10.

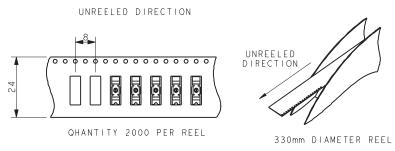


18-24 AWG: 70-9296

Wire Trim Details



9296 VERTIAL MOUNT SMT CONTACT WIRE TRIM DETAILS




WIRE STRIP LENGTH, ALL STYLES



70-9296-001-103-006



70-9296-001-113-006



70-9296-001-123-006



70-9296-001-133-006

NOTES:

- 1. FOR FULL ASSEMBLY PROCEDURE REFER TO APPLICATION NOTES 201-01-175.
- 2. THE SAME WIRE STRIP LENGTH APPLIES TO ALL STYLES.
- 3. STRANDED WIRES SHOULD BE TWISTED TO PREVENT SINGLE STRANDS BECOMING DETACHED WHEN INSERTED INTO CONTACT.

22-26 AWG: 70-9296

General Information





AVX continues to develop innovative connectors for the industrial electronics market that provide significant benefits over existing, outdated connector solutions. The latest release is single vertical Wire-to-Board (WTB) contacts that provide cost effective, yet robust discrete wire termination without the expense of an insulator and assembly costs. This new family of top and bottom entry contacts compliments the existing vertical poke home connectors already on the market, providing a lower cost solution without jeopardizing performance.

The new contacts support both solid and stranded wires ranging from 26AWG down to 22AWG and current ratings as high as 8 amps. Due to the mechanical stiffness of the small contact, 26AWG stranded wires may need to be pre-tinned to facilitate insertion. The set of four contacts provide both top and bottom entry for FR4 and metal core printed circuit boards.

APPLICATIONS

- Machine Controls: motors, drives, solenoids, sensors, fans and pumps
- · Commercial Buildings: controls, security, fire and sensors
- · Smart Grid: meters, breakers and panels
- · SSL/LED; bulbs, fixtures, signage and streetlights
- Application notes: refer to 201-01-175

FEATURES AND BENEFITS

- Dual Beam contact provides maximum mechanical stability and wire retention
- · Tape and reel packaged for automated SMT placement
- Staged current rating based on AWG, maximum is 8A (22AWG)
- Increased functionality with the single contact placement: multiple contacts and/or specific individual locations

ELECTRICAL

- Voltage Rating: 300V
 Based on placement distance
- Current Rating: See matrix below

ENVIRONMENTAL

 Operating Temperature: -40°C to +125°C

MECHANICAL

- Contact Material: Phosphor Bronze
- · Contact Plating: Tin over Nickel
- Durability: 5 Cycles

HOW TO ORDER





Contact Style

Code	Contact Location	Wire Insertion Direction	Recommended For Board Type	Wire Gauges*
102	Top Side	Bottom Entry	FR4	22 AWG - 26 AWG
112	Through Board	Top Entry	FR4	22 AWG - 26 AWG
122	Top Side	Bottom Entry	Metal Based	22 AWG - 26 AWG
132	Through Board	Top Entry	Metal Based	22 AWG - 26 AWG
4				

Plating Options
006 = Pure Tin All Over



CURRENT RATING

22AWG	24AWG	26AWG
8A	6A	5A

Certification: UL File #E90723


^{* 26} AWG stranded wires may require tinning to aid insertion.


22-26 AWG: 70-9296

Top Side Contact - Bottom Entry Wire (FR4 Board)




70-9296-001-102-006
9296 VERTICAL MOUNT SMT CONTACT
TOP SIDE CONTACT – BOTTOM ENTRY WIRE (FR4 BOARD)

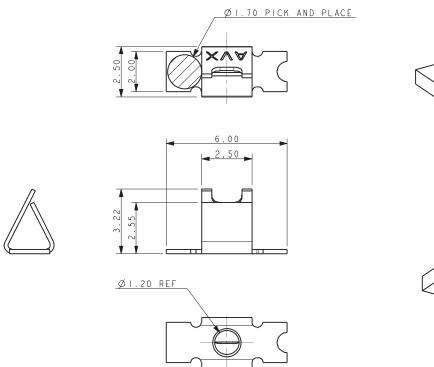









SUGGESTED PCB LAYOUT

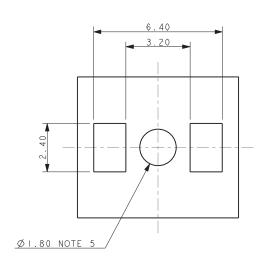

NOTES:

- CONTACT MOUNTS ON TOP SIDE OF BOARD, WIRE INSERTED FROM UNDERSIDE OF BOARD.
- 2. STYLE RECOMMENDED FOR FR4 BOARDS WHERE ADDITIONAL CLEARANCE REQUIRED TO CONTACTS AND MOUNTING PADS.
- 3. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-175.
- 4. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 5. HOLE FOR WIRE INSERTION.
- 6. PACKING IN TAPE AND REEL, 2000 PIECES PER REEL.
- 7. FOR WIRE TRIM DETAILS REFER TO PAGE 121.
- 8. WIRE SIZES REFER TO PAGE 116.
- 9. GENERAL TOLERANCE ±0.10.
- 10. UL REFERENCE E90723 (US AND CANADA).






330mm DIAMETER REEL


22-26 AWG: 70-9296

Through Board Contact - Top Entry Wire (FR4 Board)




70-9296-001-112-006
9296 VERTICAL MOUNT SMT CONTACT
THROUGH BOARD CONTACT – TOP ENTRY WIRE (FR4 BOARD)

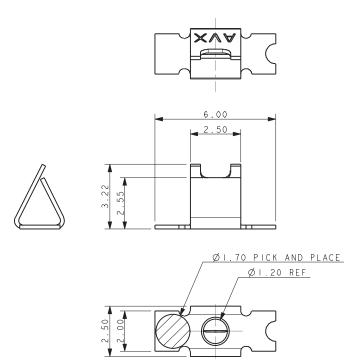




THROUGH BOARD CONTACT

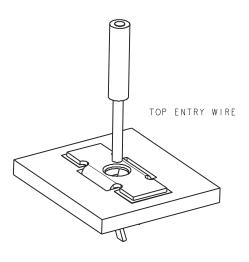


SUGGESTED PCB LAYOUT

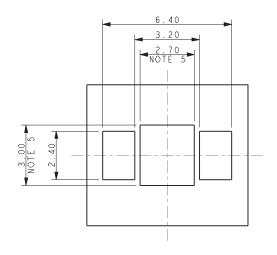

NOTES:

- 1. CONTACT MOUNTS THROUGH THE BOARD, WIRE INSERTED FROM TOP SIDE OF BOARD.
- 2. STYLE RECOMMENDED FOR FR4 BOARDS WHERE ADDITIONAL CLEARANCE REQUIRED TO CONTACT AND MOUNTING PADS.
- 3. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-175.
- 4. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 5. HOLE DIMENSIONS FOR CONTACT.
- 6. PACKING IN TAPE AND REEL, 2000 PIECES PER REEL.
- 7. FOR WIRE TRIM DETAILS REFER TO PAGE 121.
- 8. WIRE SIZES REFER TO PAGE 116.
- 9. GENERAL TOLERANCE ±0.10.
- 10. UL REFERENCE E90723 (US AND CANADA).






330mm DIAMETER REEL

22-26 AWG: 70-9296


Top Side Contact - Bottom Entry Wire (Metal Board)




70-9296-001-122-006
9296 VERTICAL MOUNT SMT CONTACT
TOP SIDE CONTACT – BOTTOM ENTRY WIRE (METAL BOARD)

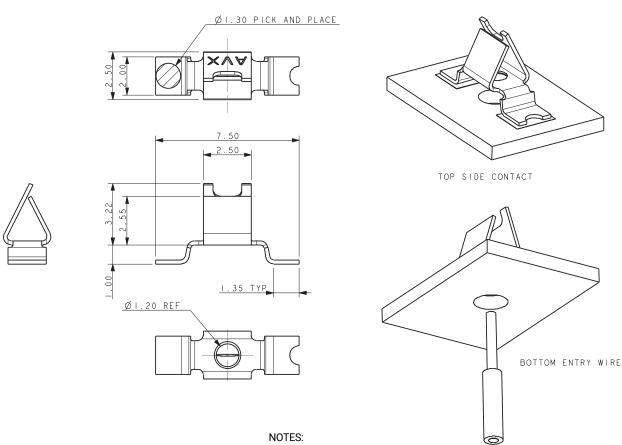

SUGGESTED PCB LAYOUT

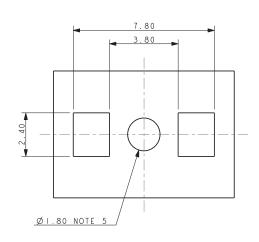

- CONTACT MOUNTS ON TOP SIDE OF BOARD, WIRE INSERTED FROM UNDERSIDE OF BOARD.
- STYLE RECOMMENDED FOR METAL CLAD BOARDS WHERE ADDITIONAL CLEARANCE REQUIRED TO CONTACTS AND MOUNTING PADS.
- 3. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-150.
- 4. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 5. HOLE FOR WIRE INSERTION.
- 6. PACKING IN TAPE AND REEL, 1600 PIECES PER REEL.
- 7. FOR WIRE TRIM DETAILS REFER TO PAGE 121.
- 8. WIRE SIZES REFER TO PAGE 116.
- 9. GENERAL TOLERANCE ±0.10.
- 10. UL REFERENCE E90723 (US AND CANADA).

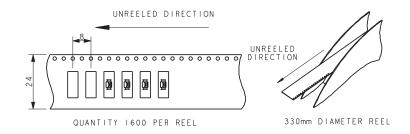



22-26 AWG: 70-9296


Through Board Contact - Top Entry Wire (Metal Board)




70-9296-001-132-006
9296 VERTICAL MOUNT SMT CONTACT
THROUGH BOARD CONTACT – TOP ENTRY WIRE (METAL BOARD)

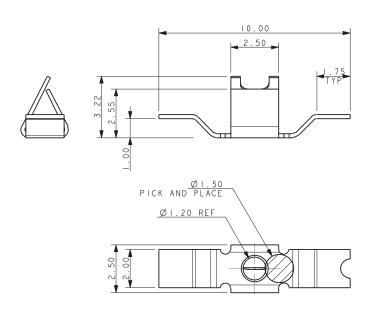

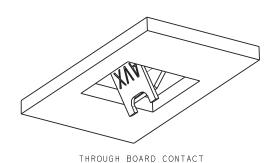

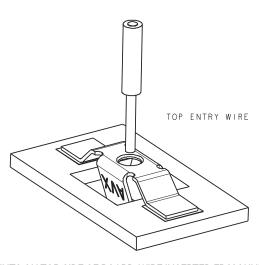


SUGGESTED PCB LAYOUT

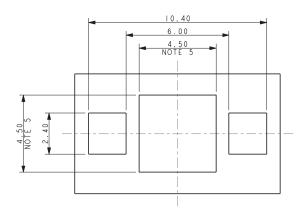

NOTES:

- CONTACT MOUNTS ON TOP SIDE OF BOARD, WIRE INSERTED FROM UNDERSIDE OF BOARD.
- STYLE RECOMMENDED FOR METAL CLAD BOARDS WHERE ADDITIONAL CLEARANCE REQUIRED TO CONTACTS AND MOUNTING PADS.
- FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-161 AND APPLICATION NOTES 201-01-175.
- 4. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 5. HOLE FOR WIRE INSERTION.
- 6. PACKING IN TAPE AND REEL, 2000 PIECES PER REEL.
- 7. FOR WIRE TRIM DETAILS REFER TO PAGE 121.
- 8. WIRE SIZES REFER TO PAGE 116.
- 9. GENERAL TOLERANCE ±0.10.
- 10. UL REFERENCE E90723 (US AND CANADA).






330mm DIAMETER REEL

22-26 AWG: 70-9296


Wire Trim Details



9296 VERTIAL MOUNT SMT CONTACT WIRE TRIM DETAILS




WIRE STRIP LENGTH, ALL STYLES



70-9296-001-103-006



70-9296-001-113-006



70-9296-001-123-006



70-9296-001-133-006

NOTES:


- 1. FOR FULL ASSEMBLY PROCEDURE REFER TO APPLICATION NOTES 201-01-175.
- 2. THE SAME WIRE STRIP LENGTH APPLIES TO ALL STYLES.
- 3. STRANDED WIRES SHOULD BE TWISTED TO PREVENT SINGLE STRANDS BECOMING DETACHED WHEN INSERTED INTO CONTACT.
- 4. SUITABLE FOR SOLID AND STRANDED WIRES 22AWG, 24AWG AND 26AWG. STRANDED WIRES 26AWG MAY REQUIRE TINNING TO AID INSERTION.

POKE-HOME: LOW PROFILE HORIZONTAL

20-26 AWG: 9296-200

General Information





The new 9296 series connector provides a quick and reliable wire-to-board termination in a sleek 3.0mm pitch by 2.5mm high SMT package for a broad range of industrial and commercial applications. With almost every product on the market having to deal with a small number of discrete wires connecting components to a PCB, the 9296 connector series meets this challenge by simply stripping the wire and inserting them into a 1 to 6 position connector. This makes the connector very cost effective and termination friendly within the factory as well as in the field by electrical installers.

Developed for harsh industrial applications, the connector integrates the already proven 2mm dual beam poke-home contact into a connector housing. The high spring force Phosphor Bronze contact accepts a wide range (20-26AWG solid or stranded) of wire to accommodate any wire combination within a single connector.

APPLICATIONS

- Machine Controls: motors, drives, solenoids, sensors, fans and pumps
- · Commercial Buildings: controls, security, fire and sensors
- · Smart Grid: meters, breakers and panels
- SSL/LED: bulbs, fixtures, signage and streetlights
- · Application notes: refer to 201-01-167

FEATURES AND BENEFITS

- Simple strip and poke-home wire insertion with easy twist and pull wire extraction
- · 2.5mm height achieves the lowest height possible for this AWG range
- · Accepts 20-26 AWG solid and stranded wires
- High spring force dual beam box contact provides maximum mechanical stability and wire retention
- · UL approved
- Halogen free

ELECTRICAL

- Current Rating: See matrix below
- · Voltage Rating: 300 VAC


ENVIRONMENTAL

 Operating Temperature: -40°C to +130°C

MECHANICAL

- Insulator Material: Glass-Filled Nylon 46; UL94V0
- · Contact Material: Phosphor Bronze
- Plating: Tin over Nickel
- Durability: 3 Cycles

HOW TO ORDER



Description
20 = Horizontal
SMT Mount
Poke Home
Connector
21 = Horizontal
SMT Mount
Poke Home
Connector for
pass through
mating pins

Wire Gauge Size 20AWG to 26AWG Max ø 1.60mm Insulator Color
All Sizes
9 = UL White (Standard)
8 = UL Black (Special Order)

One Way Only (Special Order)
2 = UL Brown
3 = UL Blue
4 = UL Yellow
5 = UL Red
6 = UL Green
7 = UI. Orange





CURRENT RATING

	20AWG	22AWG	24AWG	26AWG
UL	8A	7A	6A	5A
cUL	6A	5A	3.75A	3.75A

Certification: UL File #E90723


POKE-HOME: LOW PROFILE HORIZONTAL

20-26 AWG: 9296-200

1 Position





9296 HORIZONTAL MOUNT POKE HOME CONNECTOR - 1 WAY

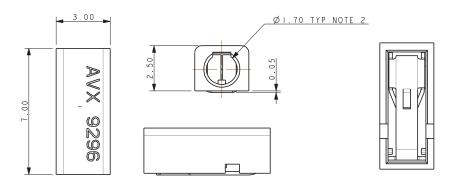


- 1. HORIZONTAL SMT MOUNT 1 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-166 AND APPLICATION NOTES 201-01-167.
- 2. SUITABLE FOR WIRES 20AWG TO 26AWG, MAXIMUM INSULATION 1.60MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-O, COLOR SEE PAGE 122.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY PER REEL 2000, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. OUTLINE OF CONNECTOR.
- 8. UL REFERENCE E90723 (US AND CANADA).

SUGGESTED PCB LAYOUT









QUANTITY PER REEL 2000

2 Position



9296 HORIZONTAL MOUNT POKE HOME CONNECTOR - 2 WAY

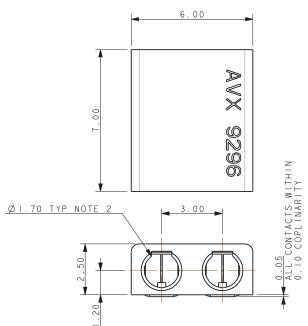






NOTES:

- HORIZONTAL SMT MOUNT 2 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-166 AND APPLICATION NOTES 201-01-167.
- SUITABLE FOR WIRES 20AWG TO 26AWG, MAXIMUM INSULATION 1.60MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-O, COLOR SEE PAGE 122.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY PER REEL 2000, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. OUTLINE OF CONNECTOR.
- 8. UL REFERENCE E90723 (US AND CANADA).

SUGGESTED PCB LAYOUT

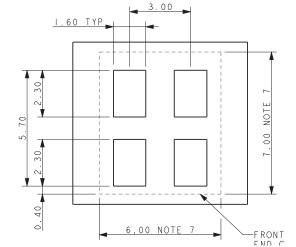






QUANTITY PER REEL 2000





3 Position



9296 HORIZONTAL MOUNT POKE HOME CONNECTOR - 3 WAY

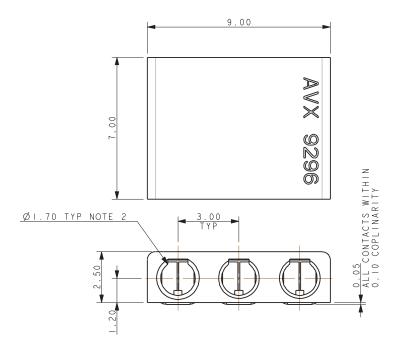






NOTES:

- HORIZONTAL SMT MOUNT 3 WAY POKE HOME CONNECTOR.
 FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-166 AND APPLICATION NOTES 201-01-167.
- SUITABLE FOR WIRES 20AWG TO 26AWG, MAXIMUM INSULATION 1.60MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-O, COLOR SEE PAGE 122.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY PER REEL 2000, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. OUTLINE OF CONNECTOR.
- 8. UL REFERENCE E90723 (US AND CANADA).

SUGGESTED PCB LAYOUT

FRONT (WIRE ENTRY) END OF CONNECTOR A DO NOTE 7






QUANTITY PER REEL 2000





4 Position



9296 HORIZONTAL MOUNT POKE HOME CONNECTOR - 4 WAY

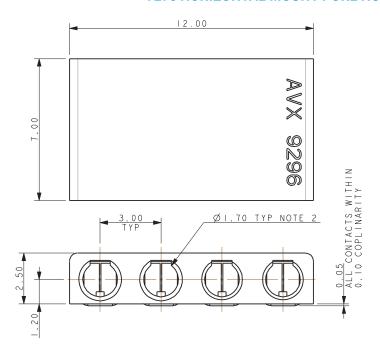




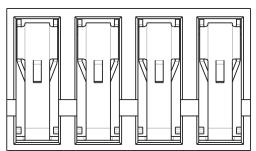



NOTES:

- 1. HORIZONTAL SMT MOUNT 4 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-166 AND APPLICATION NOTES 201-01-167.
- 2. SUITABLE FOR WIRES 20AWG TO 26AWG, MAXIMUM INSULATION 1.60MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-O, COLOR SEE PAGE 122.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY PER REEL 2000, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. OUTLINE OF CONNECTOR.
- 8. UL REFERENCE E90723 (US AND CANADA).

SUGGESTED PCB LAYOUT

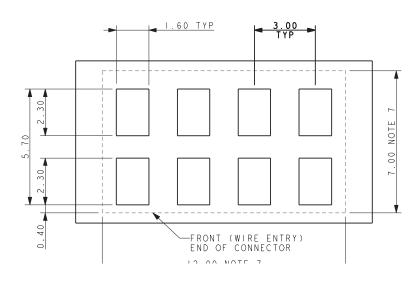






QUANTITY PER REEL 2000


20-26 AWG: 9296-200

5 Position



9296 HORIZONTAL MOUNT POKE HOME CONNECTOR - 5 WAY

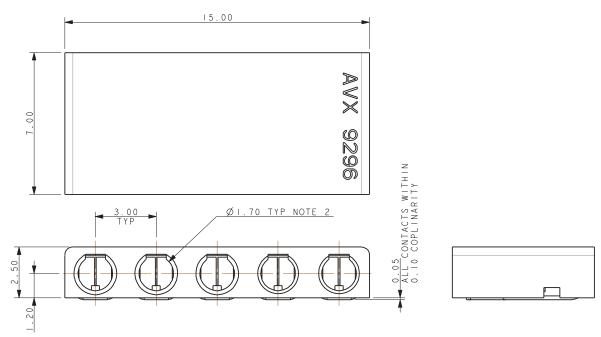

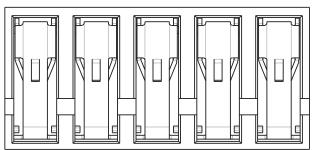


NOTES:

- 1. HORIZONTAL SMT MOUNT 5 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-166 AND APPLICATION NOTES 201-01-167.
- SUITABLE FOR WIRES 20AWG TO 26AWG, MAXIMUM INSULATION 1.60MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-O, COLOR SEE PAGE 122.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY PER REEL 2000, 330MM REEL.
- 6. GENERAL TOLERANCE ±0.20.
- 7. OUTLINE OF CONNECTOR.
- 8. UL REFERENCE E90723 (US AND CANADA).

SUGGESTED PCB LAYOUT

FRONT (WIRE ENTRY) END OF CONNECTOR

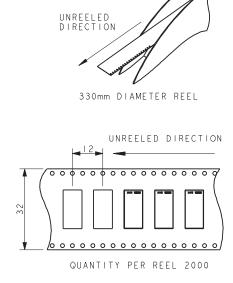





20-26 AWG: 9296-200

6 Position



9296 HORIZONTAL MOUNT POKE HOME CONNECTOR - 6 WAY

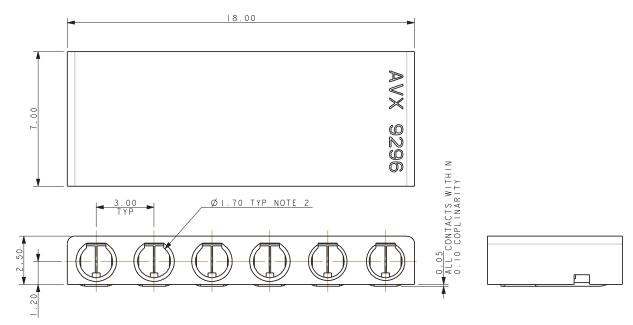

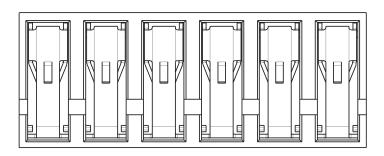

NOTES:


- 1. HORIZONTAL SMT MOUNT 6 WAY POKE HOME CONNECTOR. FOR FURTHER DETAILS REFER TO PRODUCT SPECIFICATION 201-01-166
 - AND APPLICATION NOTES 201-01-167.
- 2. SUITABLE FOR WIRES 20AWG TO 26AWG, MAXIMUM INSULATION 1.60MM DIAMETER.
- 3. INSULATOR: NYLON 46, GLASS FILLED, UL94 V-O, COLOR SEE PAGE 122.
- 4. CONTACT: TIN PLATED COPPER ALLOY.
- 5. PACKING IN TAPE AND REEL, QTY PER REEL 2000, 330MM REEL.

UNREELED DIRECTION

- 6. GENERAL TOLERANCE ±0.20.
- 7. OUTLINE OF CONNECTOR.
- 8. UL REFERENCE E90723 (US AND CANADA).

SUGGESTED PCB LAYOUT

1.60 TYP 70 00 -FRONT (WIRE ENTRY) END OF CONNECTOR




POKE-HOME: LOW PROFILE HORIZONTAL

20-26 AWG: 9296-200


Assembly




9296 HORIZONTAL MOUNT POKE HOME CONNECTOR - ASSEMBLY



WIRE STRIP LENGTH

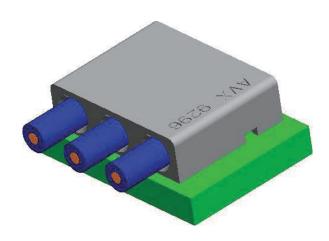

REFER TO APPLICATION NOTES 201-01-167 FOR FULL ASSEMBLY PROCEDURE

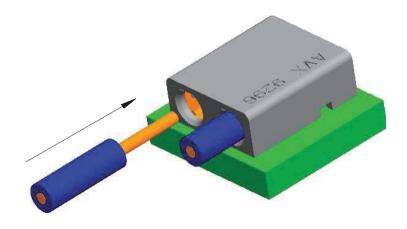



FOLLOW US:

VISIT US AT

North America Tel: +1 864-967-2150

Central America Tel: +55 11-46881960 Europe

Tel: +44 1276-697000

Asia

Tel: +65 6286-7555

Japan

Tel: +81 740-321250